



INDUCTANCE	LOSSES	WEIGHT
18 mH	8 Watts	3 Lbs


NO.	CHANGE DESCRIPTION	BY	DATE	C/K'D
06	REVISED PER ECR M7186, ADDED CD	DP	9/01/10	
07	ECR M7227, CHANGE PART NAME TO 3-PHASE REACTOR.	PDH	10/13/10	

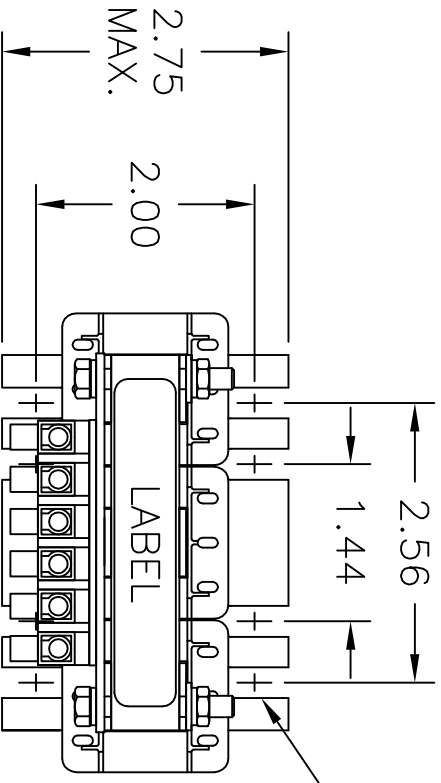

WIRE RANGE: 22-10 AWG

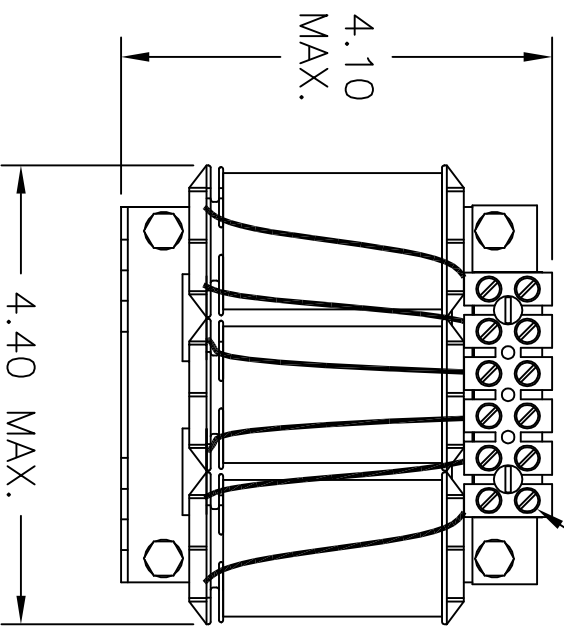

CAUTION-TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lb MAX.

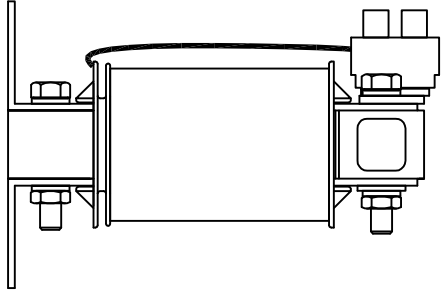

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] AND TOLERANCES ARE:

DECIMAL	FRACTION	DRILLED HOLES
ANGLES		

PART NAME:	3-PHASE REACTOR
DESCRIPTION:	OUTLINE DIMENSION
FINISH:	

MTE CORPORATION MEMONONEE FALLS, WISCONSIN			
CD RL-00104			
SCALE	NTS	DATE	02/06/03
DR.	BY	KFL	APP'D
REV.	07		