APPROX WEIGHT (LBS.)
72

ECO No	DESCRIPTION	REV BY	DATE
M9346	LABEL GRAPHICS UPDATED	JT	10/21/14

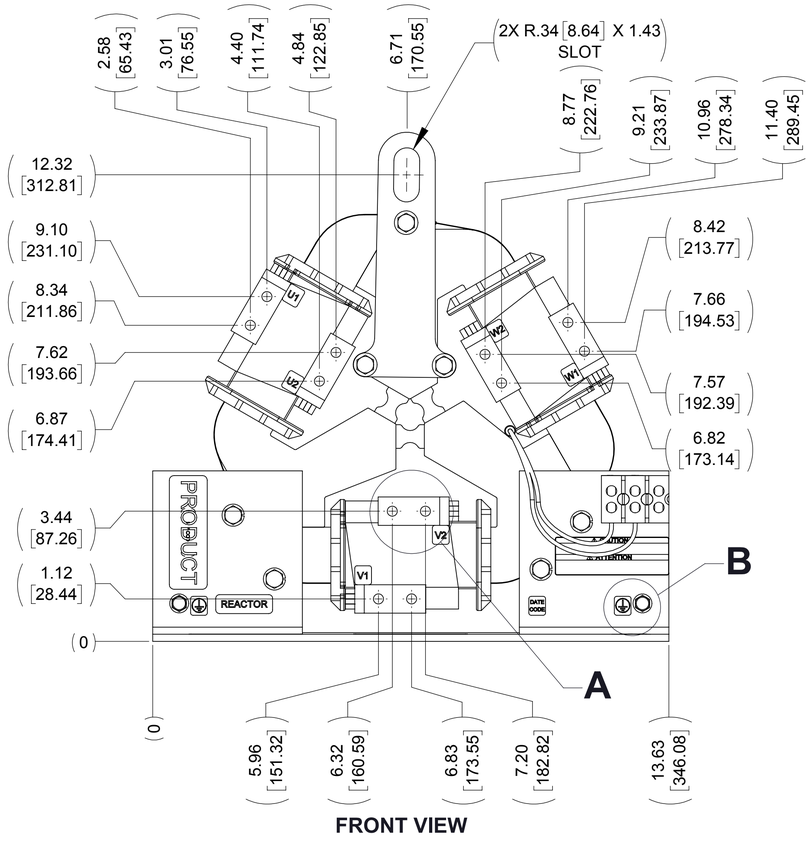

FRONT VIEW

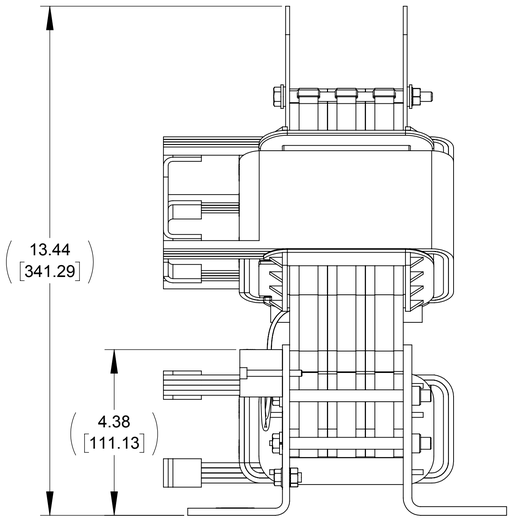

SIDE VIEW

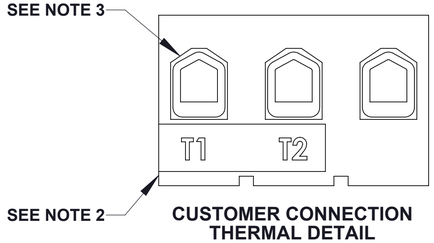

CUSTOMER CONNECTION
THERMAL DETAIL

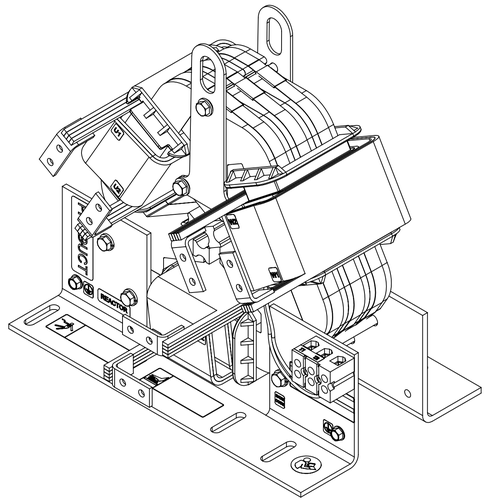

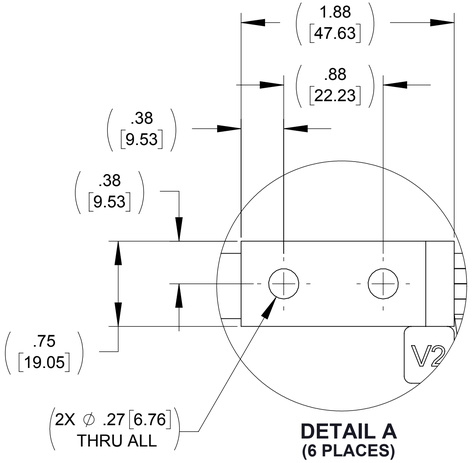

DETAIL A
(6 PLACES)

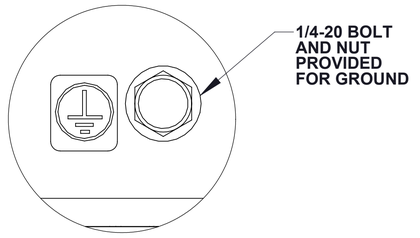

DETAIL B
(GROUND CONNECTION)
(2 PLACES)

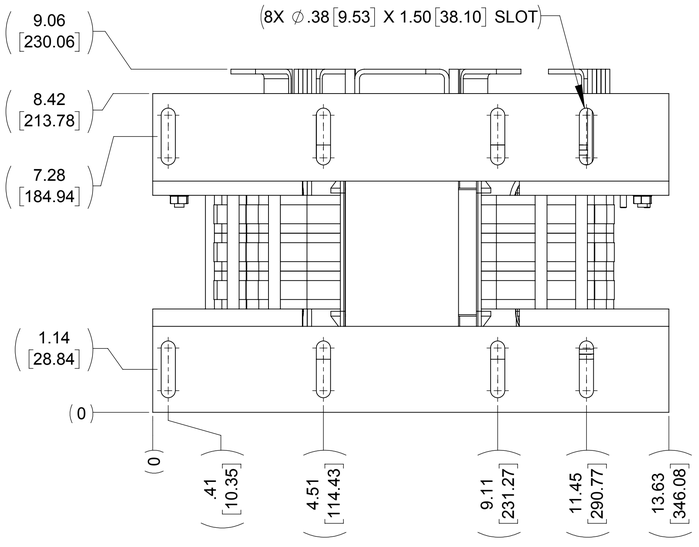

BOTTOM VIEW

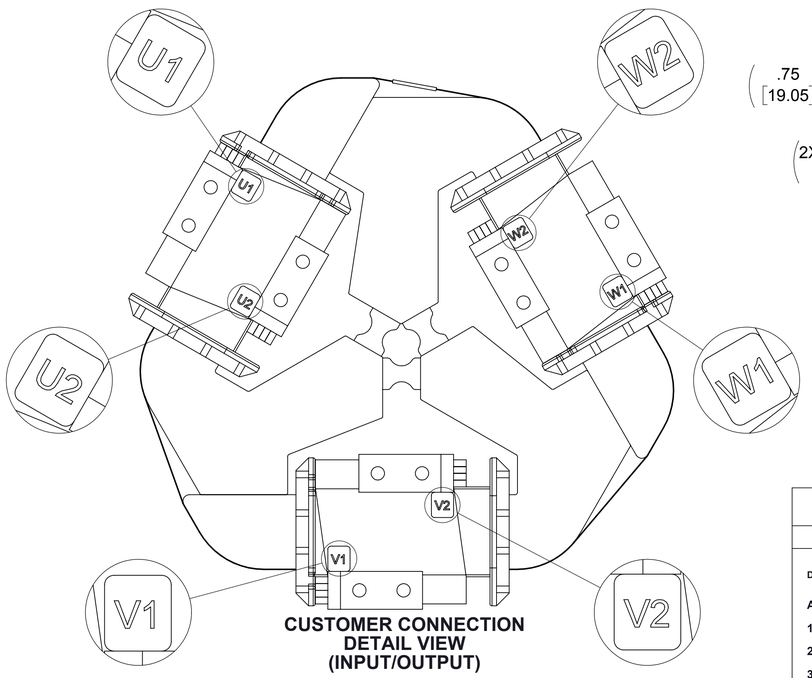

CUSTOMER CONNECTION
DETAIL VIEW
(INPUT/OUTPUT)

NOTES:

1. FILTER REQUIRES MTE P/N: RESPANEL-012 (QTY. 1)
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 4-18 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
AN SL POWER ELECTRONICS COMPANY

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455.4683
262.253.8200

MATERIAL

DRAWN MM	DATE 07/23/14
CHECKED TM	DATE 10/22/14
APPROVED TM	DATE 10/22/14

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

DV SENTRY 160A 380-600V
FILTER, OPEN PANEL

SIZE	DWG No.	REV
D	CD DVSP0160E	02

SCALE 1:2 SHEET 1 OF 1