
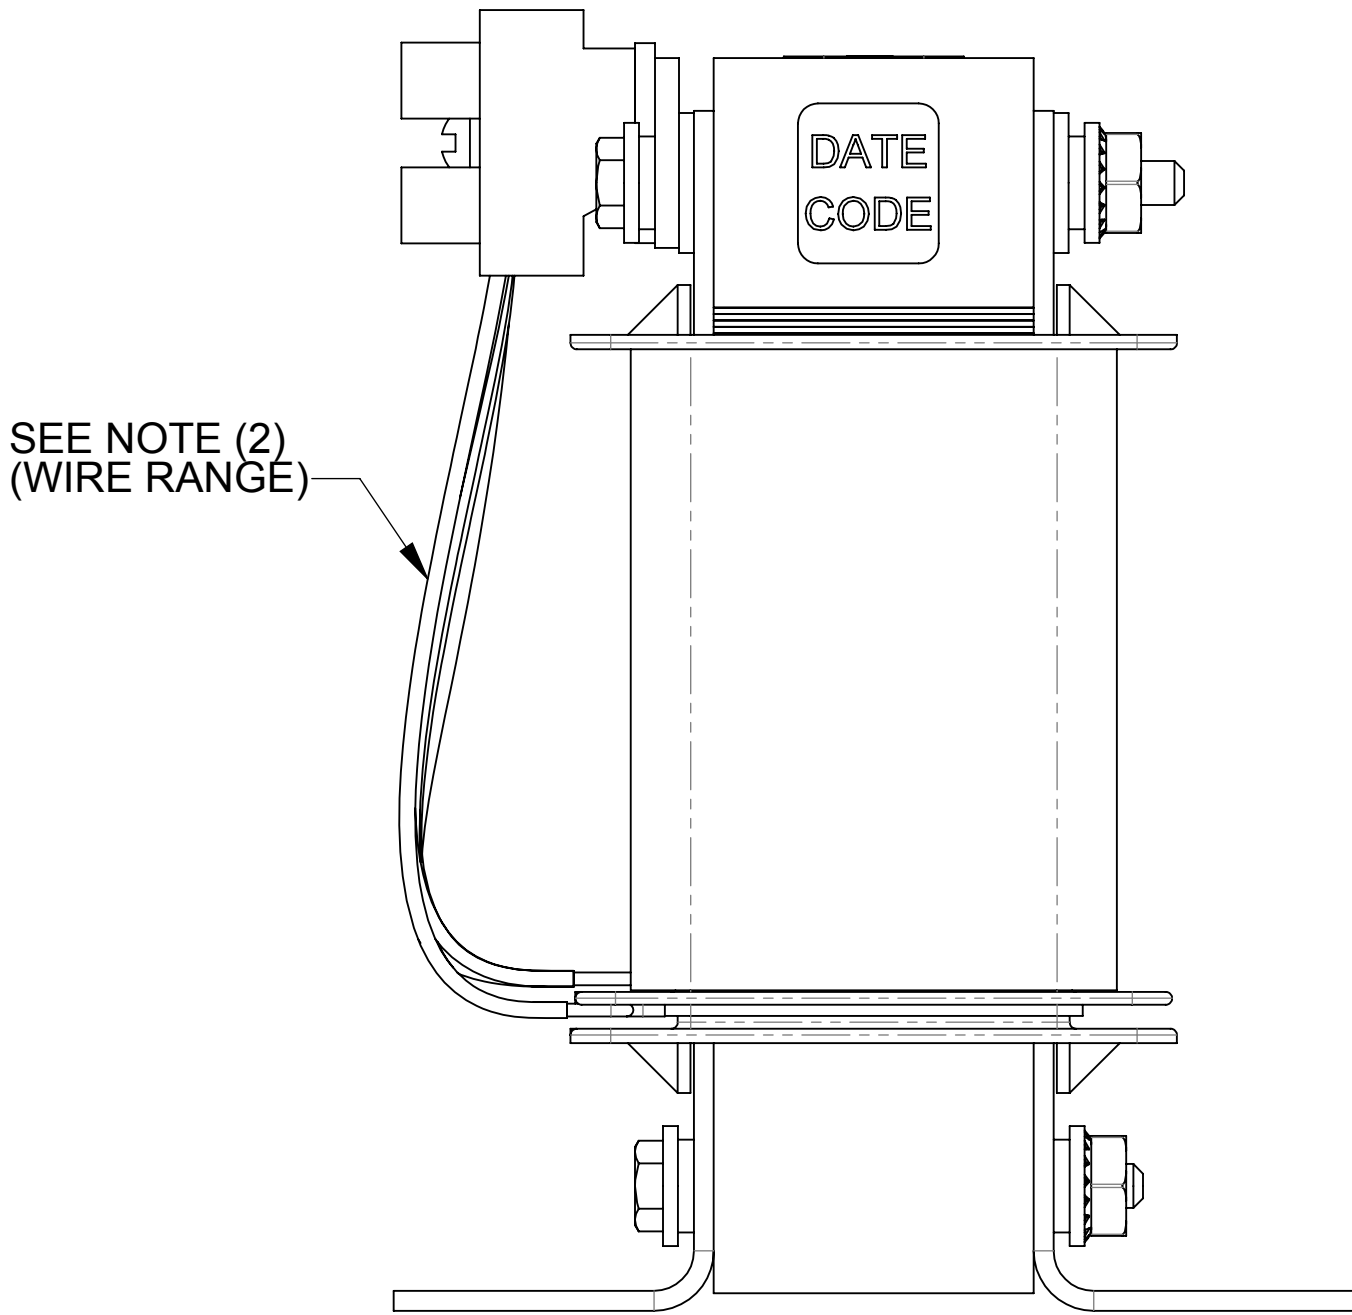
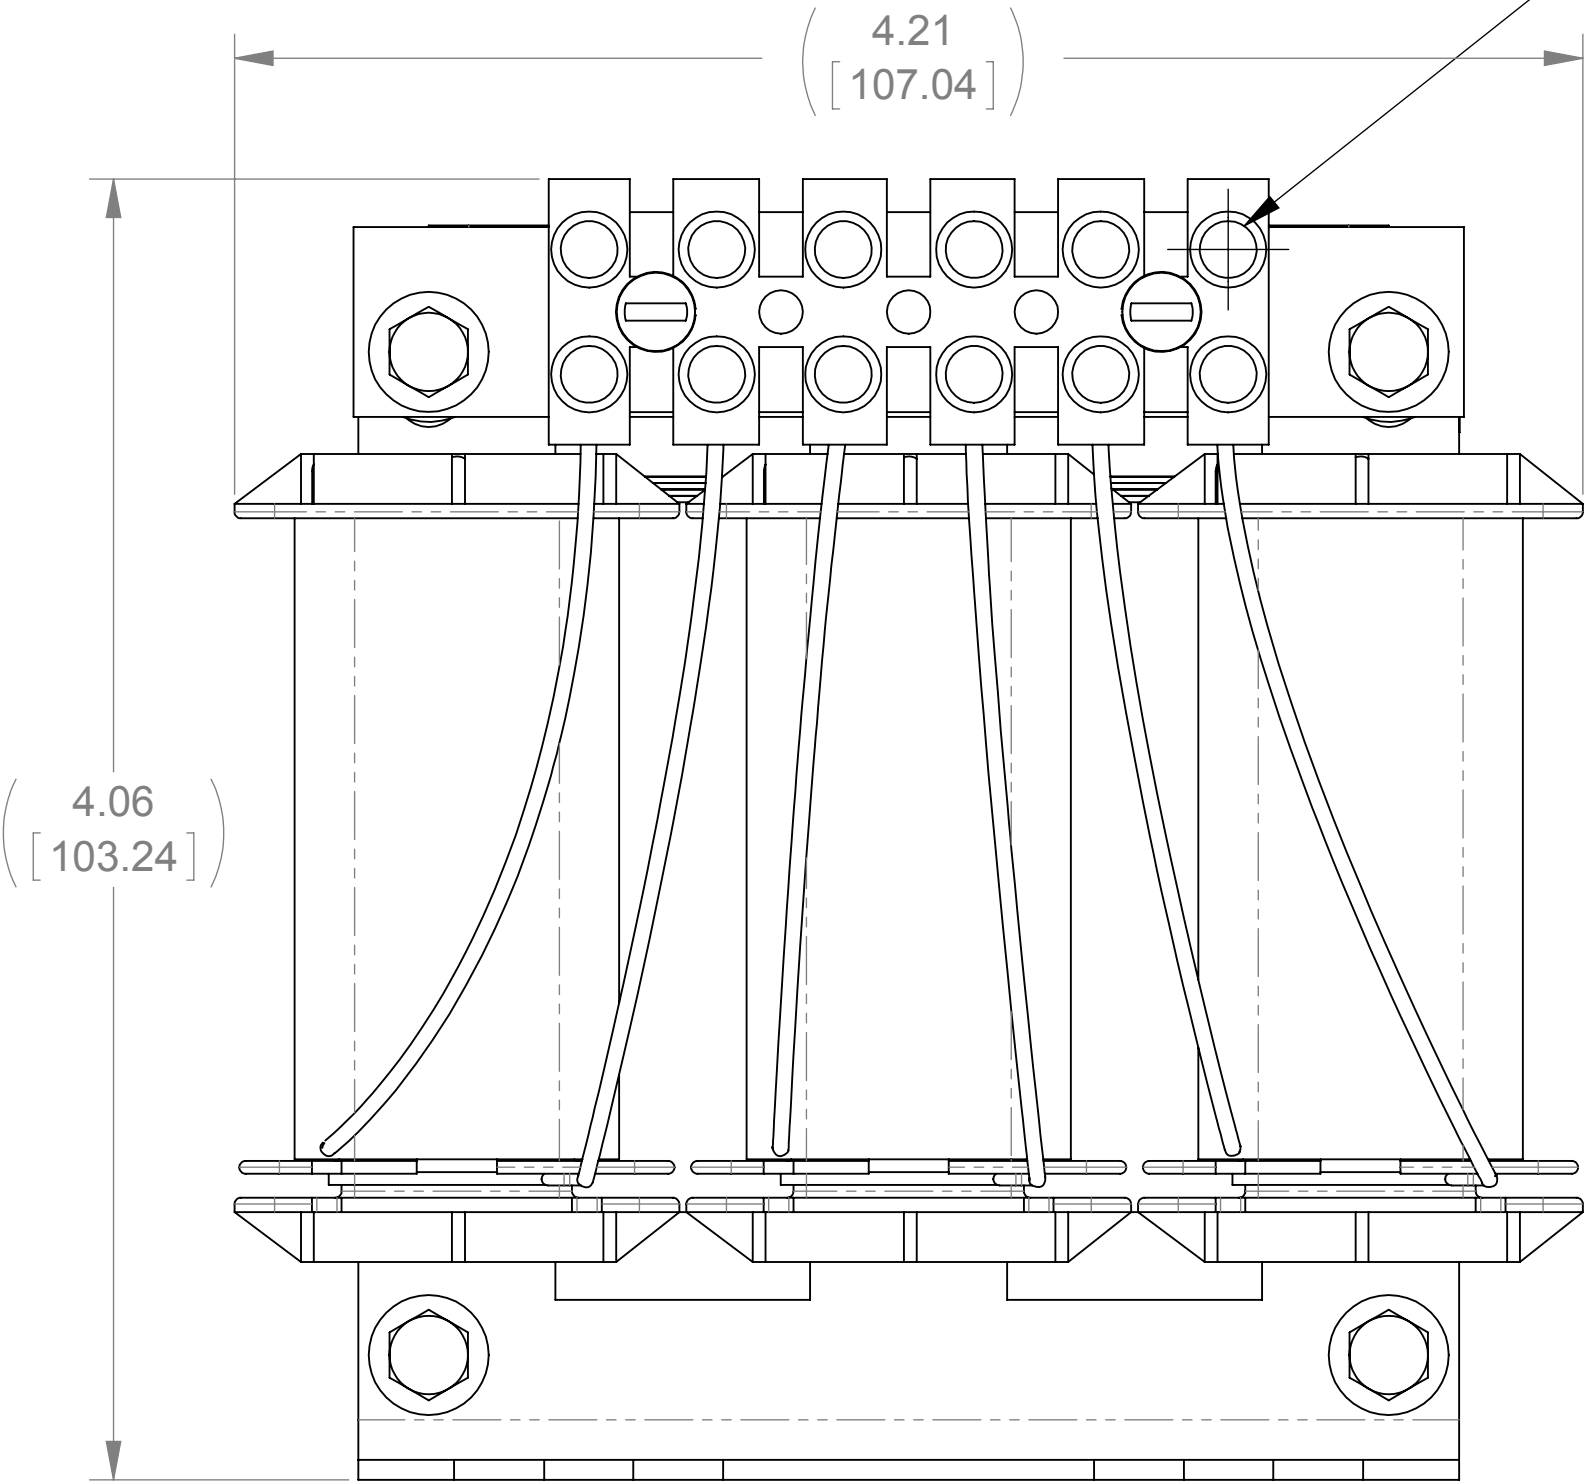
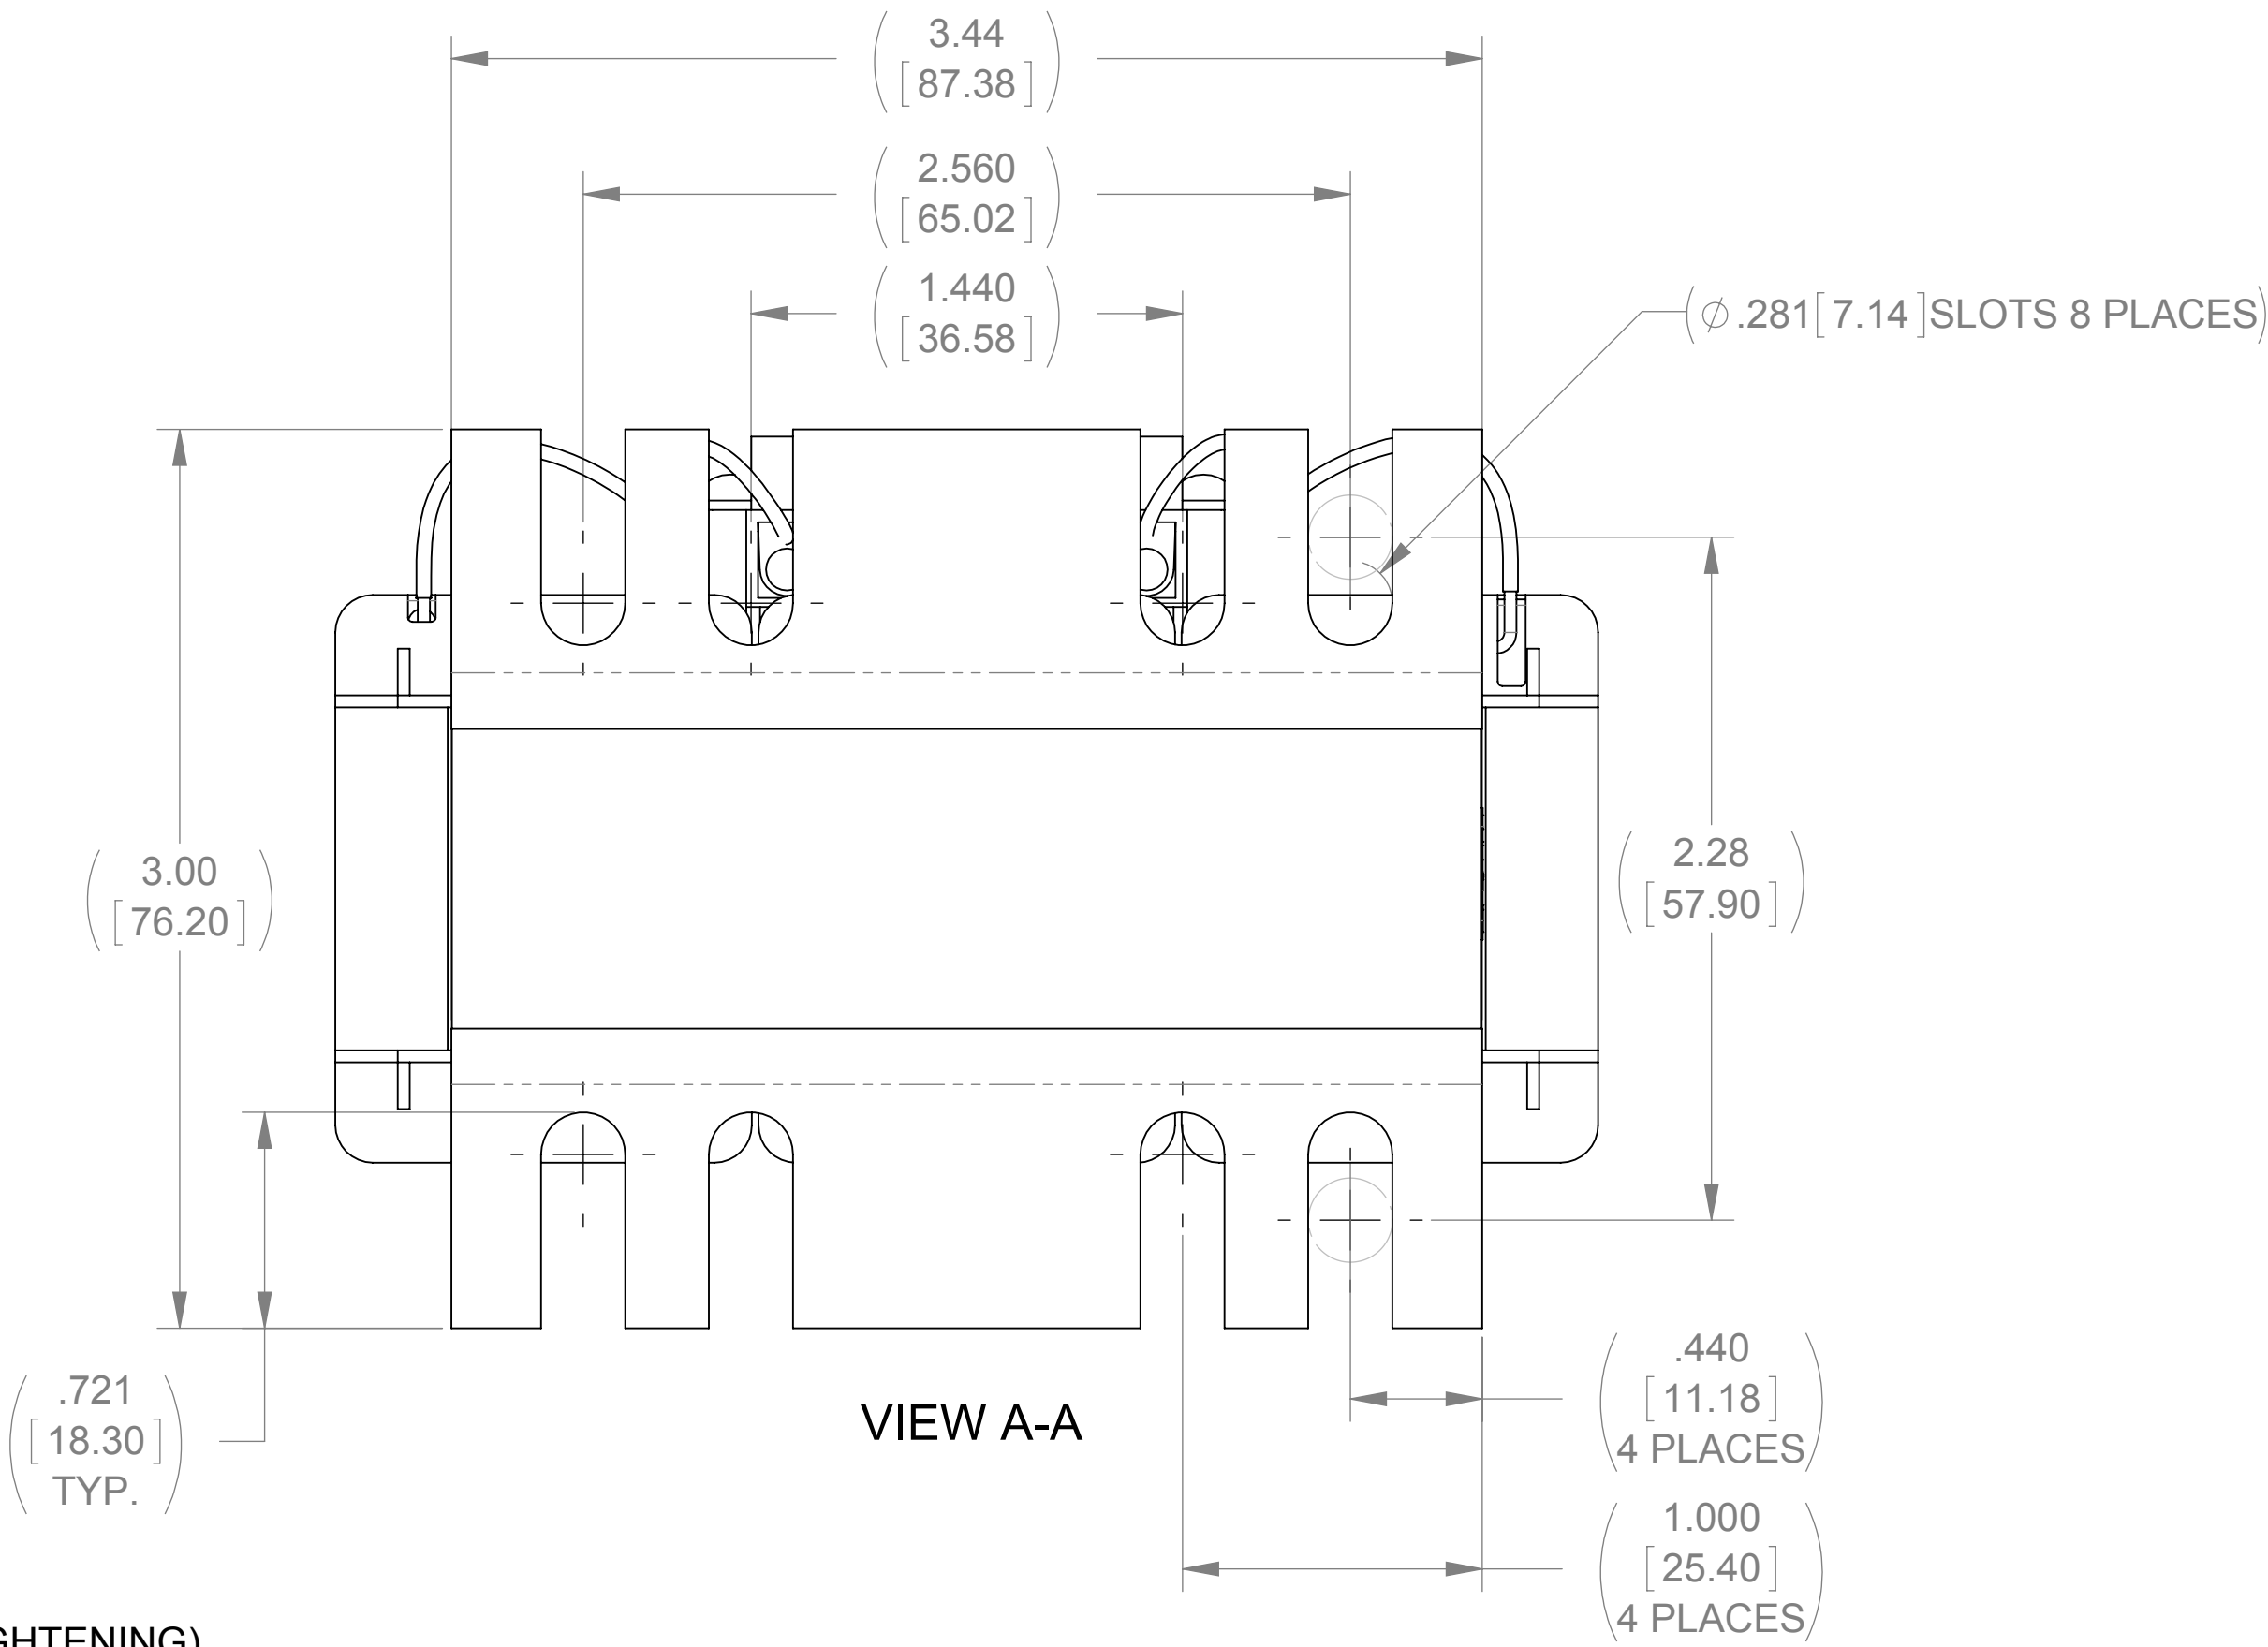


8	7	
WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
4	2.1mH	40.9

ECO No	DESCRIPTION	REV BY	DATE
M8321	DIMENSION CHANGE	JP	12/14/12

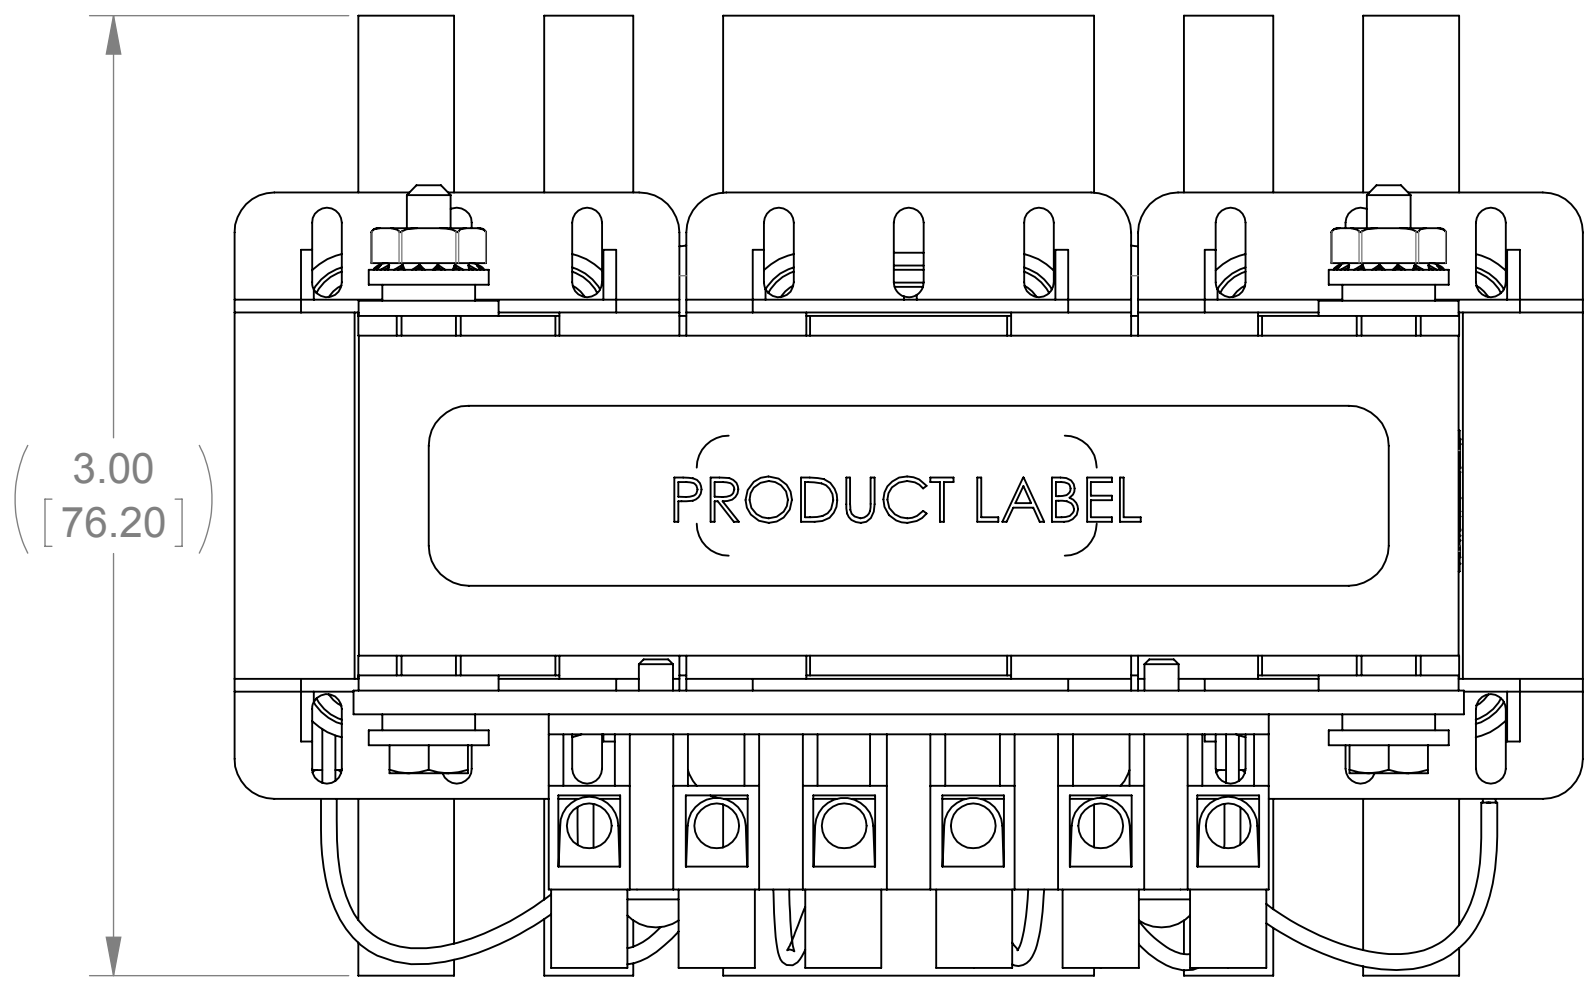

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lbs MAX
  2. WIRE RANGE: 22 - 10 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:				DESCRIPTION	
ANGLES: ± 1 °				LINE REACTOR	
1 PLACE .XX: ± .1 [2.5]		DRAWN	DATE		
2 PLACE .XX: ± .03 [0.76]		JP	08/29/12		
3 PLACE .XXX: ± .010 [0.254]		CHECKED	DATE		
		TM	12/21/12		
		APPROVED	DATE		
		TM	12/21/12		
				SIZE	REV
				D	06
				SCALE	
				5:3	
				SHEET 1 OF 1	