

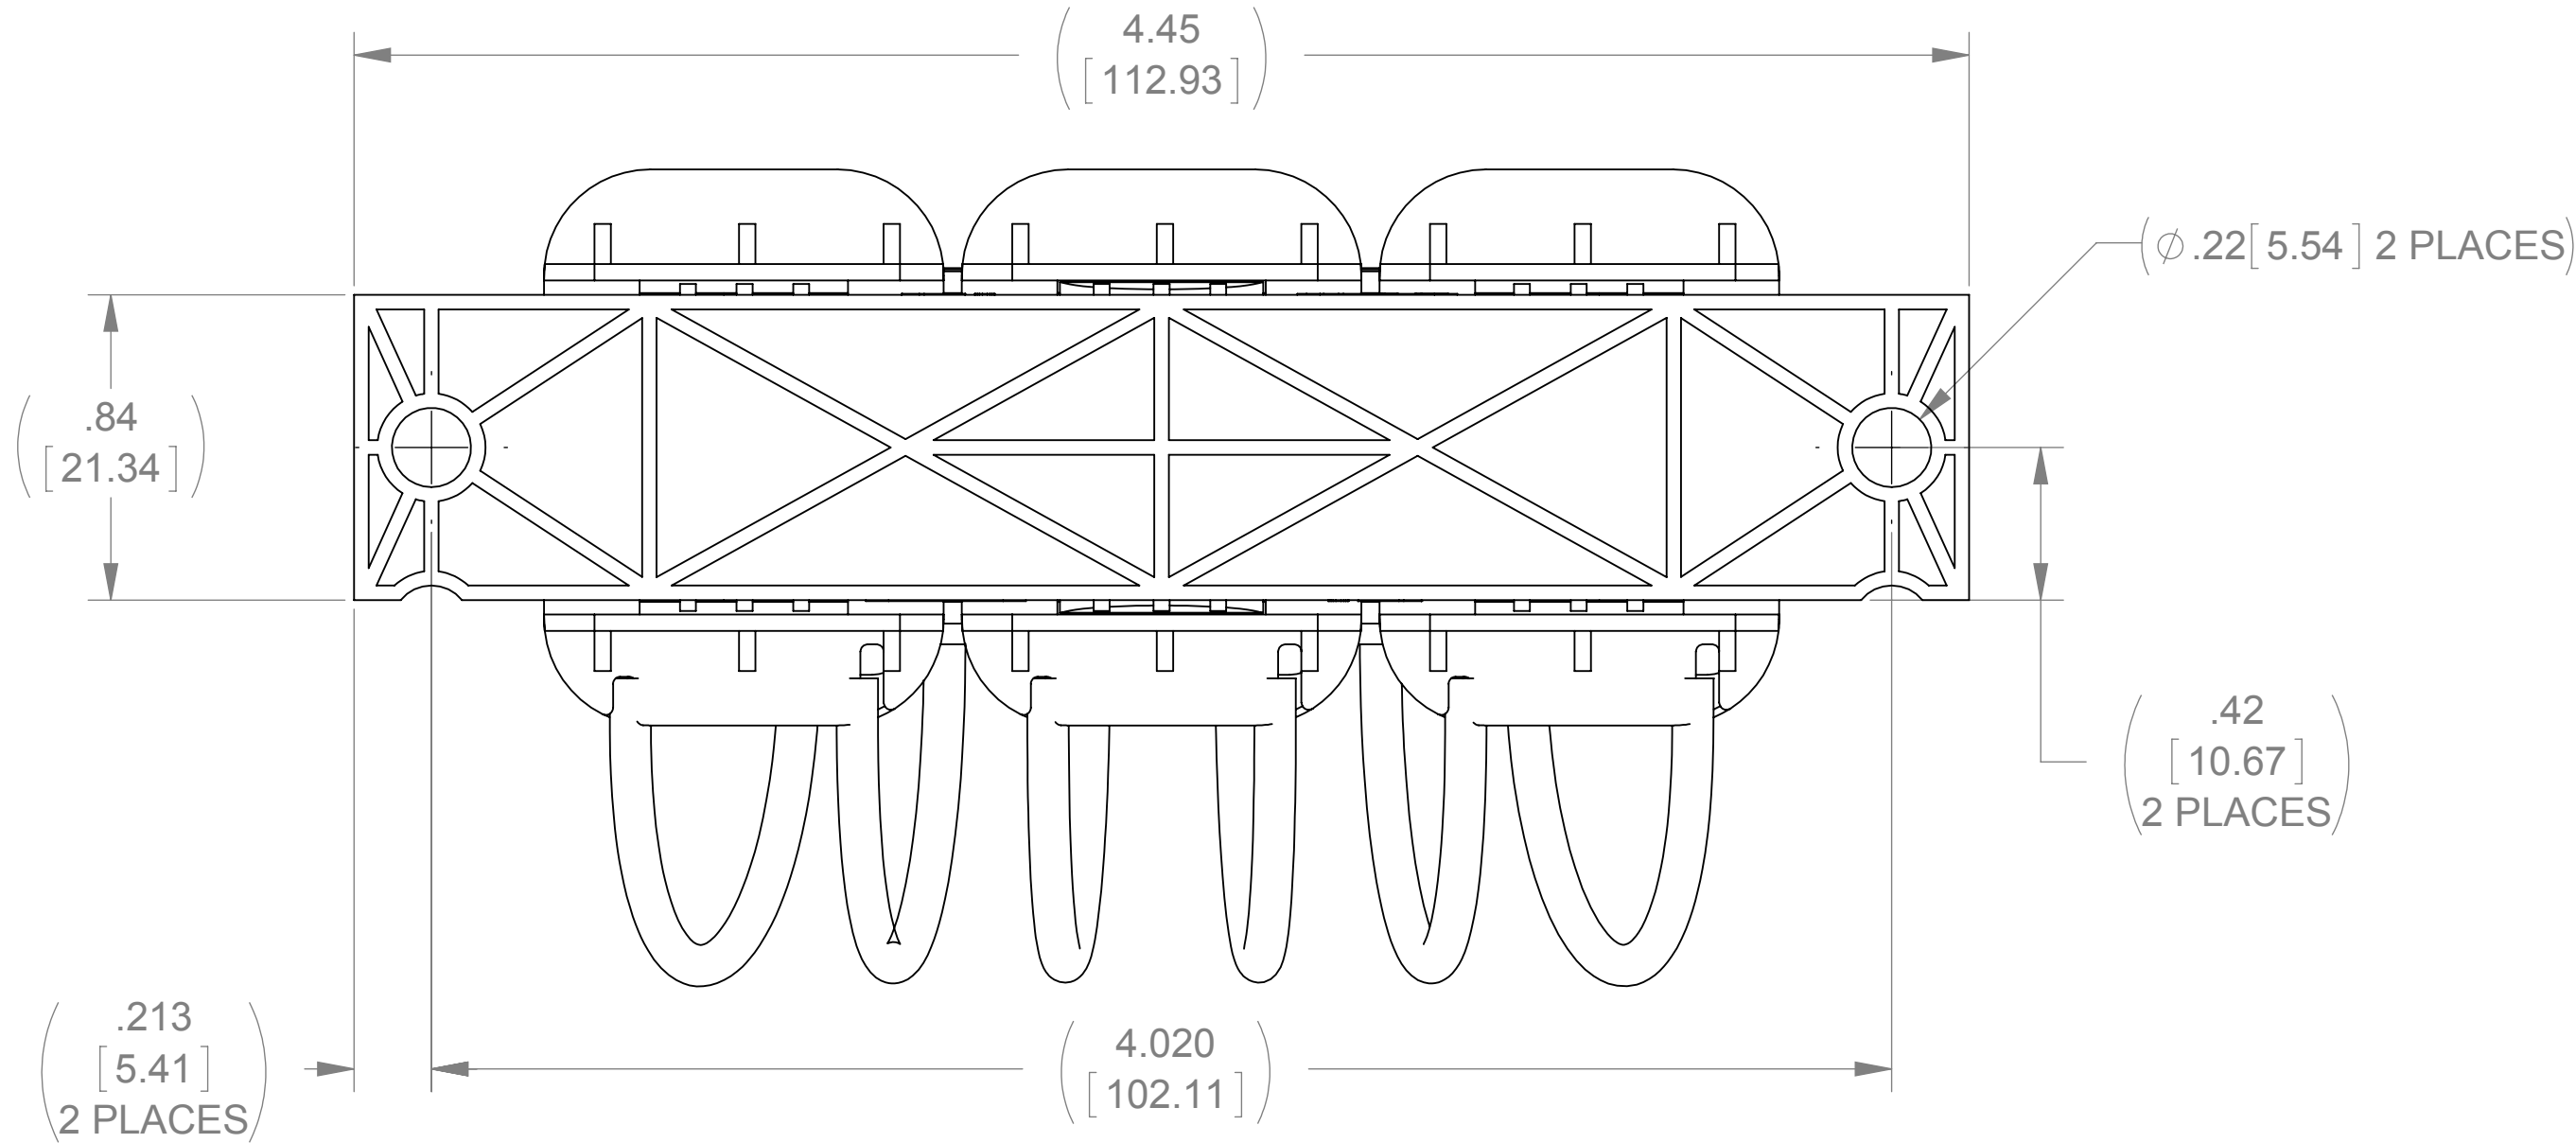
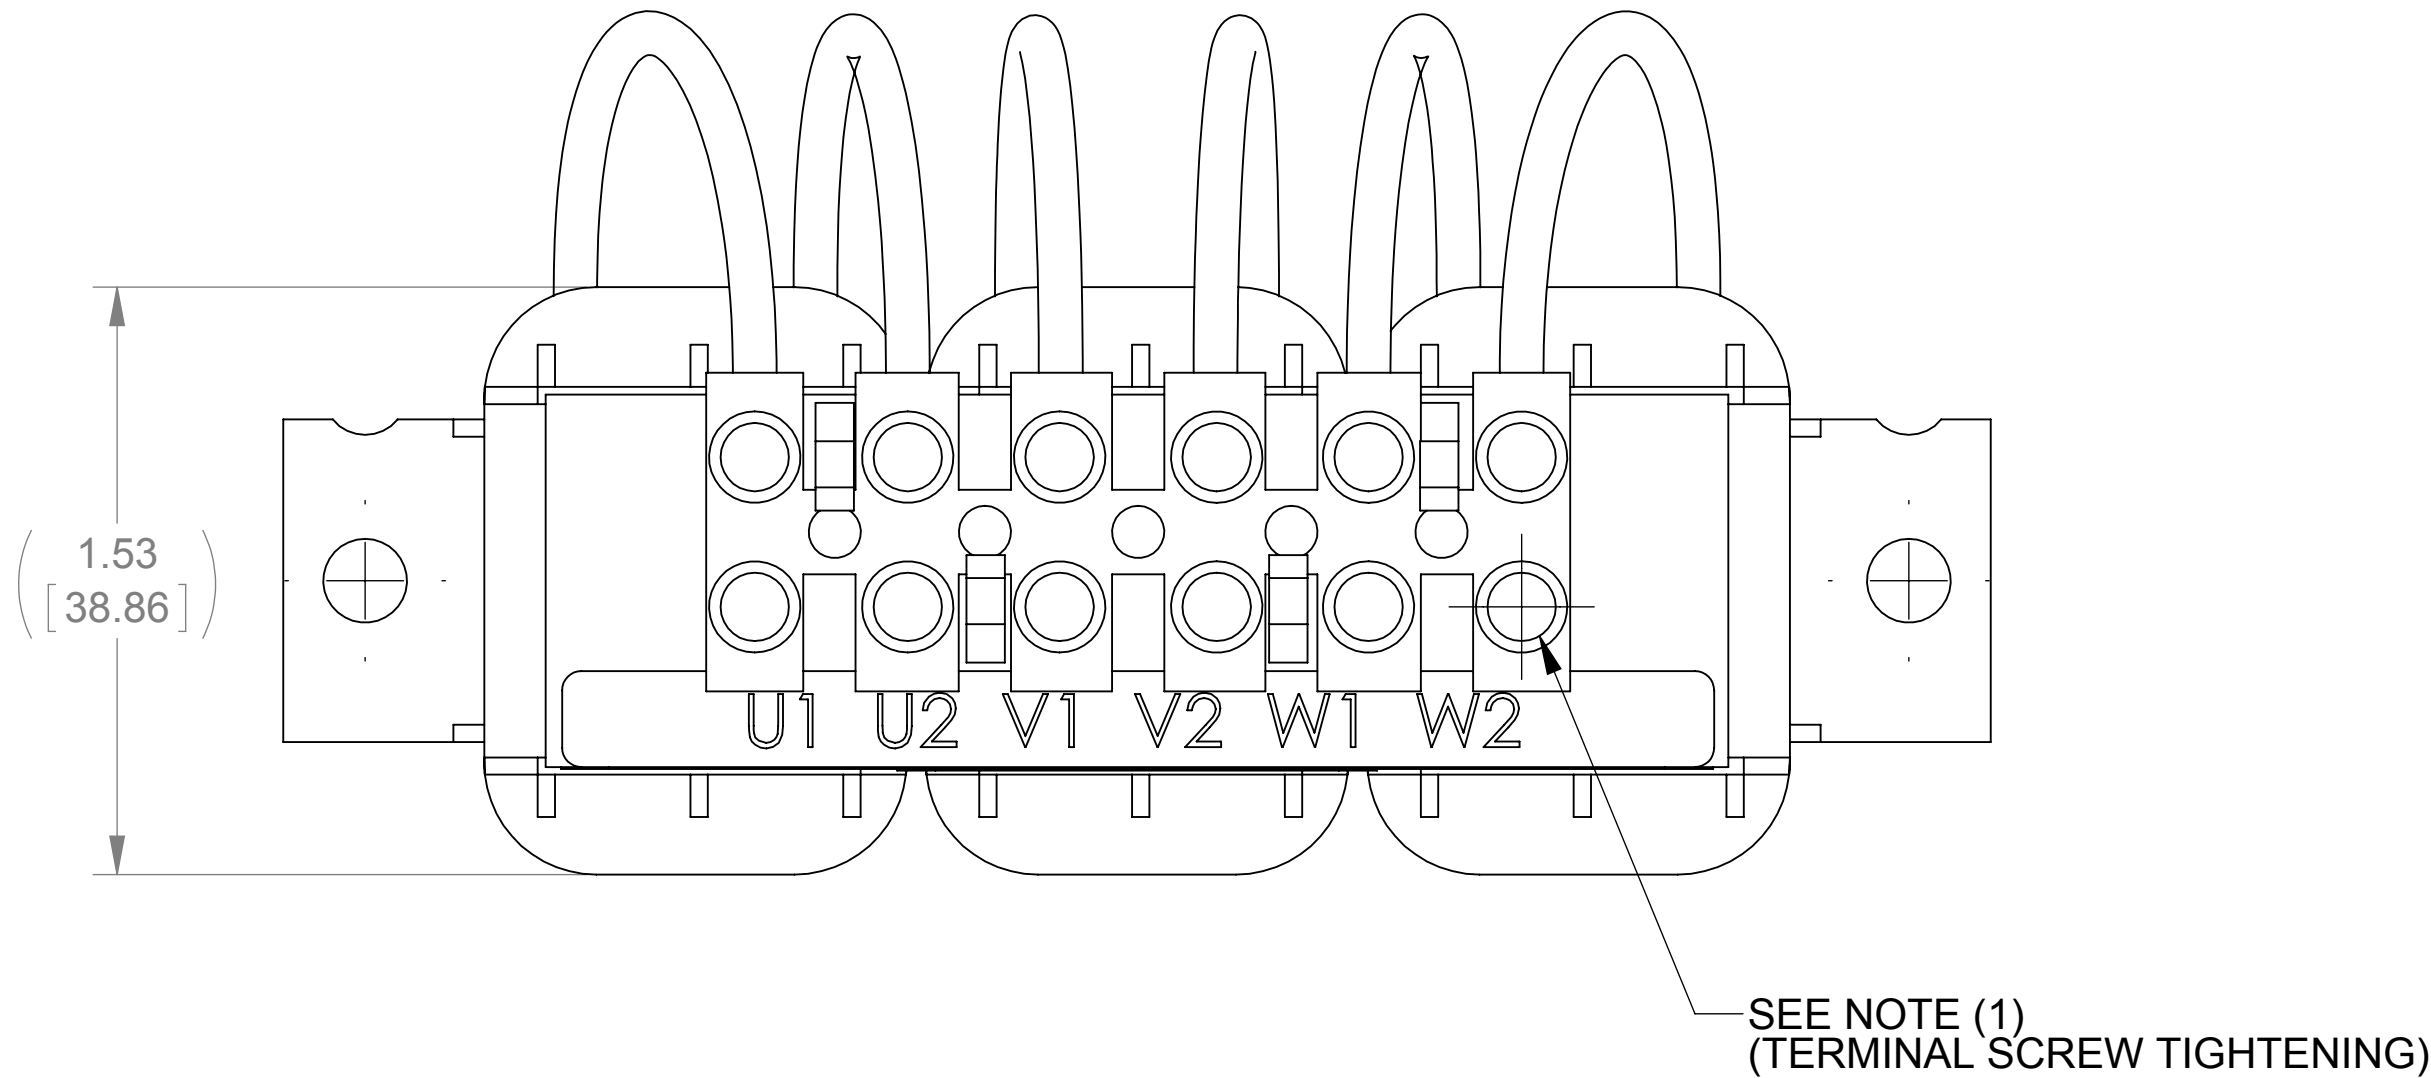


8	7	
WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
2	33mH	10.1

ECO No	DESCRIPTION	REV BY	DATE
M8128	REDRAW IN SOLIDWORKS	JP	08/07/12

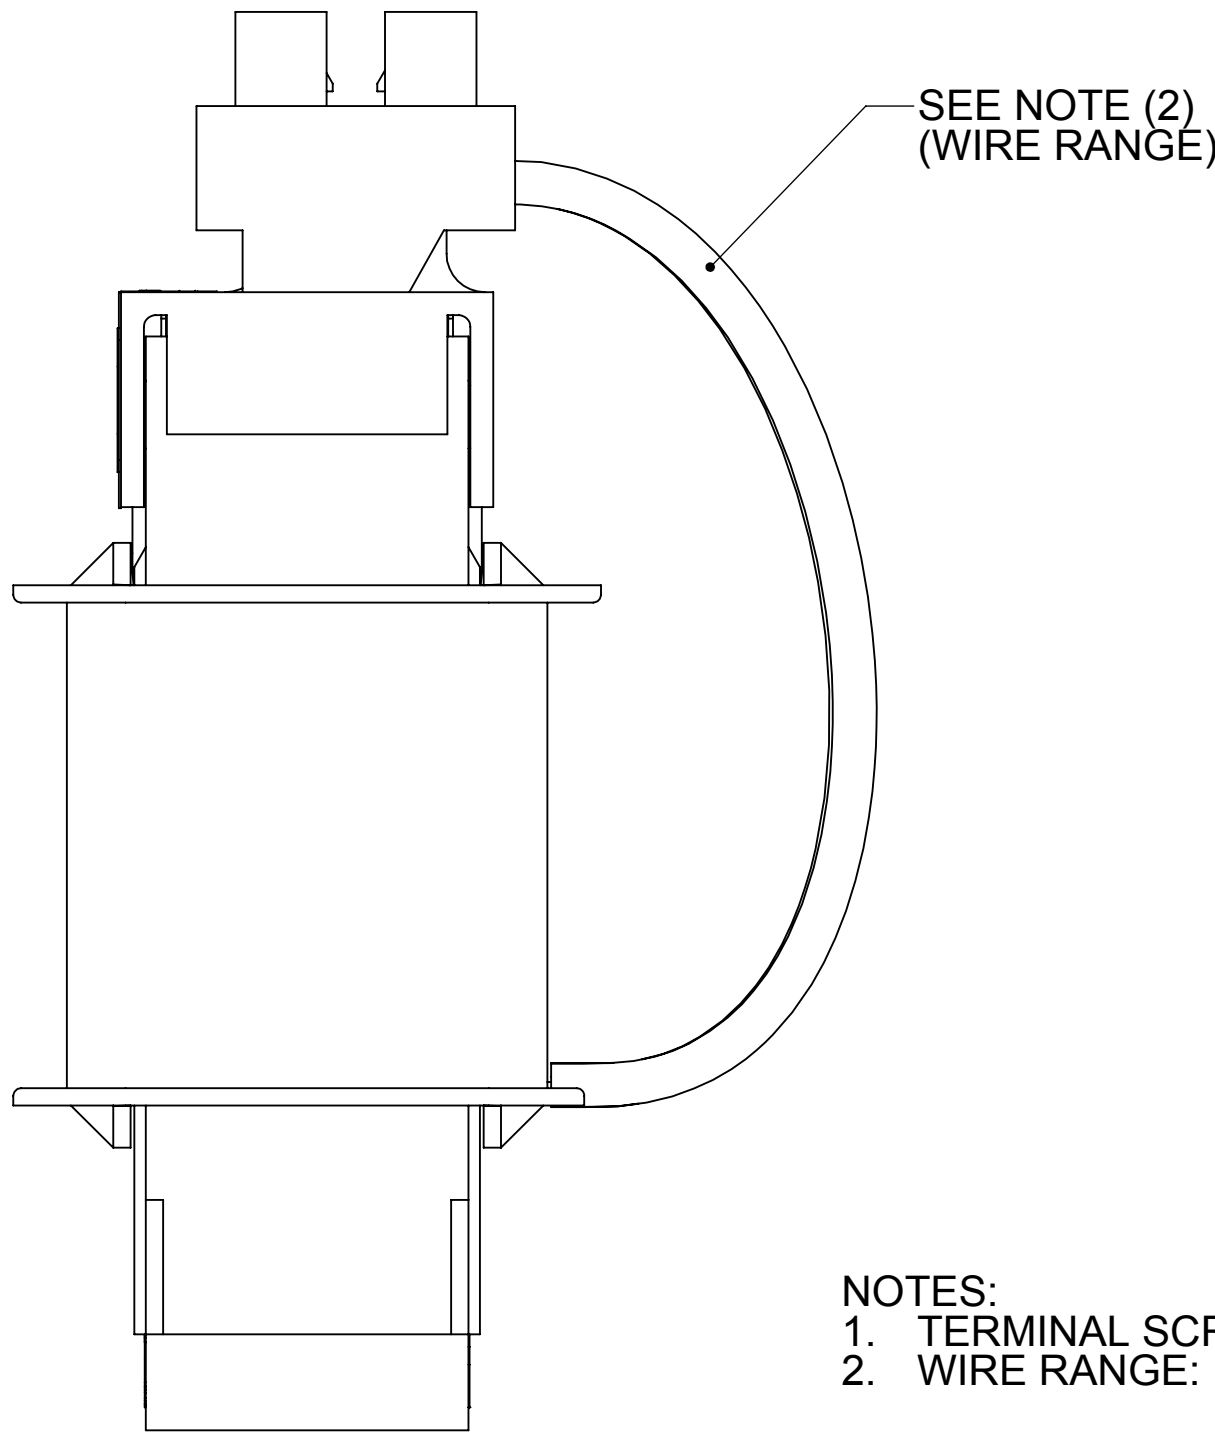

VIEW A-A

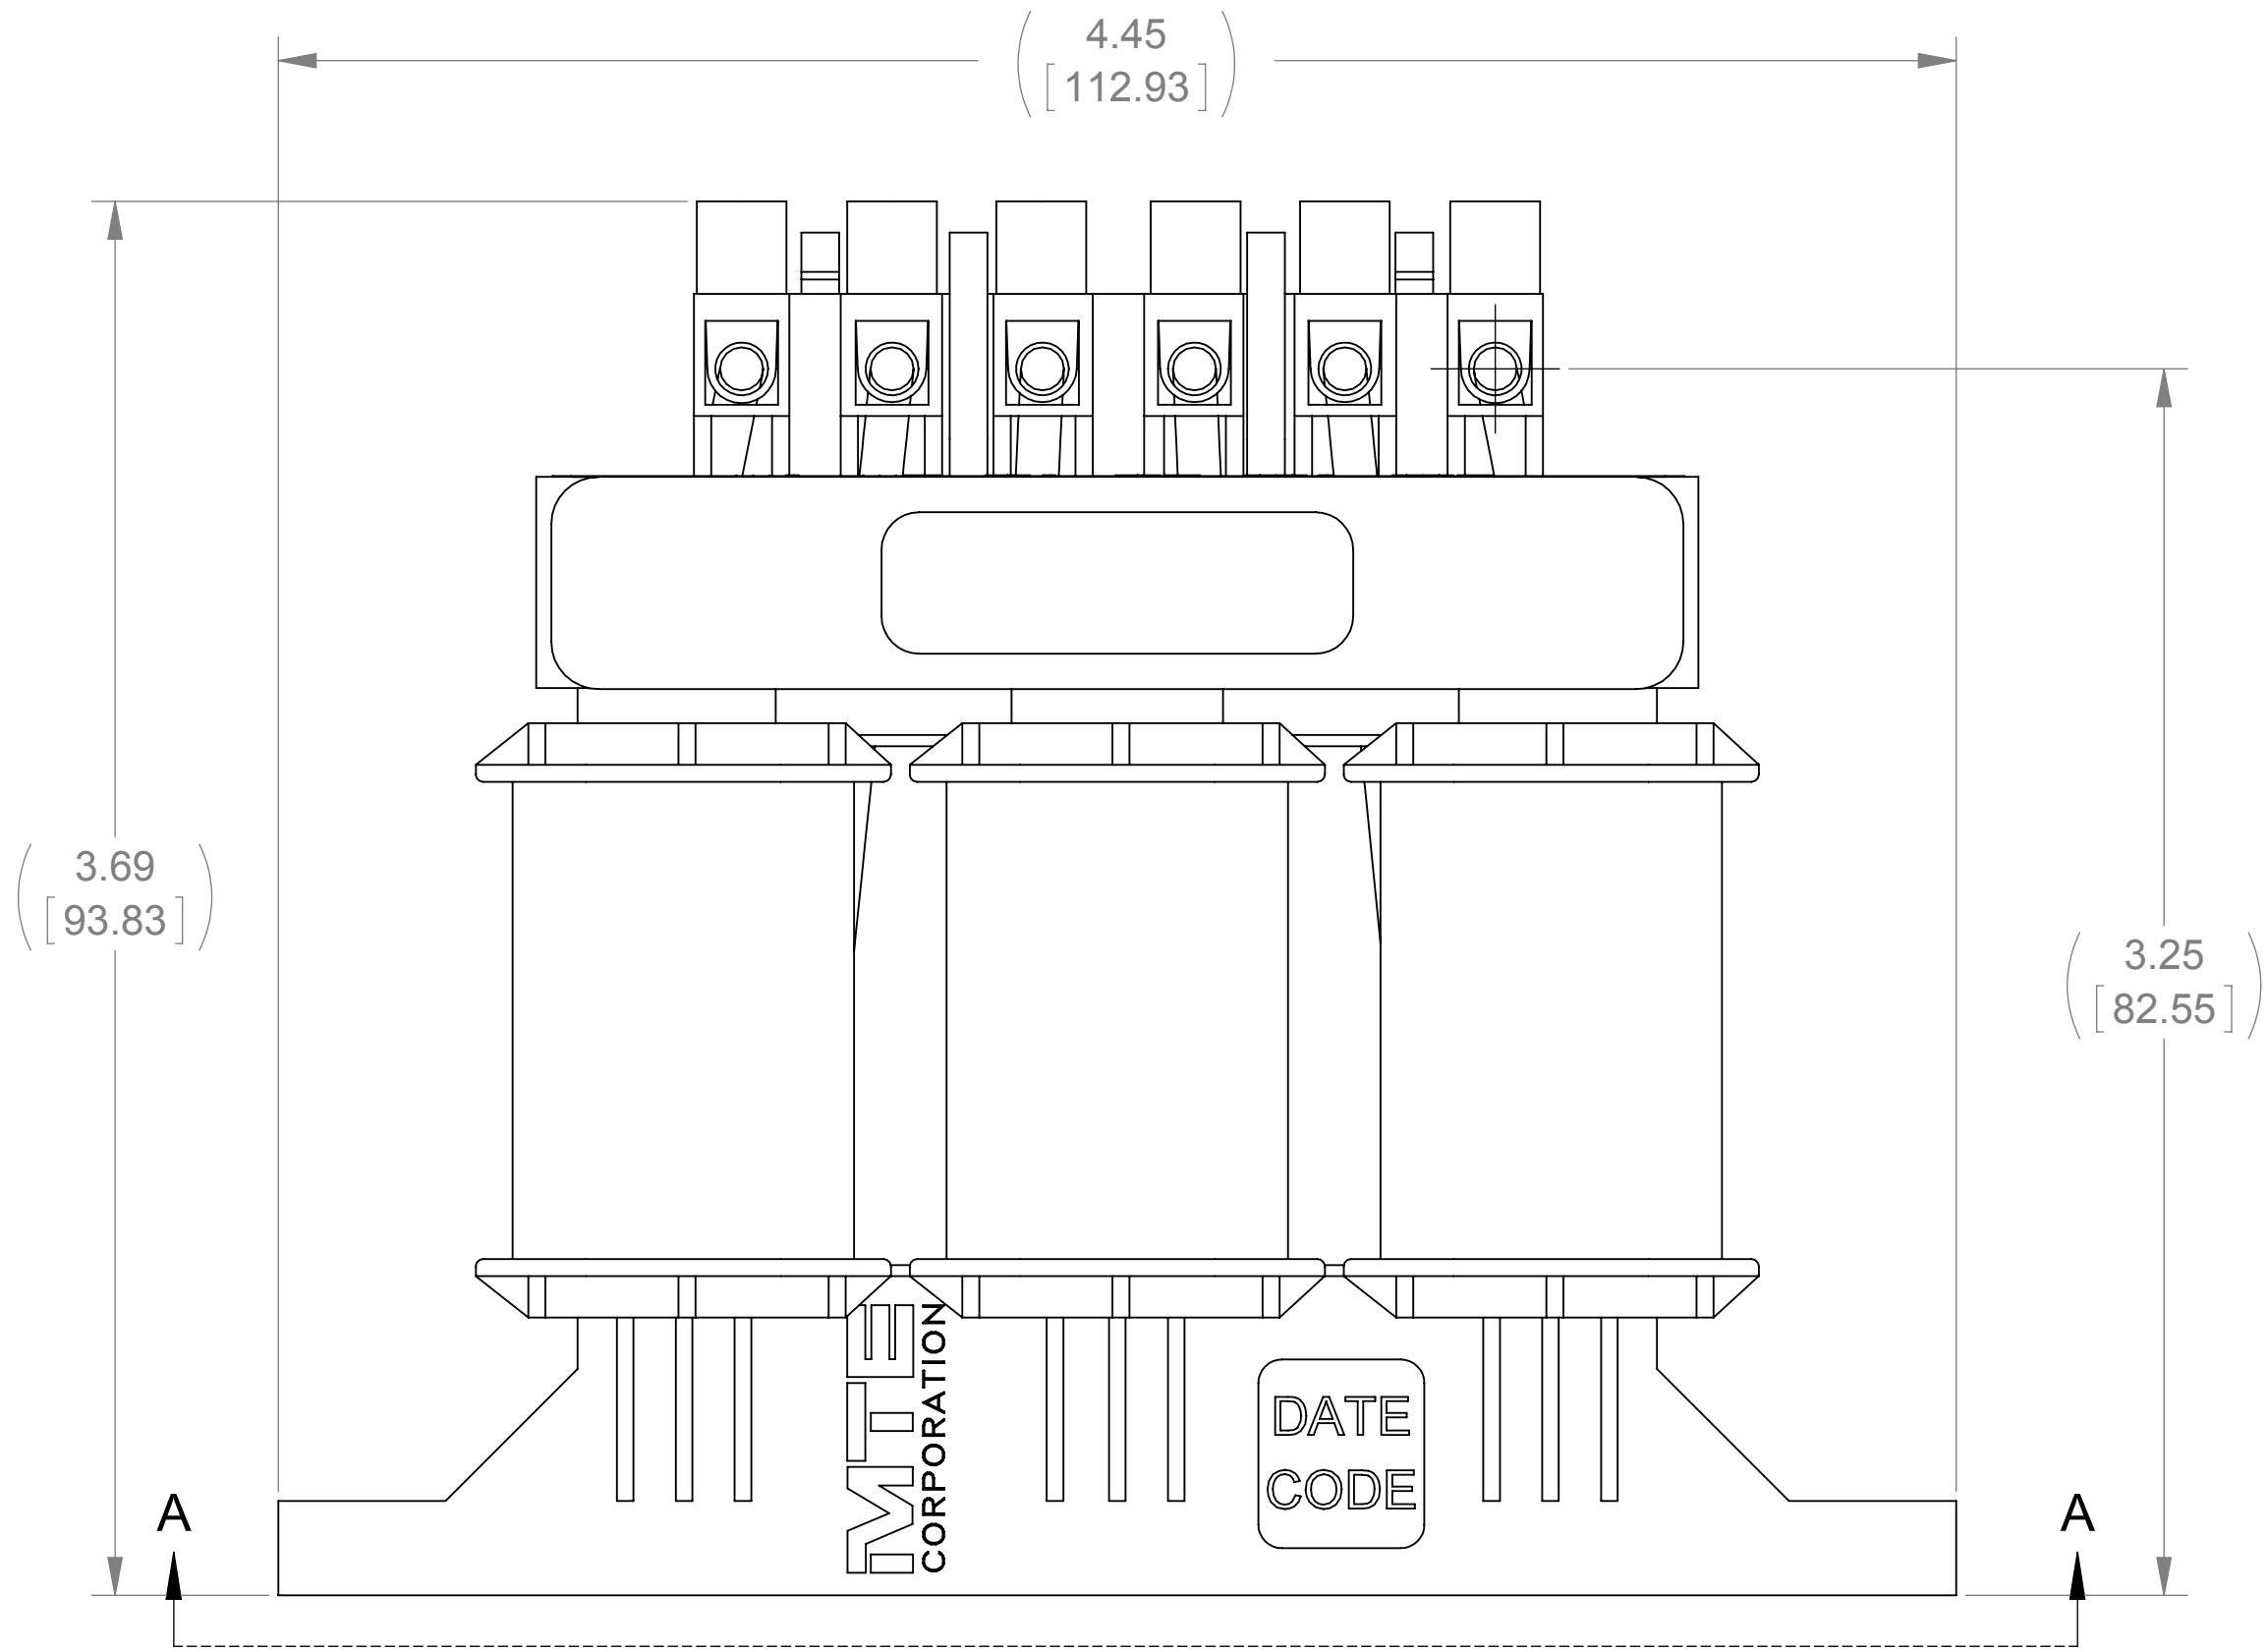

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE; 4.5 in-lb MAX.
2. WIRE RANGE: 22-10 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE AN MBL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200		SNAP CHANNEL REACTOR		
		DRAWN JP	DATE 07/31/12			
		CHECKED JH	DATE 08/07/12			
		APPROVED JH	DATE 08/07/12	SIZE D	DWG No. CD RLW-01P105	REV 04
		SCALE 2:1				SHEET 1 OF 1