
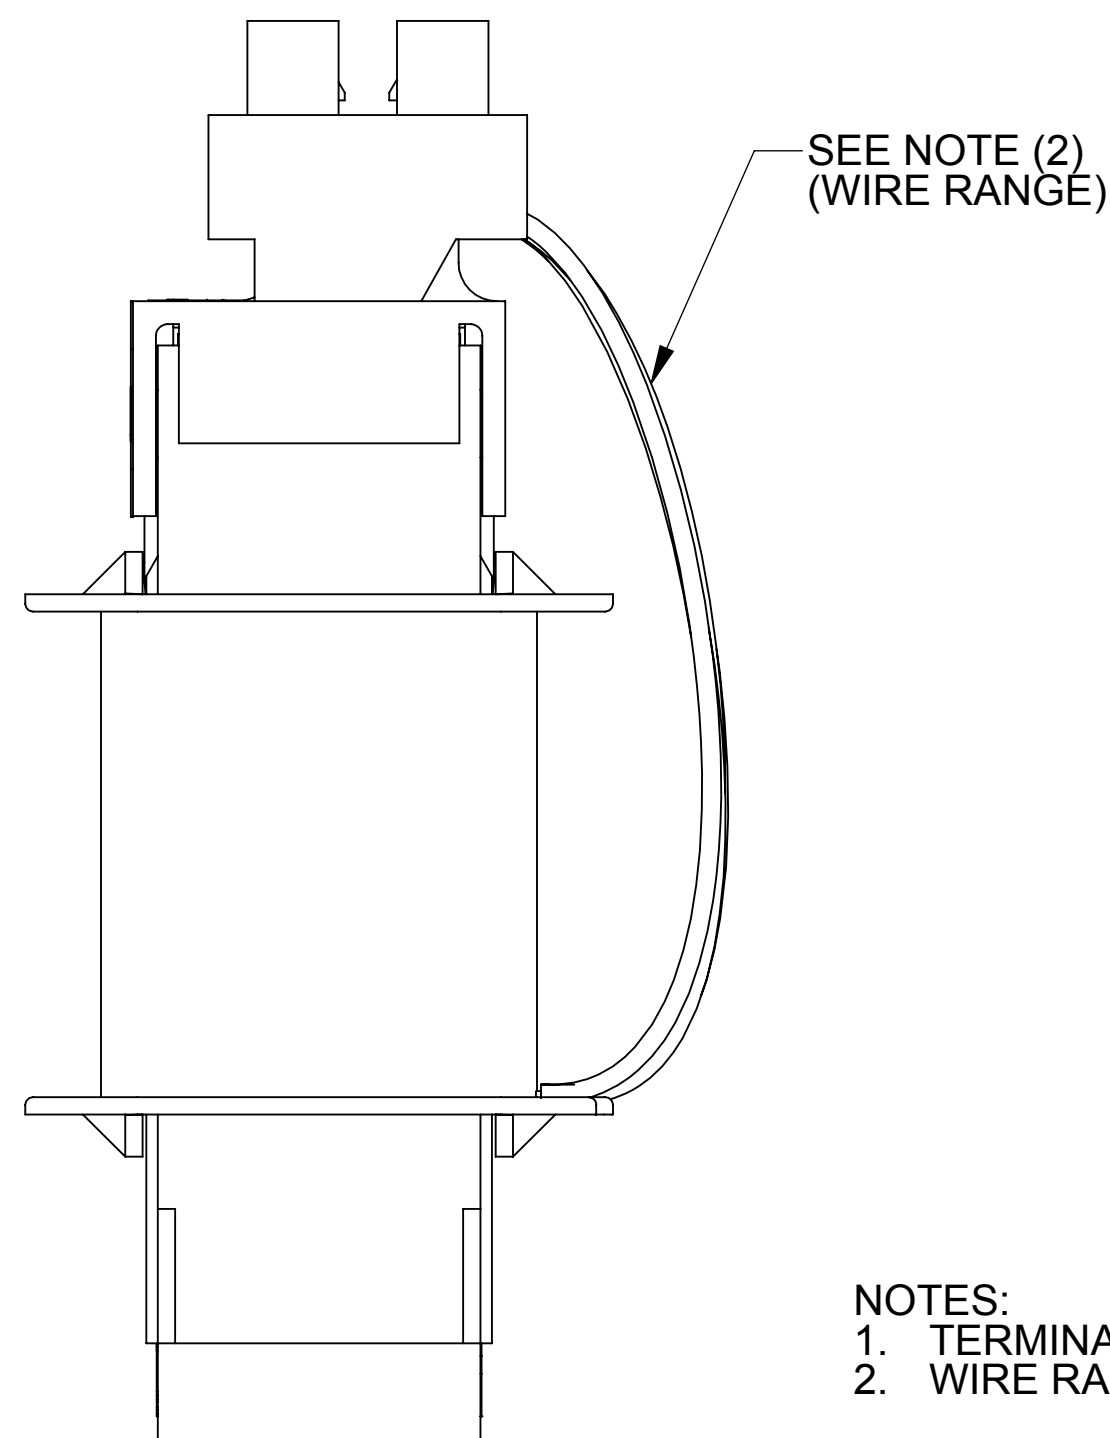
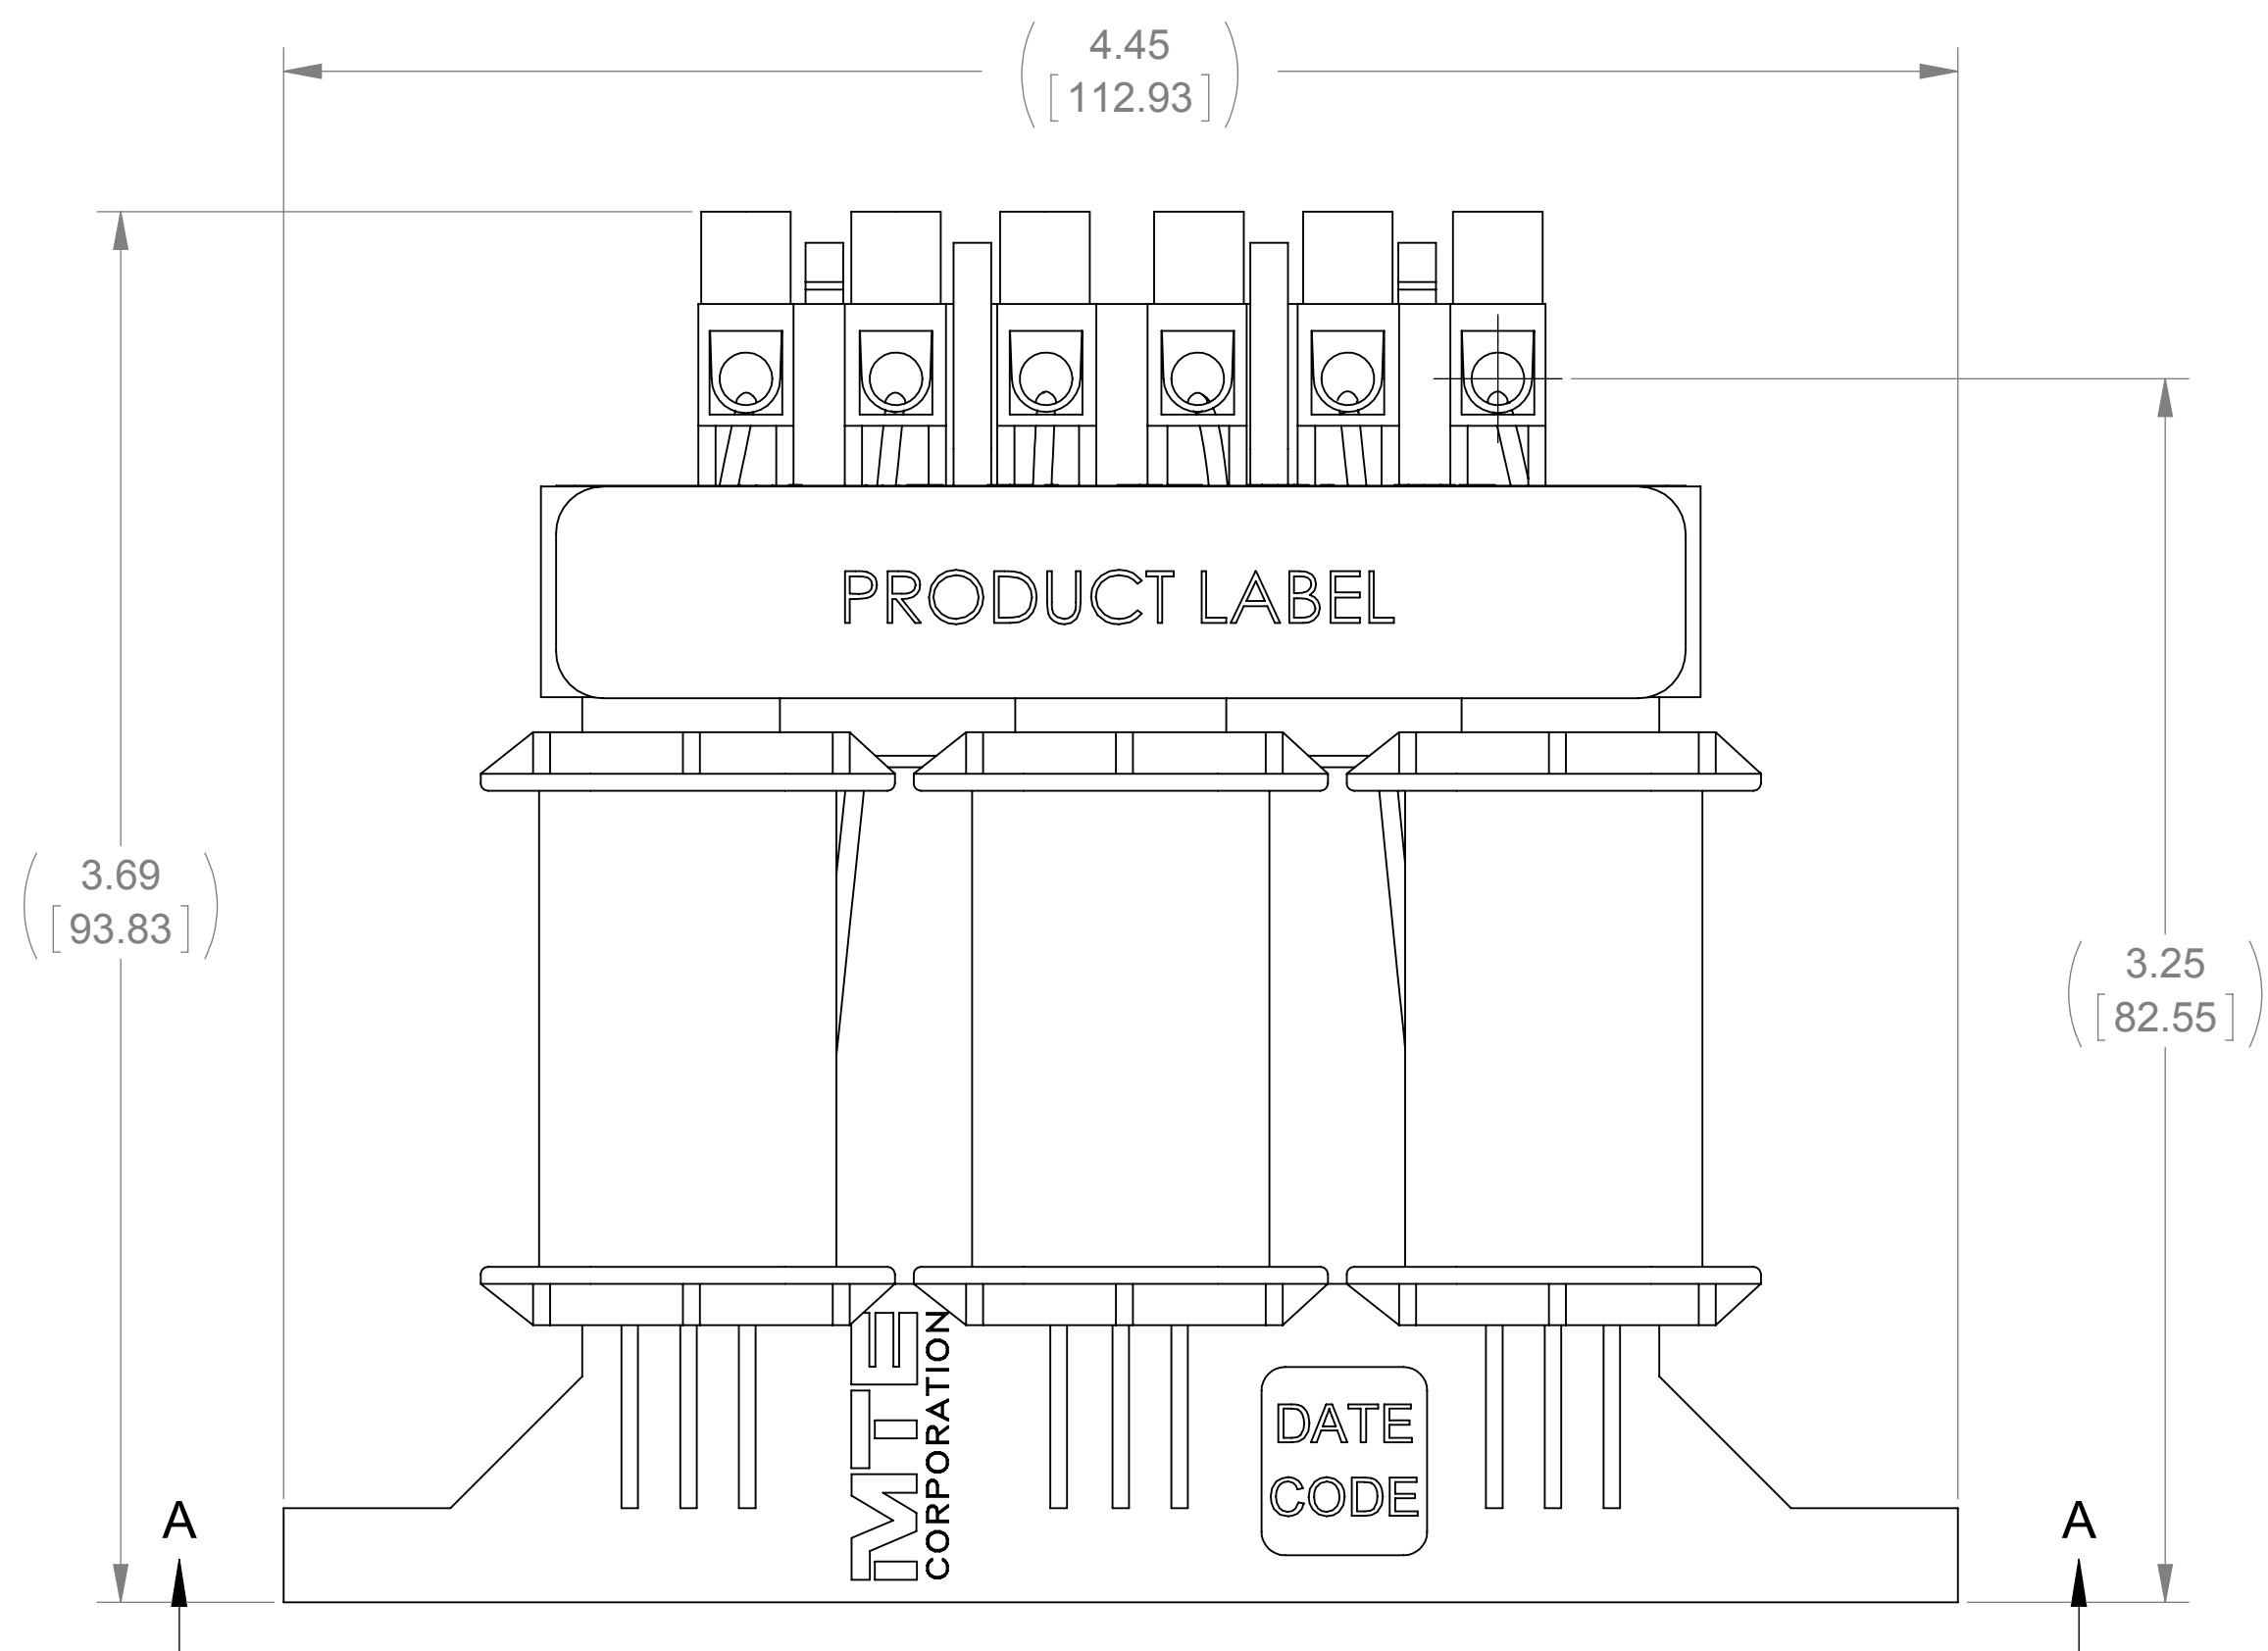
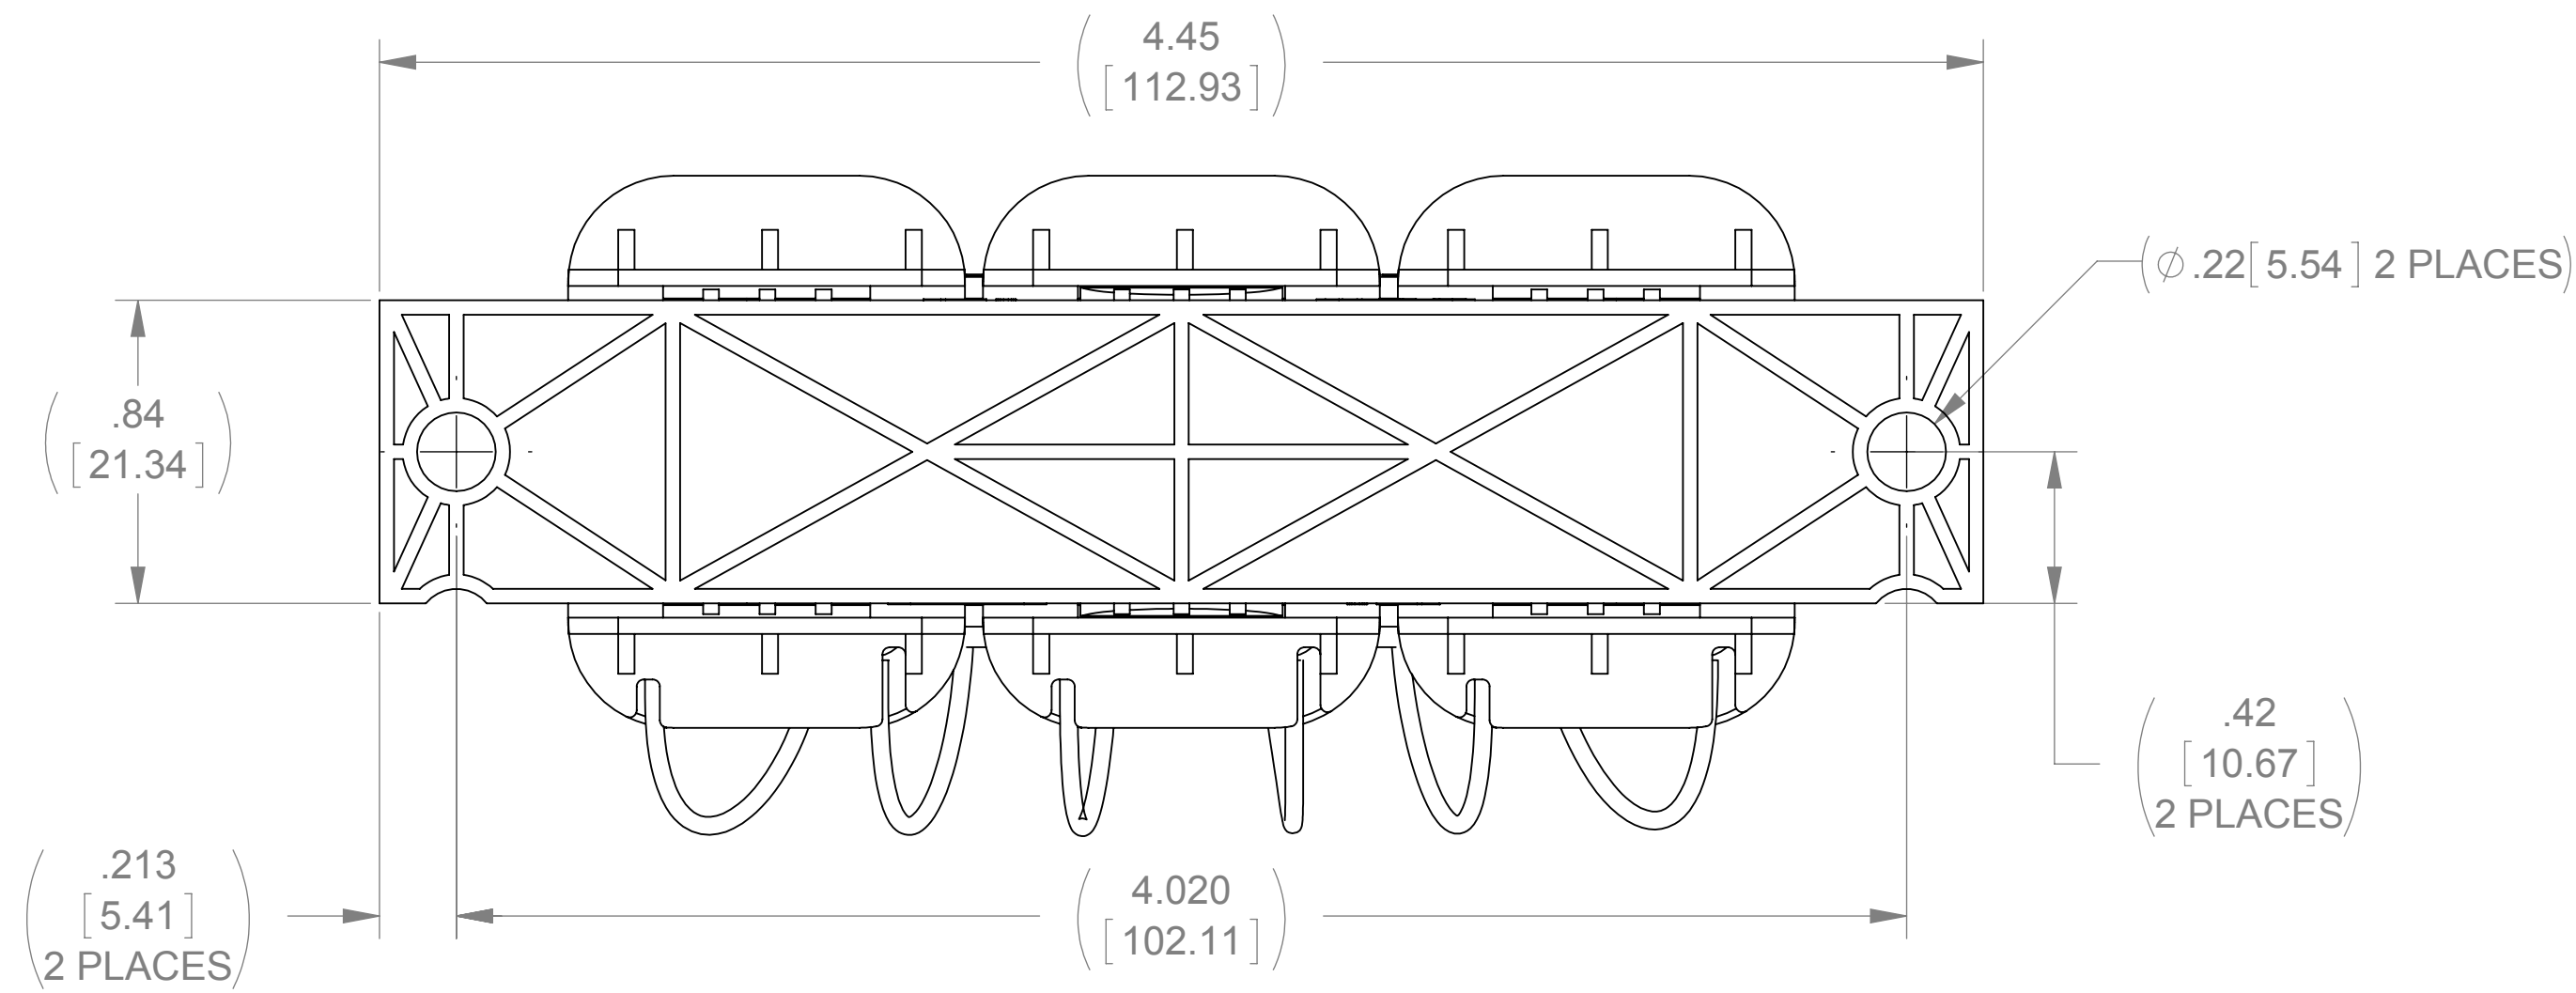


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
2	29mH	17.7

ECO No	DESCRIPTION	REV BY	DATE
M8128	REDRAW IN SOLIDWORKS	JP	08/07/12

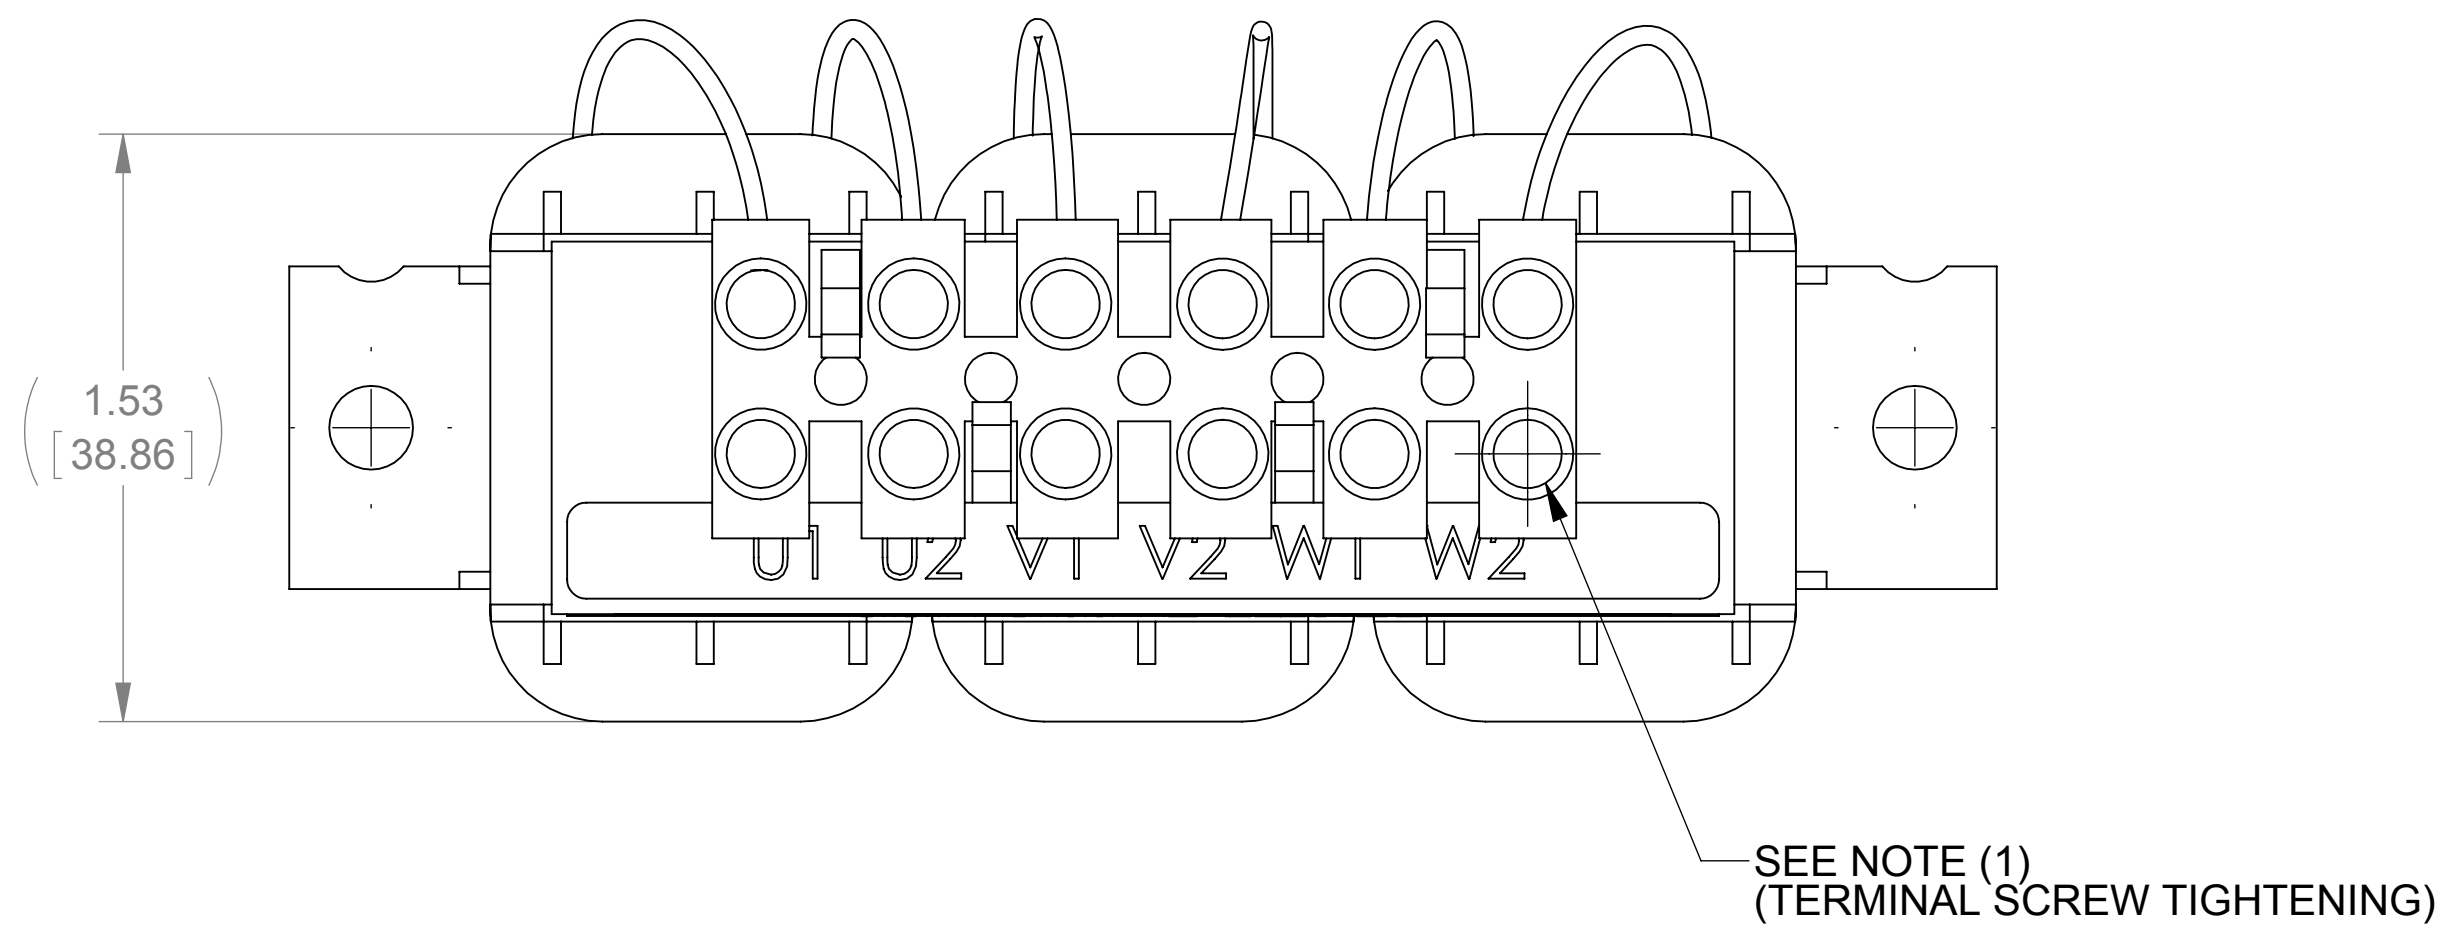

NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE; 4.5 in-lb MAX.
2. WIRE RANGE: 22-10 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION							
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION							
<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:</div> <div>ANGLES: ± 1 °</div> <div>1 PLACE .X: ± .1 [2.5]</div> <div>2 PLACE .XX: ± .03 [0.76]</div> <div>3 PLACE .XXX: ± .010 [0.254]</div> <div><div><div>MTE</div><div>AN BL POWER ELECTRONICS COMPANY</div></div><div>N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200</div></div>		DRAWN		DATE		SNAP CHANNEL REACTOR					
		JP		07/31/12							
		CHECKED		DATE							
		JH		08/07/12							
		APPROVED		DATE		SIZE		DWG No.		REV	
		JH		08/07/12		D		CD RLW-01P606		04	
						SCALE 2:1				SHEET 1 OF 1	