

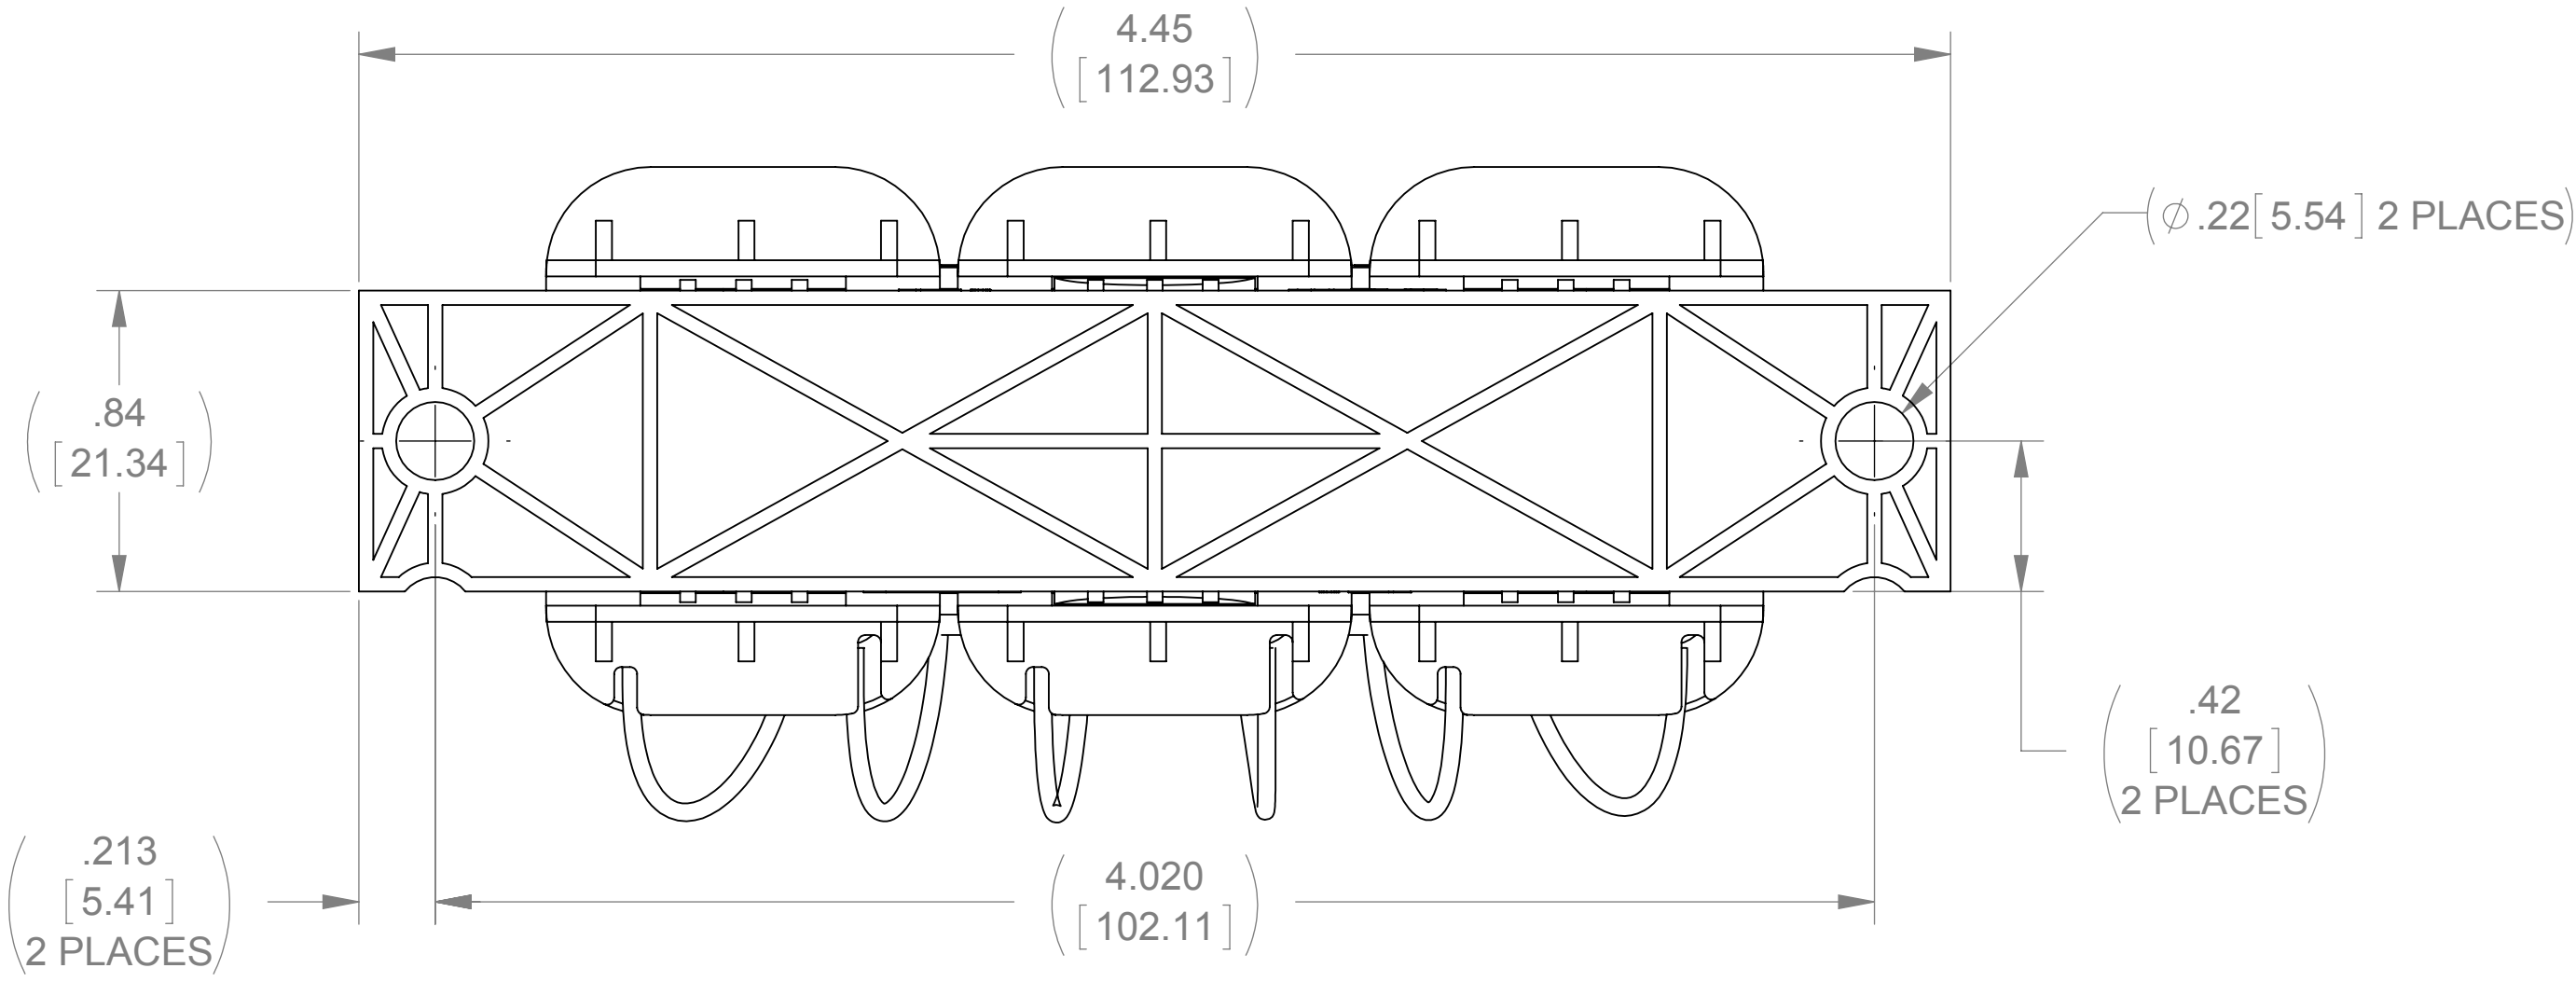
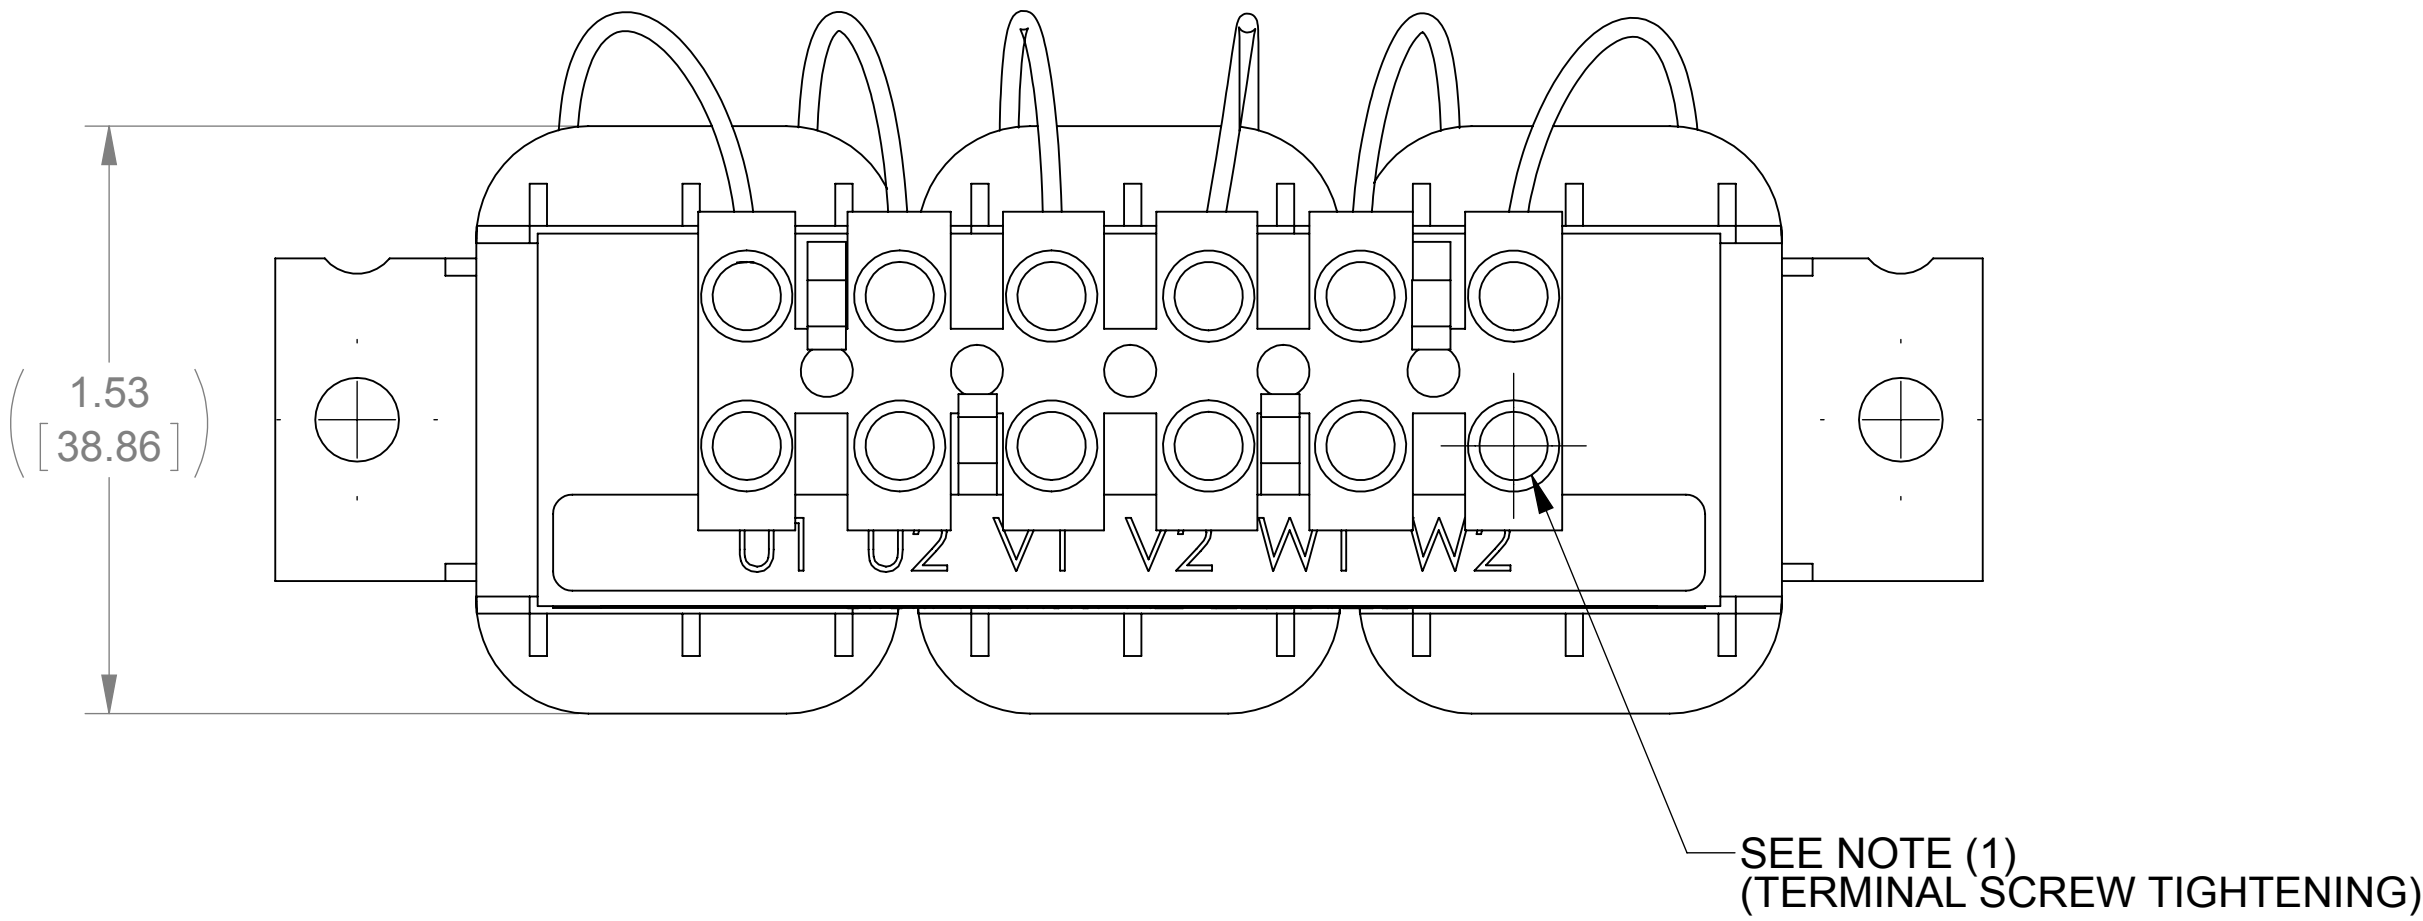


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
2	3.2mH	12.3

ECO No	DESCRIPTION	REV BY	DATE
M8128	REDRAW IN SOLIDWORKS	JP	08/07/12

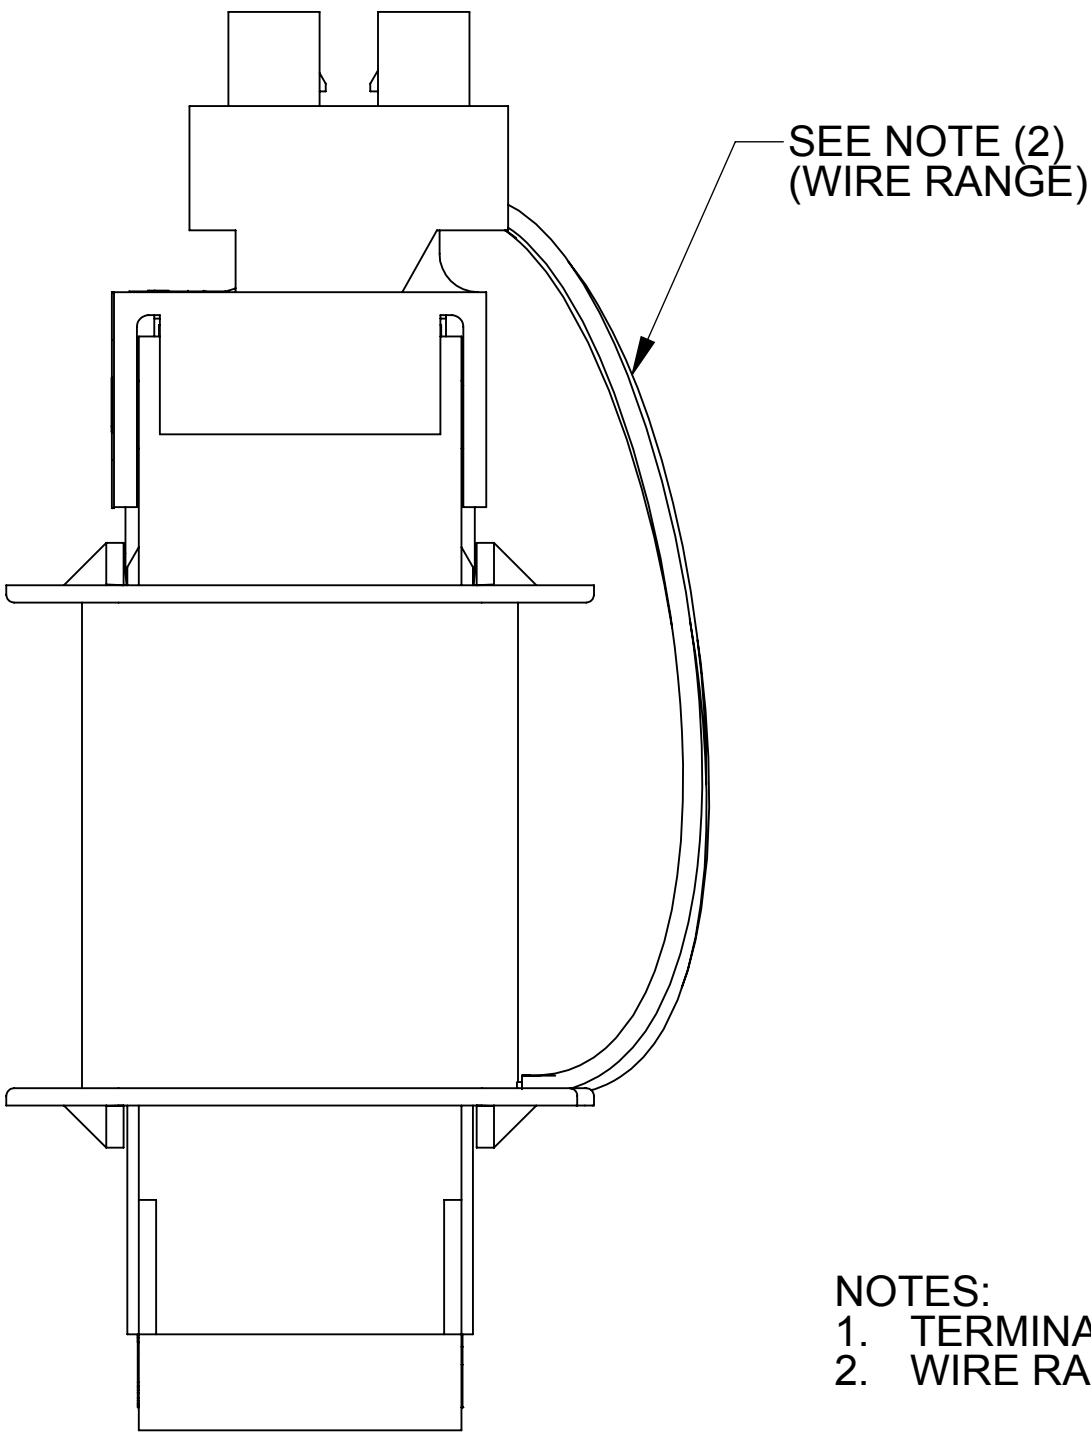

VIEW A-A

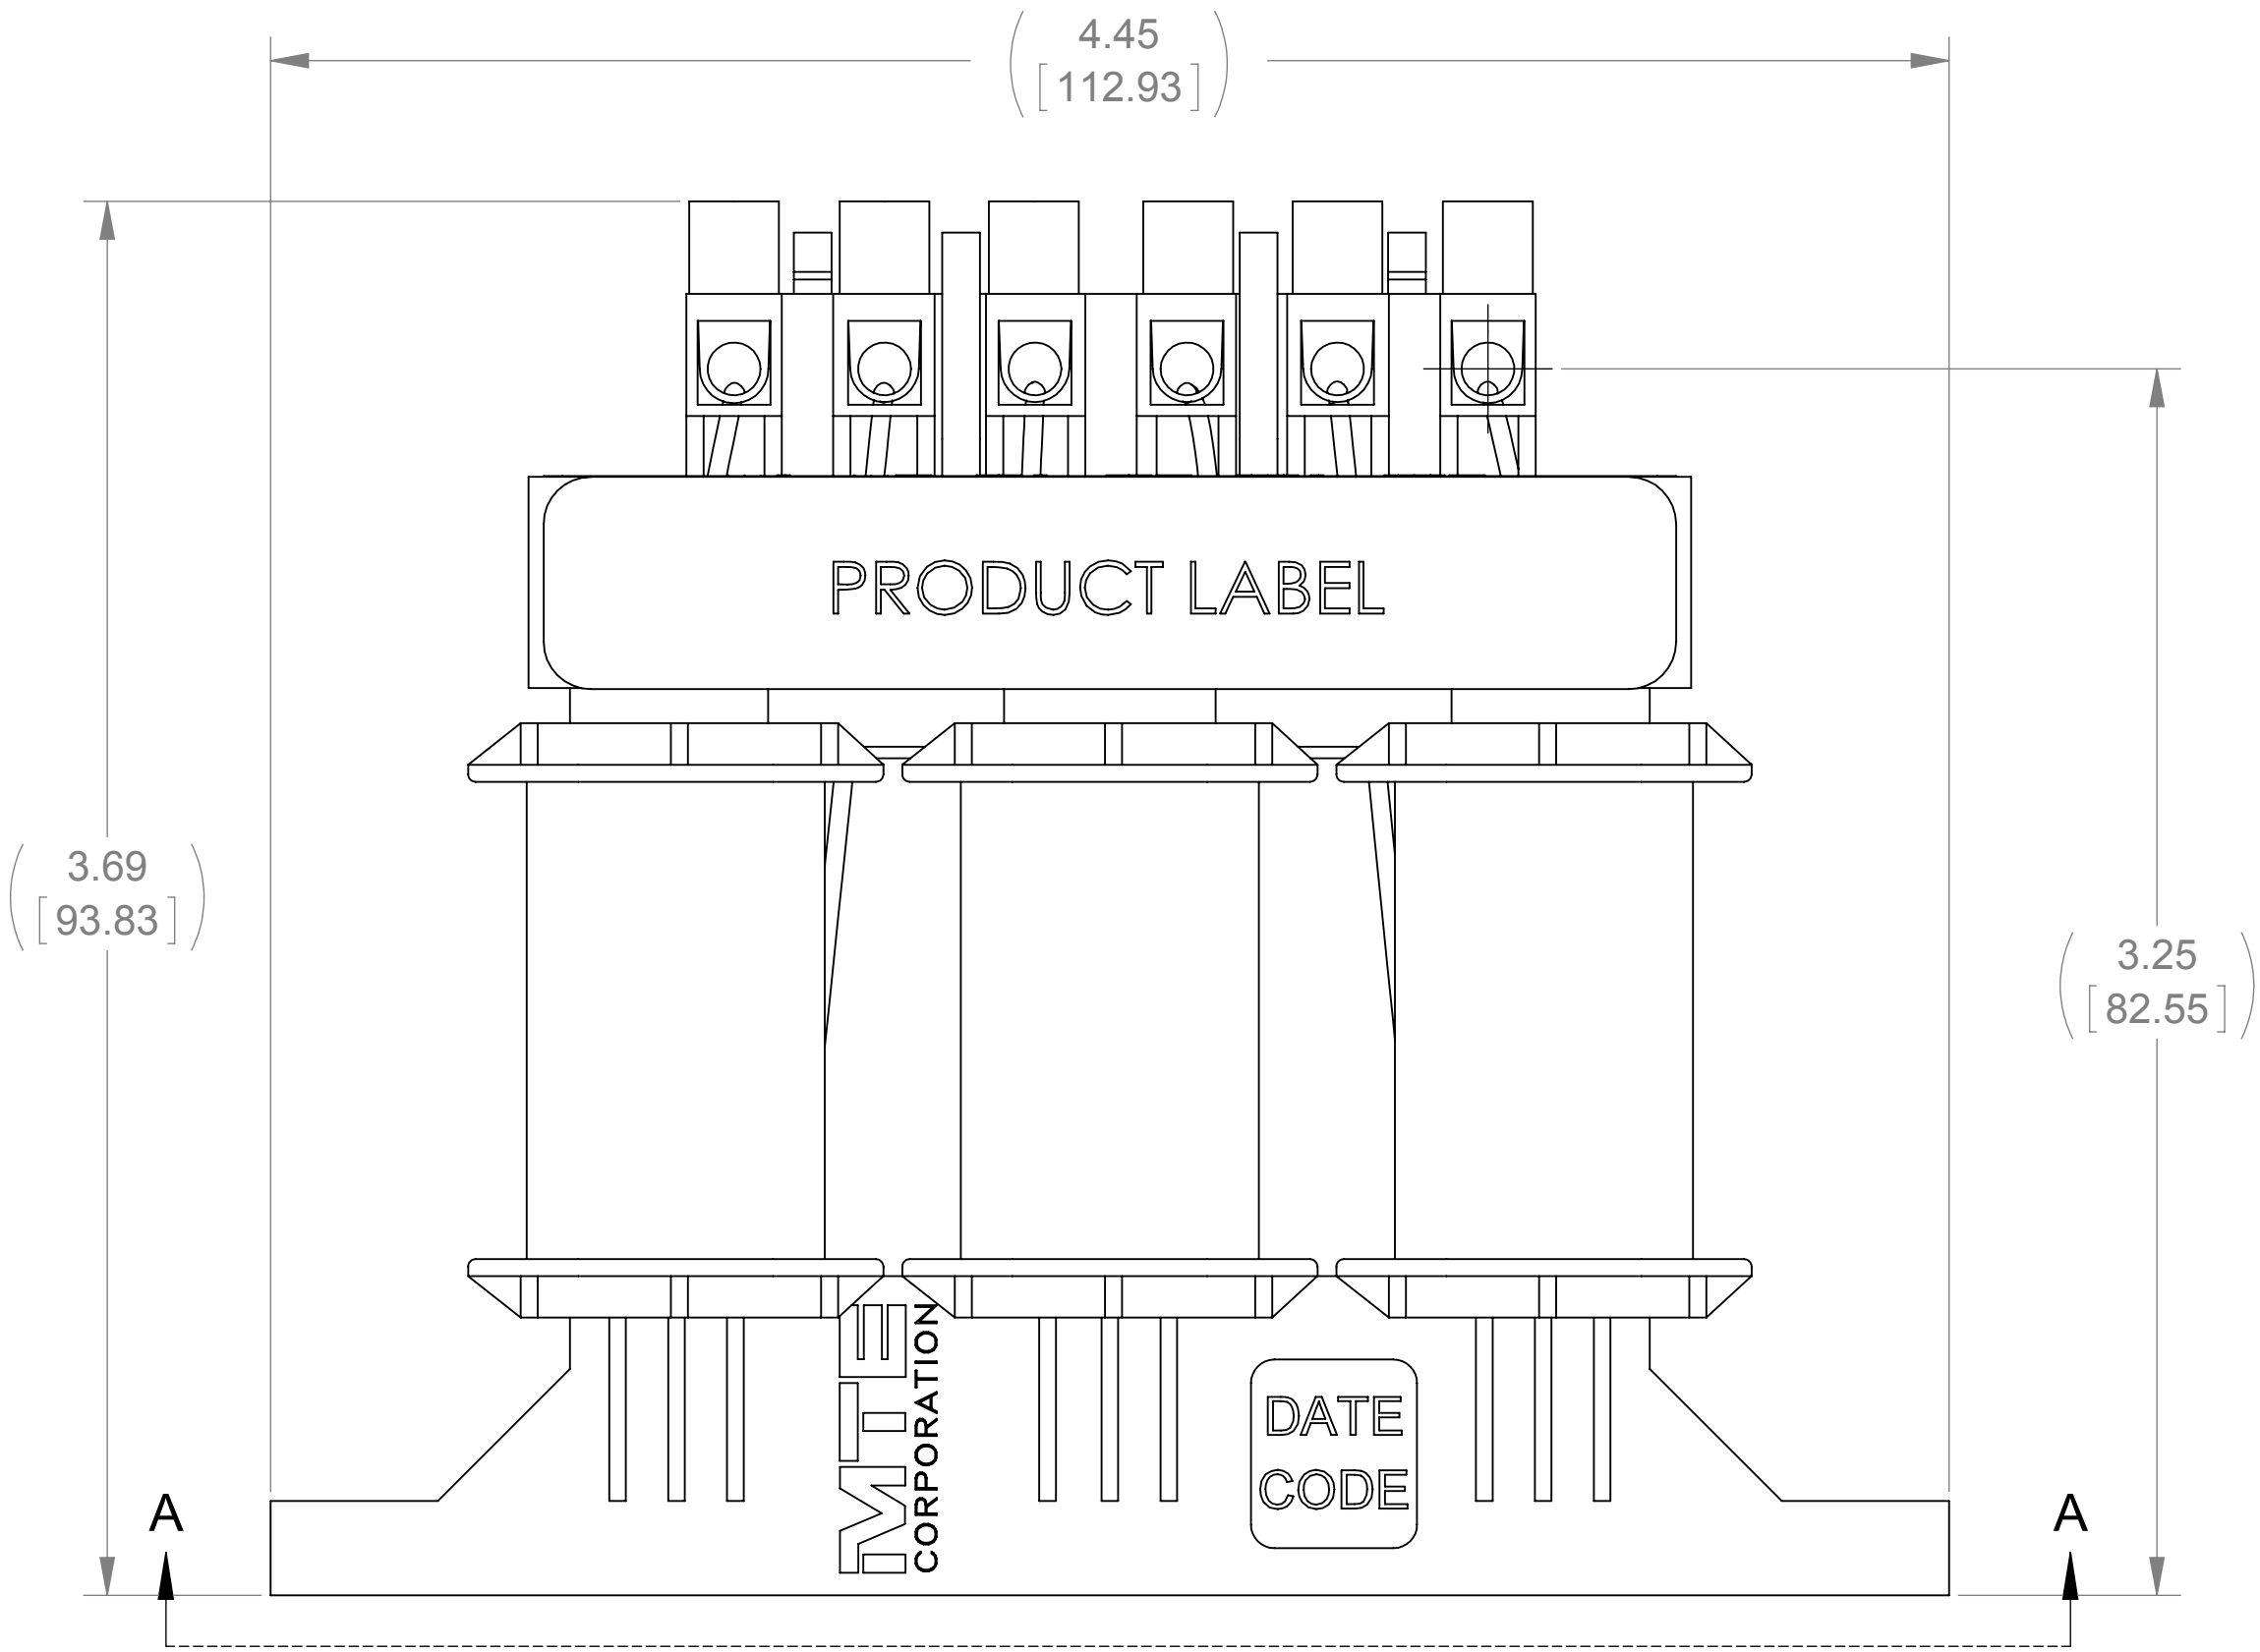

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE; 4.5 in-lb MAX.
2. WIRE RANGE: 22-10 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS			MATERIAL			CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION						DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: $\pm 1^\circ$ 1 PLACE .X: $\pm .1$ [2.5] 2 PLACE .XX: $\pm .03$ [0.76] 3 PLACE .XXX: $\pm .010$ [0.254]			MTE AN BL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200			SNAP CHANNEL REACTOR		
DRAWN JP		DATE 07/31/12	CHECKED JH		DATE 08/07/12	SIZE D	DWG No. CD RLW-03P401	REV 04
APPROVED JH		DATE 08/07/12	SCALE 2:1		SHEET 1 OF 1			