
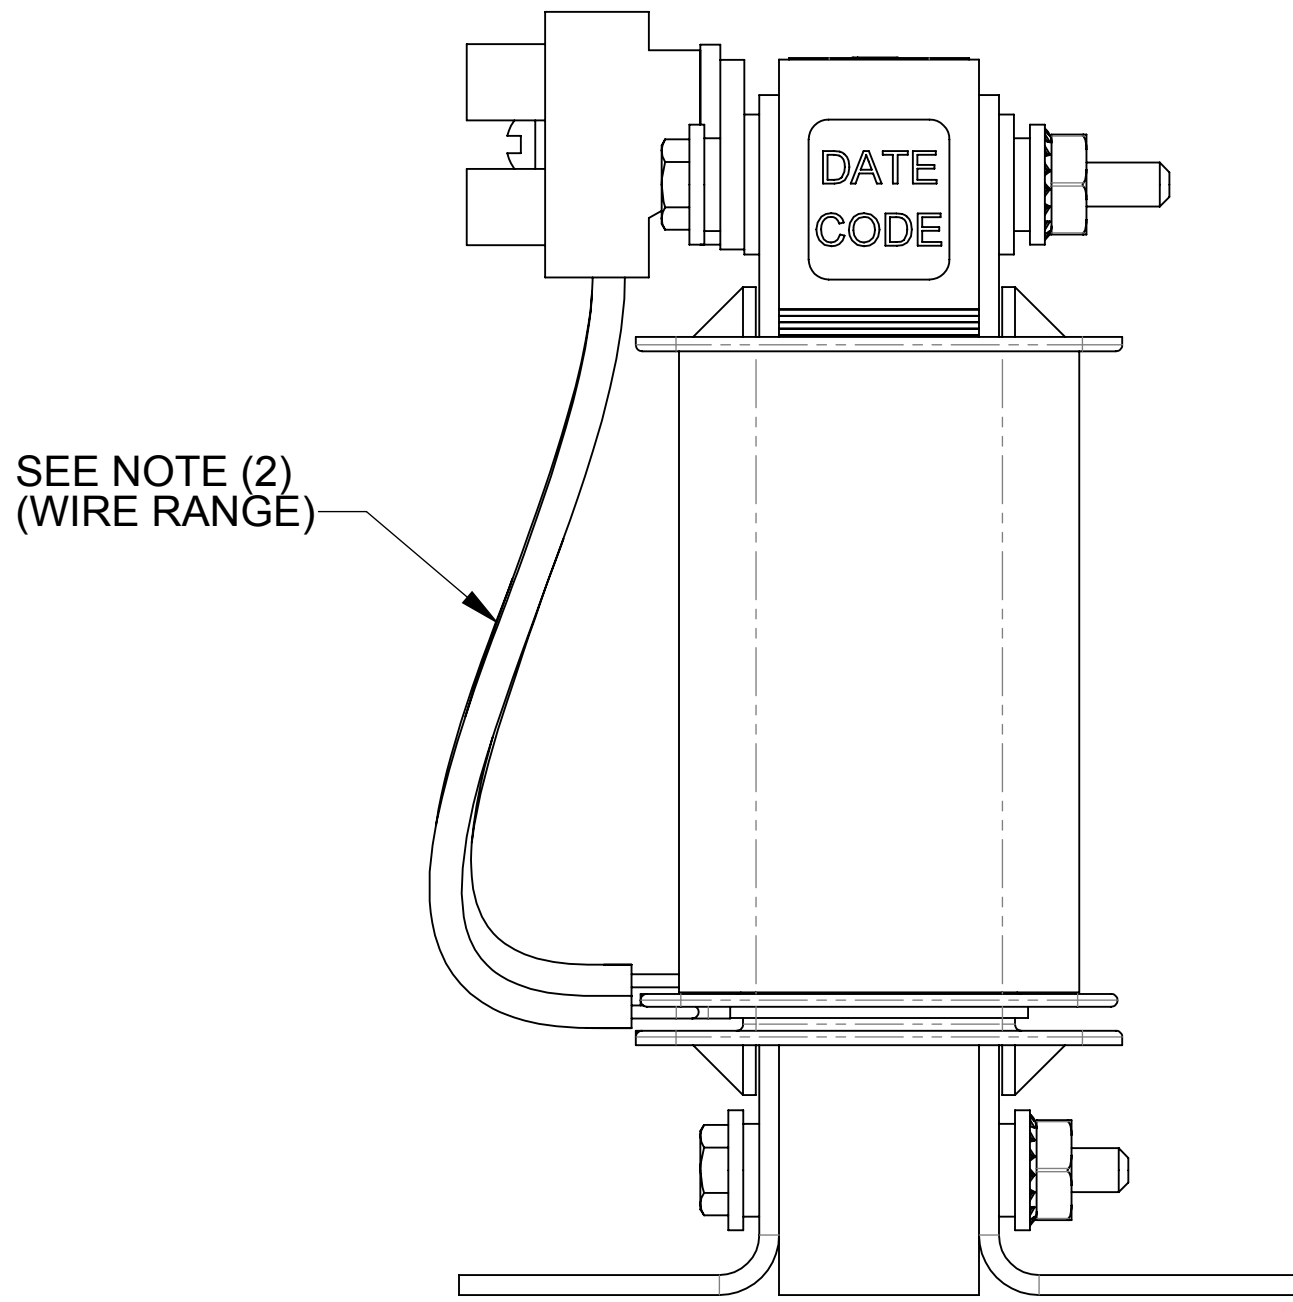
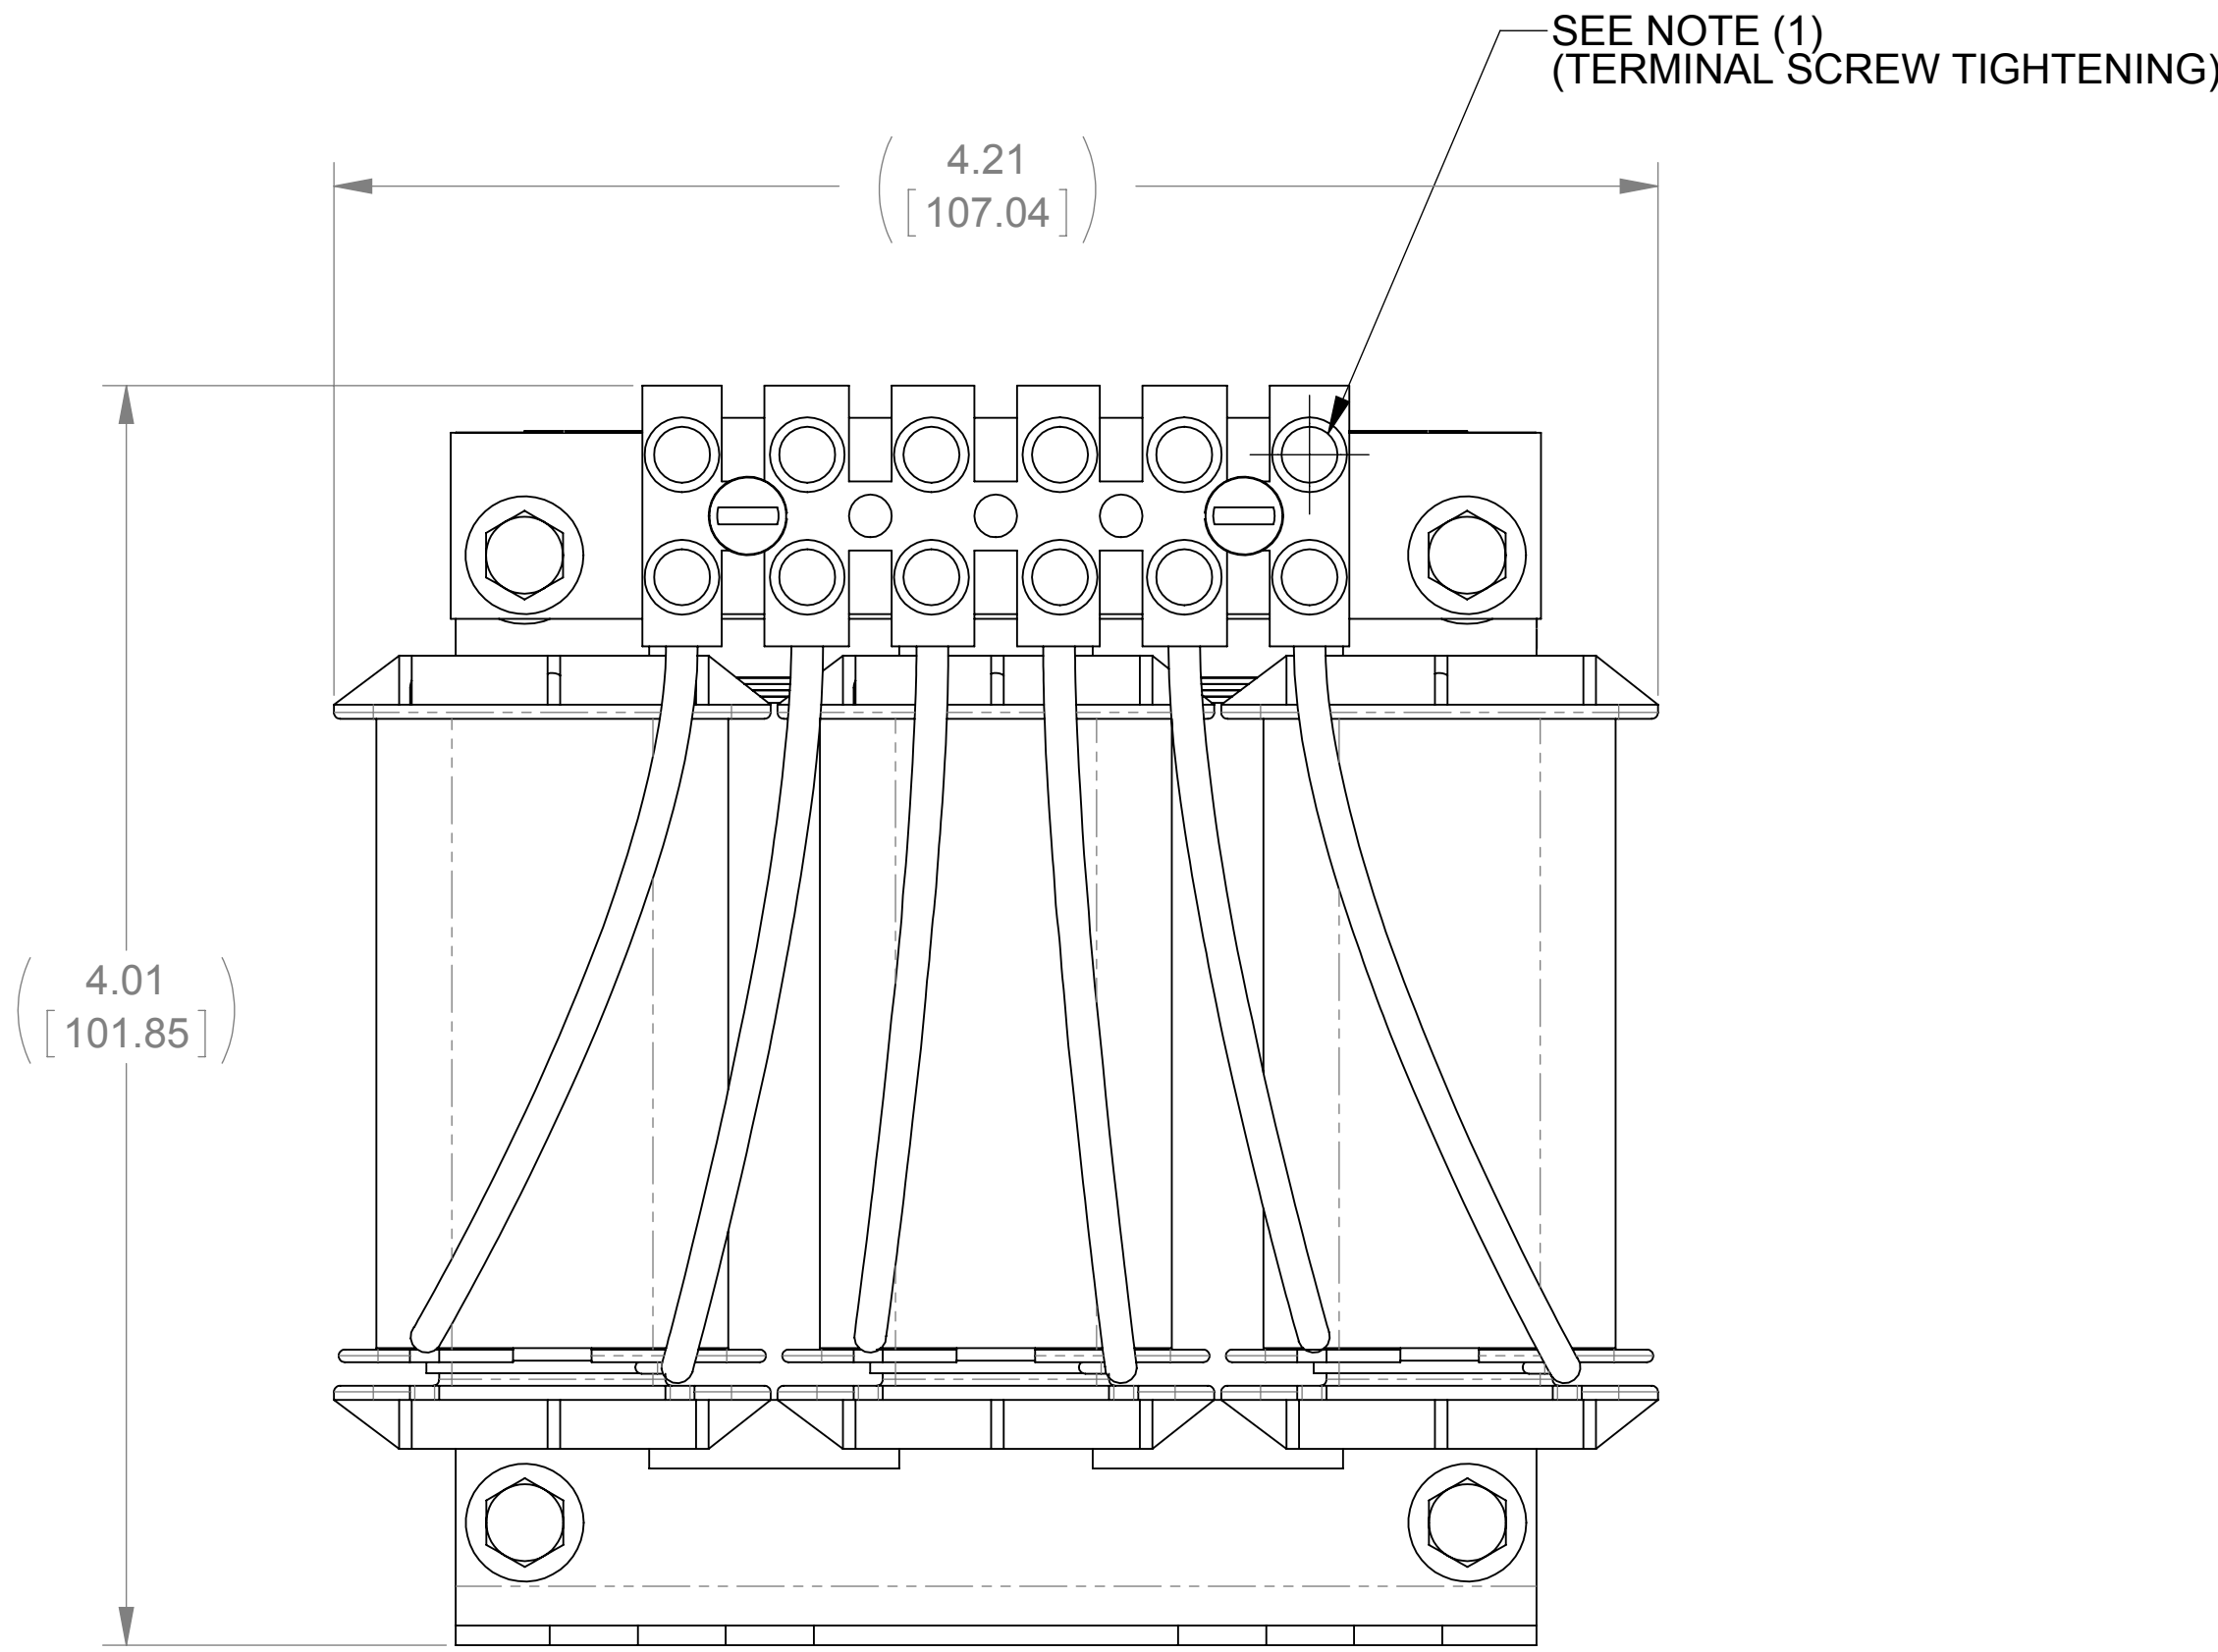
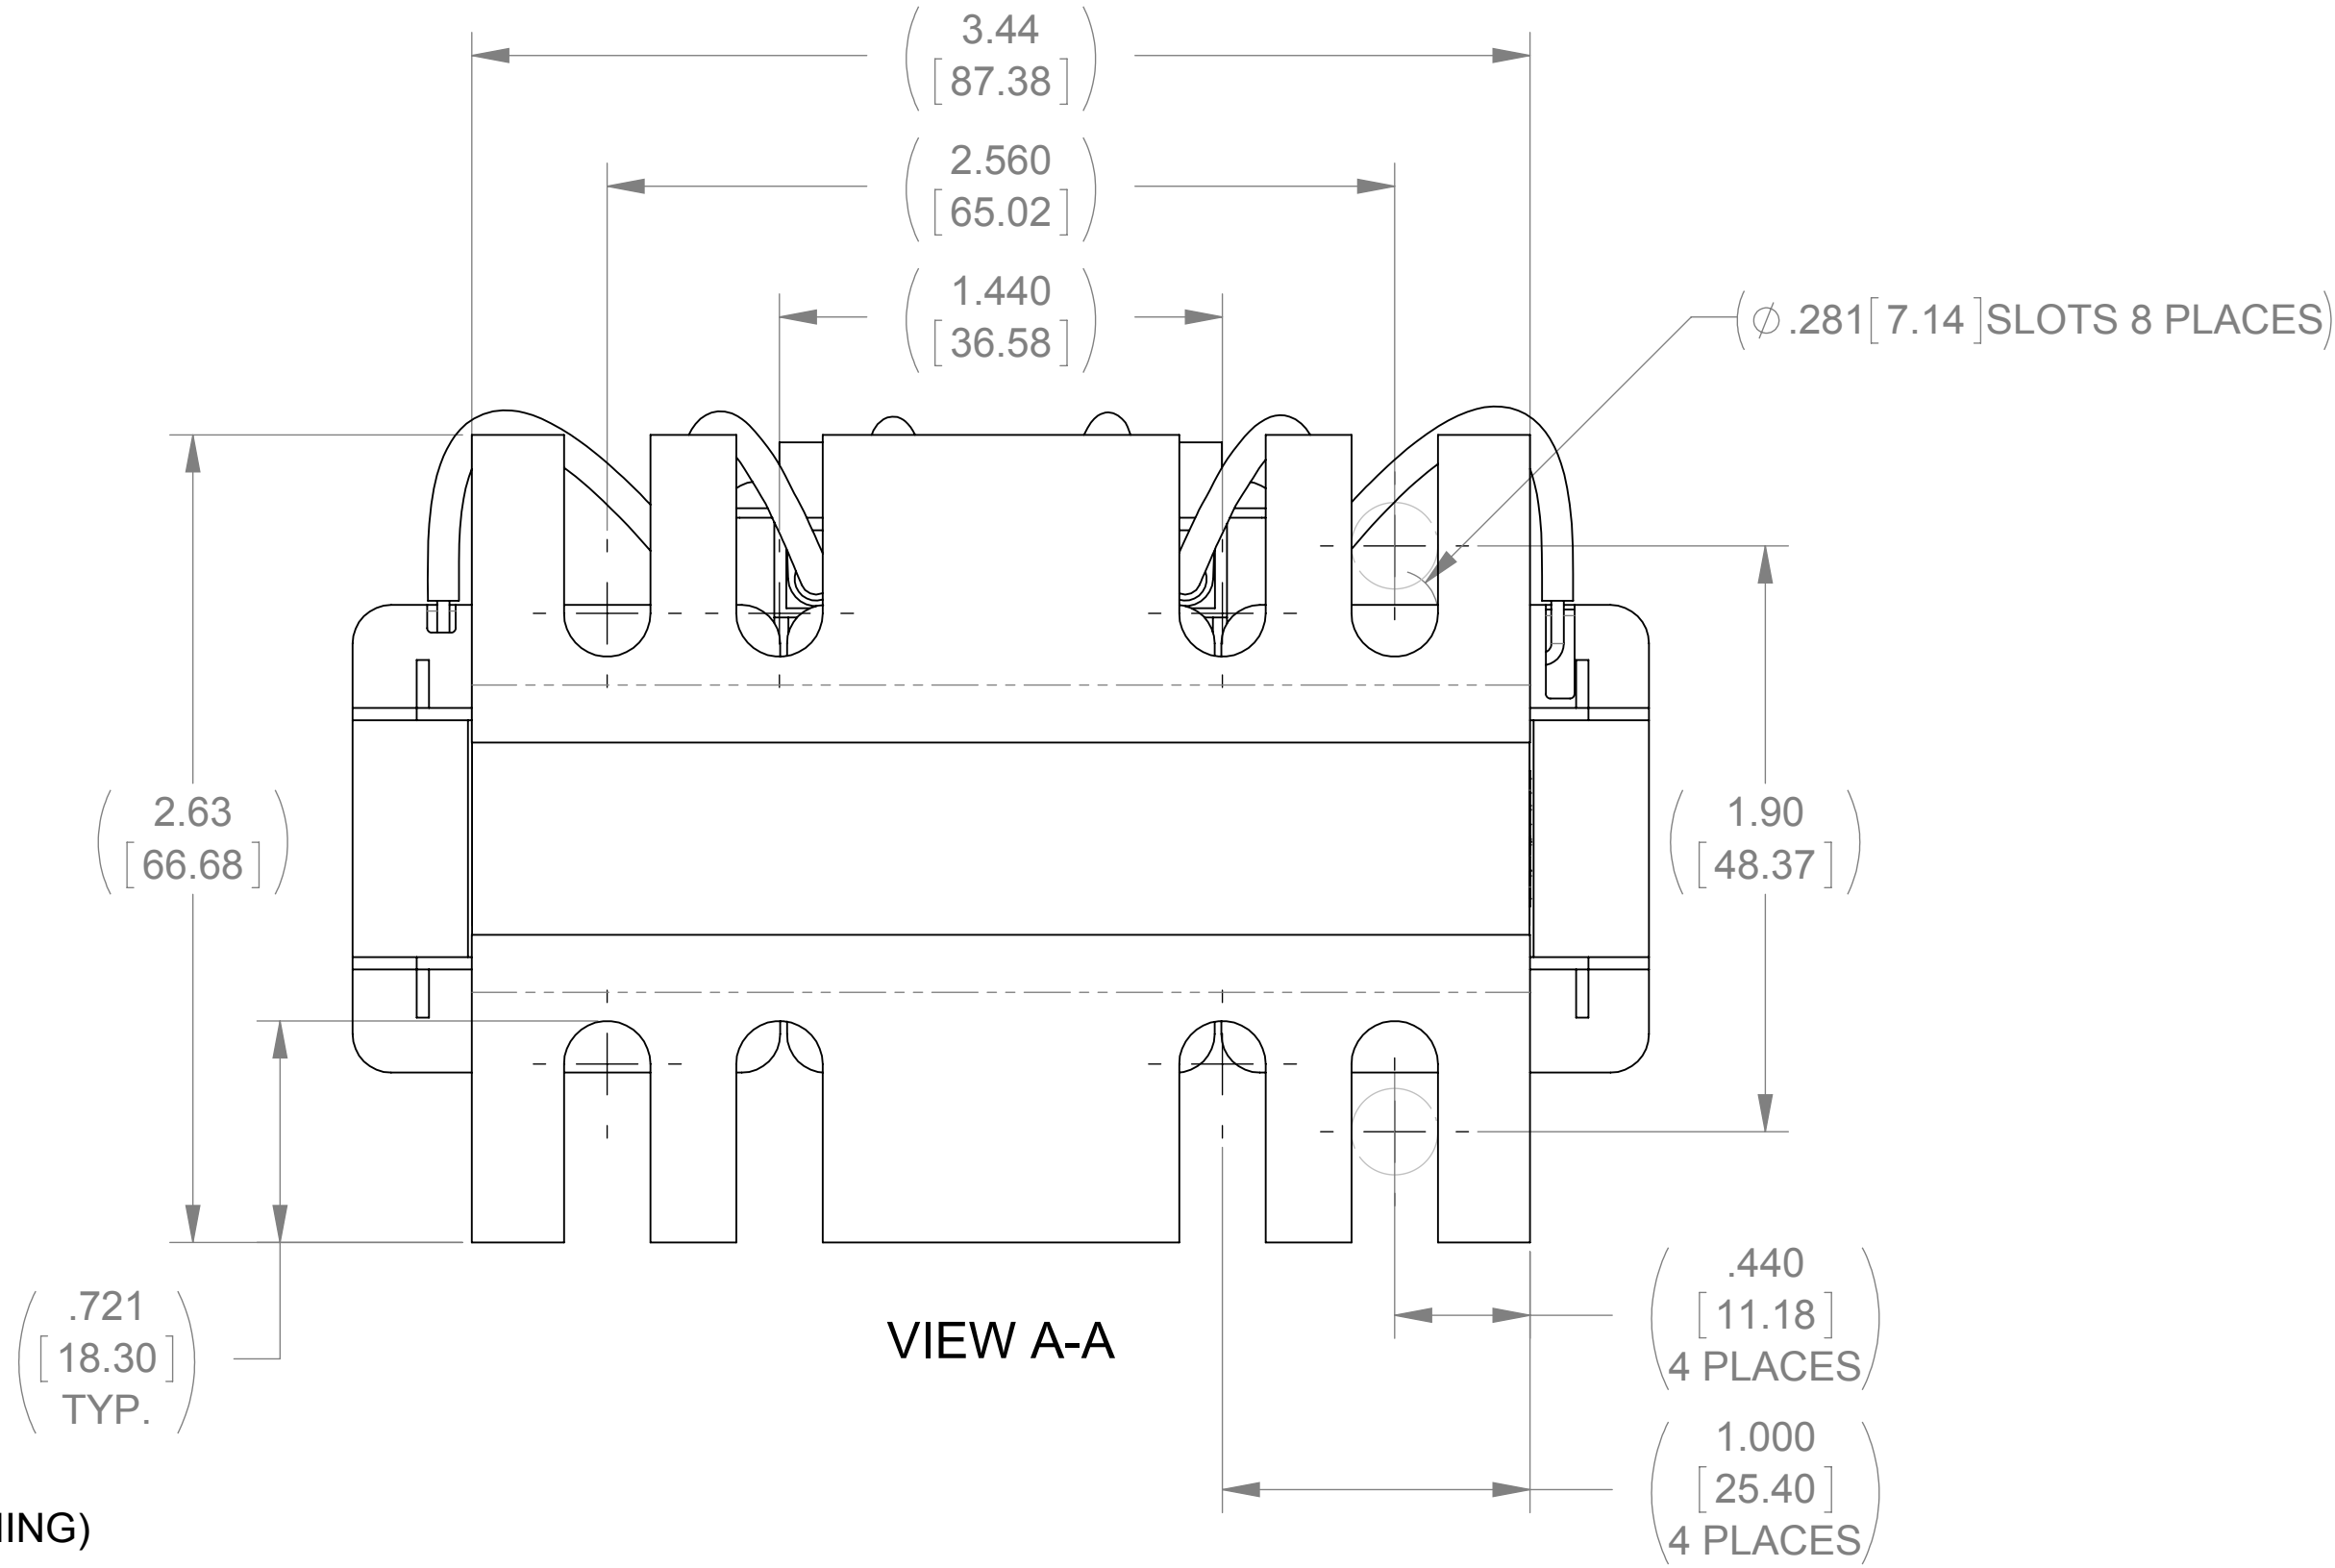



8			7			6			5			4			3			2			1			
WEIGHT (LBS)		INDUCTANCE	LOSS (WATTS)																		ECO No	DESCRIPTION	REV BY	DATE
3		7.7mH	37.5																		M8321	DIMENSION CHANGE	JP	12/14/12

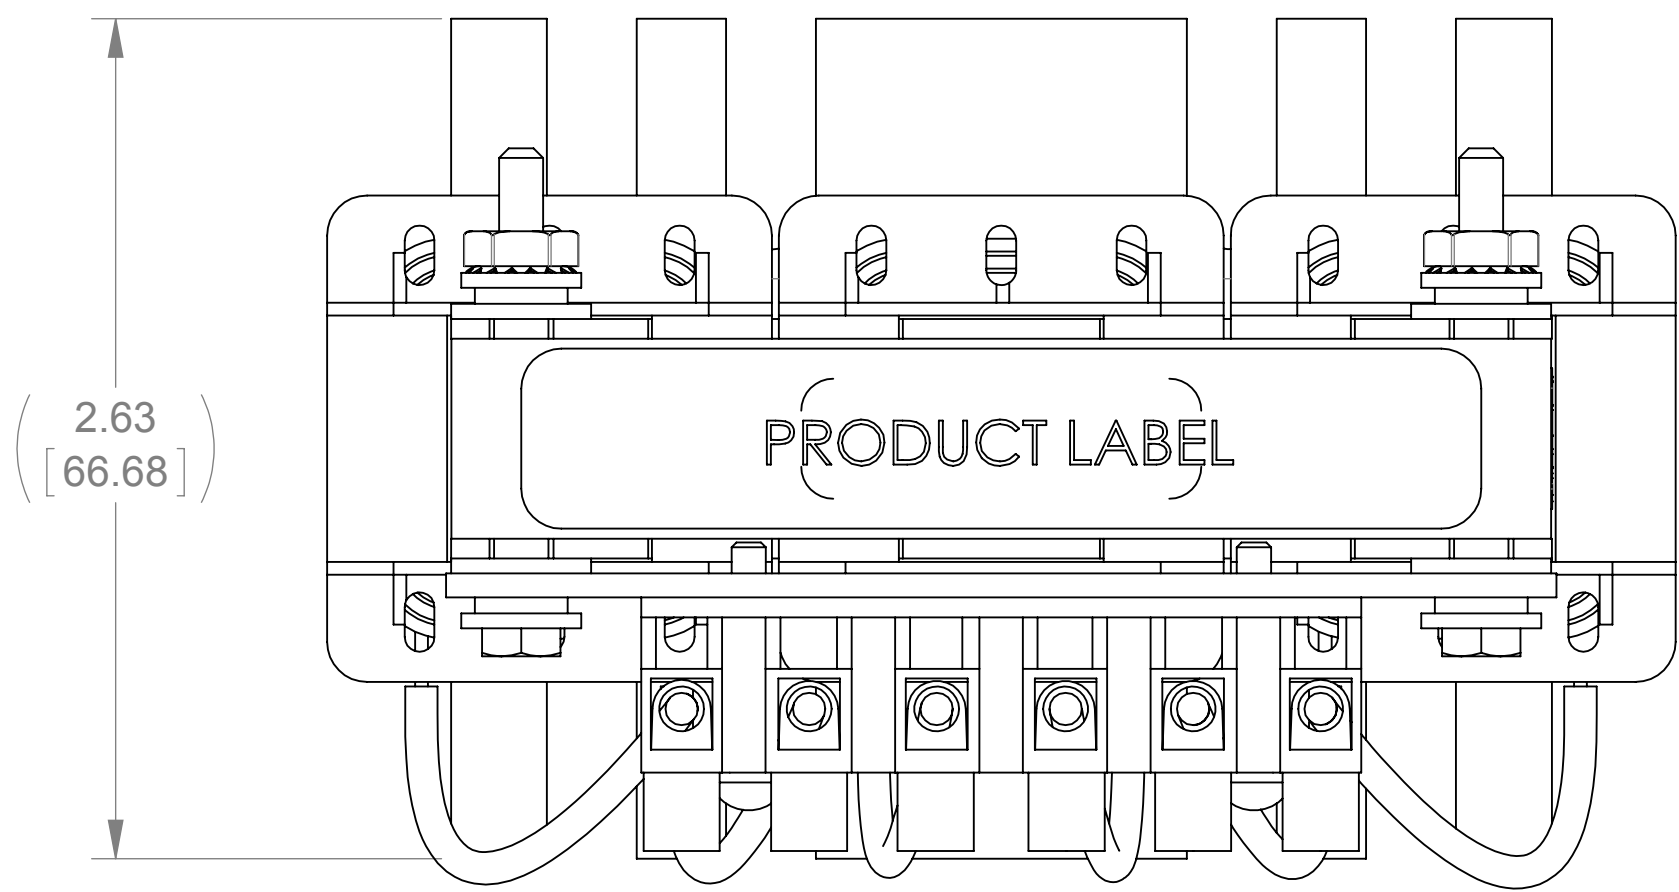

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lbs MAX
 2. WIRE RANGE: 22 - 10 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION			
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]				LINE REACTOR			
		DRAWN	DATE				
		JP	09/11/12				
		CHECKED	DATE				
		TM	12/21/12				
		APPROVED	DATE				
		TM	12/21/12				
				SIZE	DWG No.	REV	
				D	CD RLW-04P805	06	
				SCALE	5:3	SHEET 1 OF 1	