
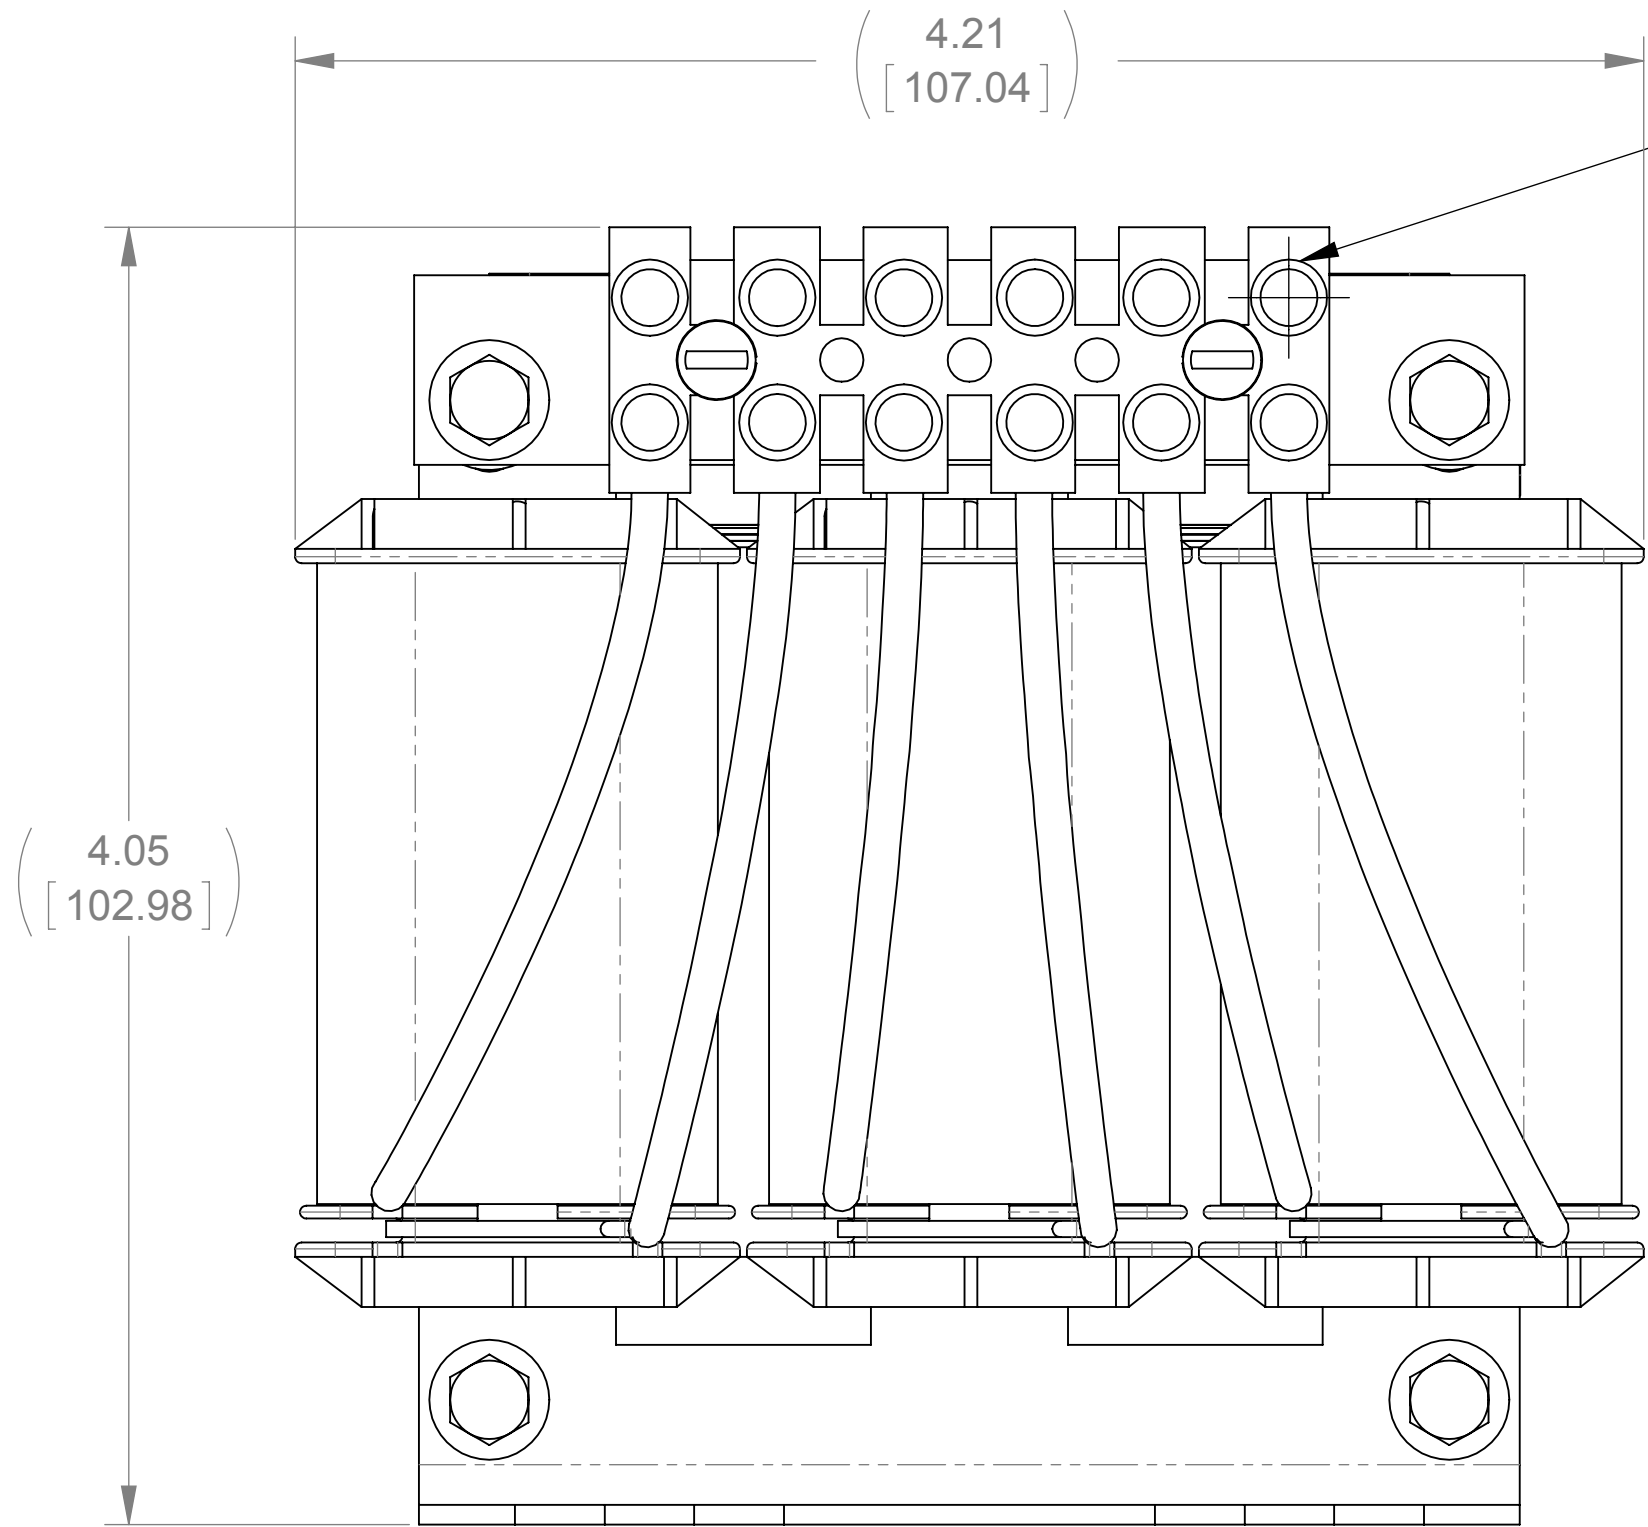



8	7	
WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
5	6mH	53.8

ECO No	DESCRIPTION	REV BY	DATE
M8321	DIMENSION CHANGE	JP	12/14/12

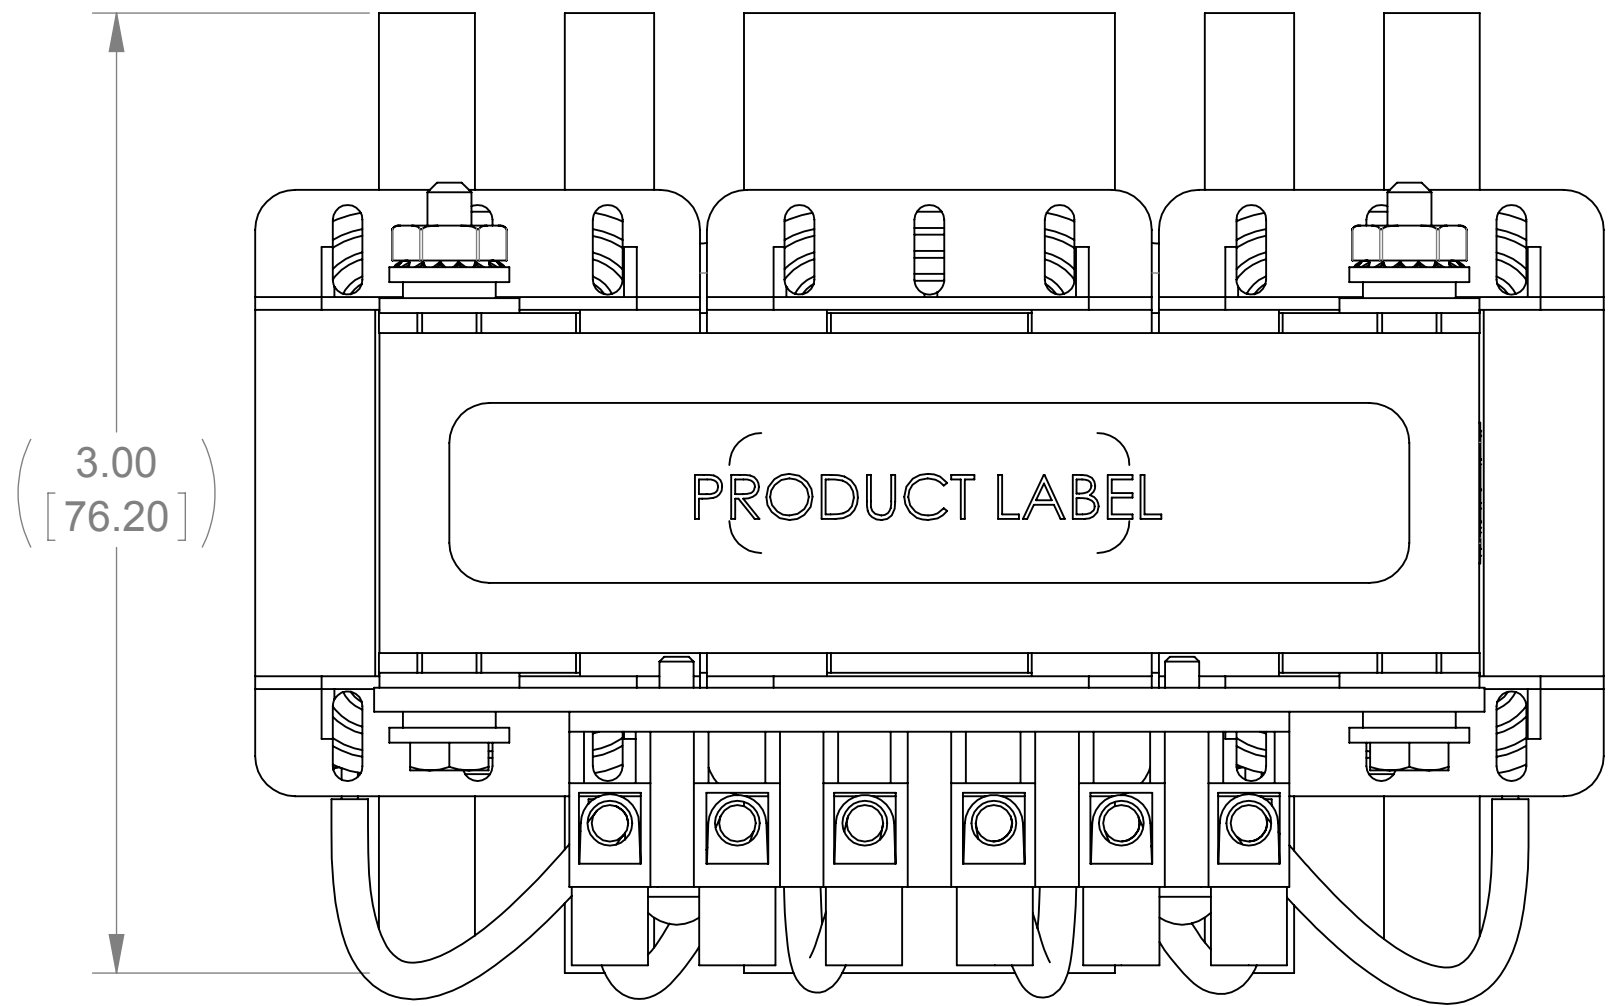

A

A

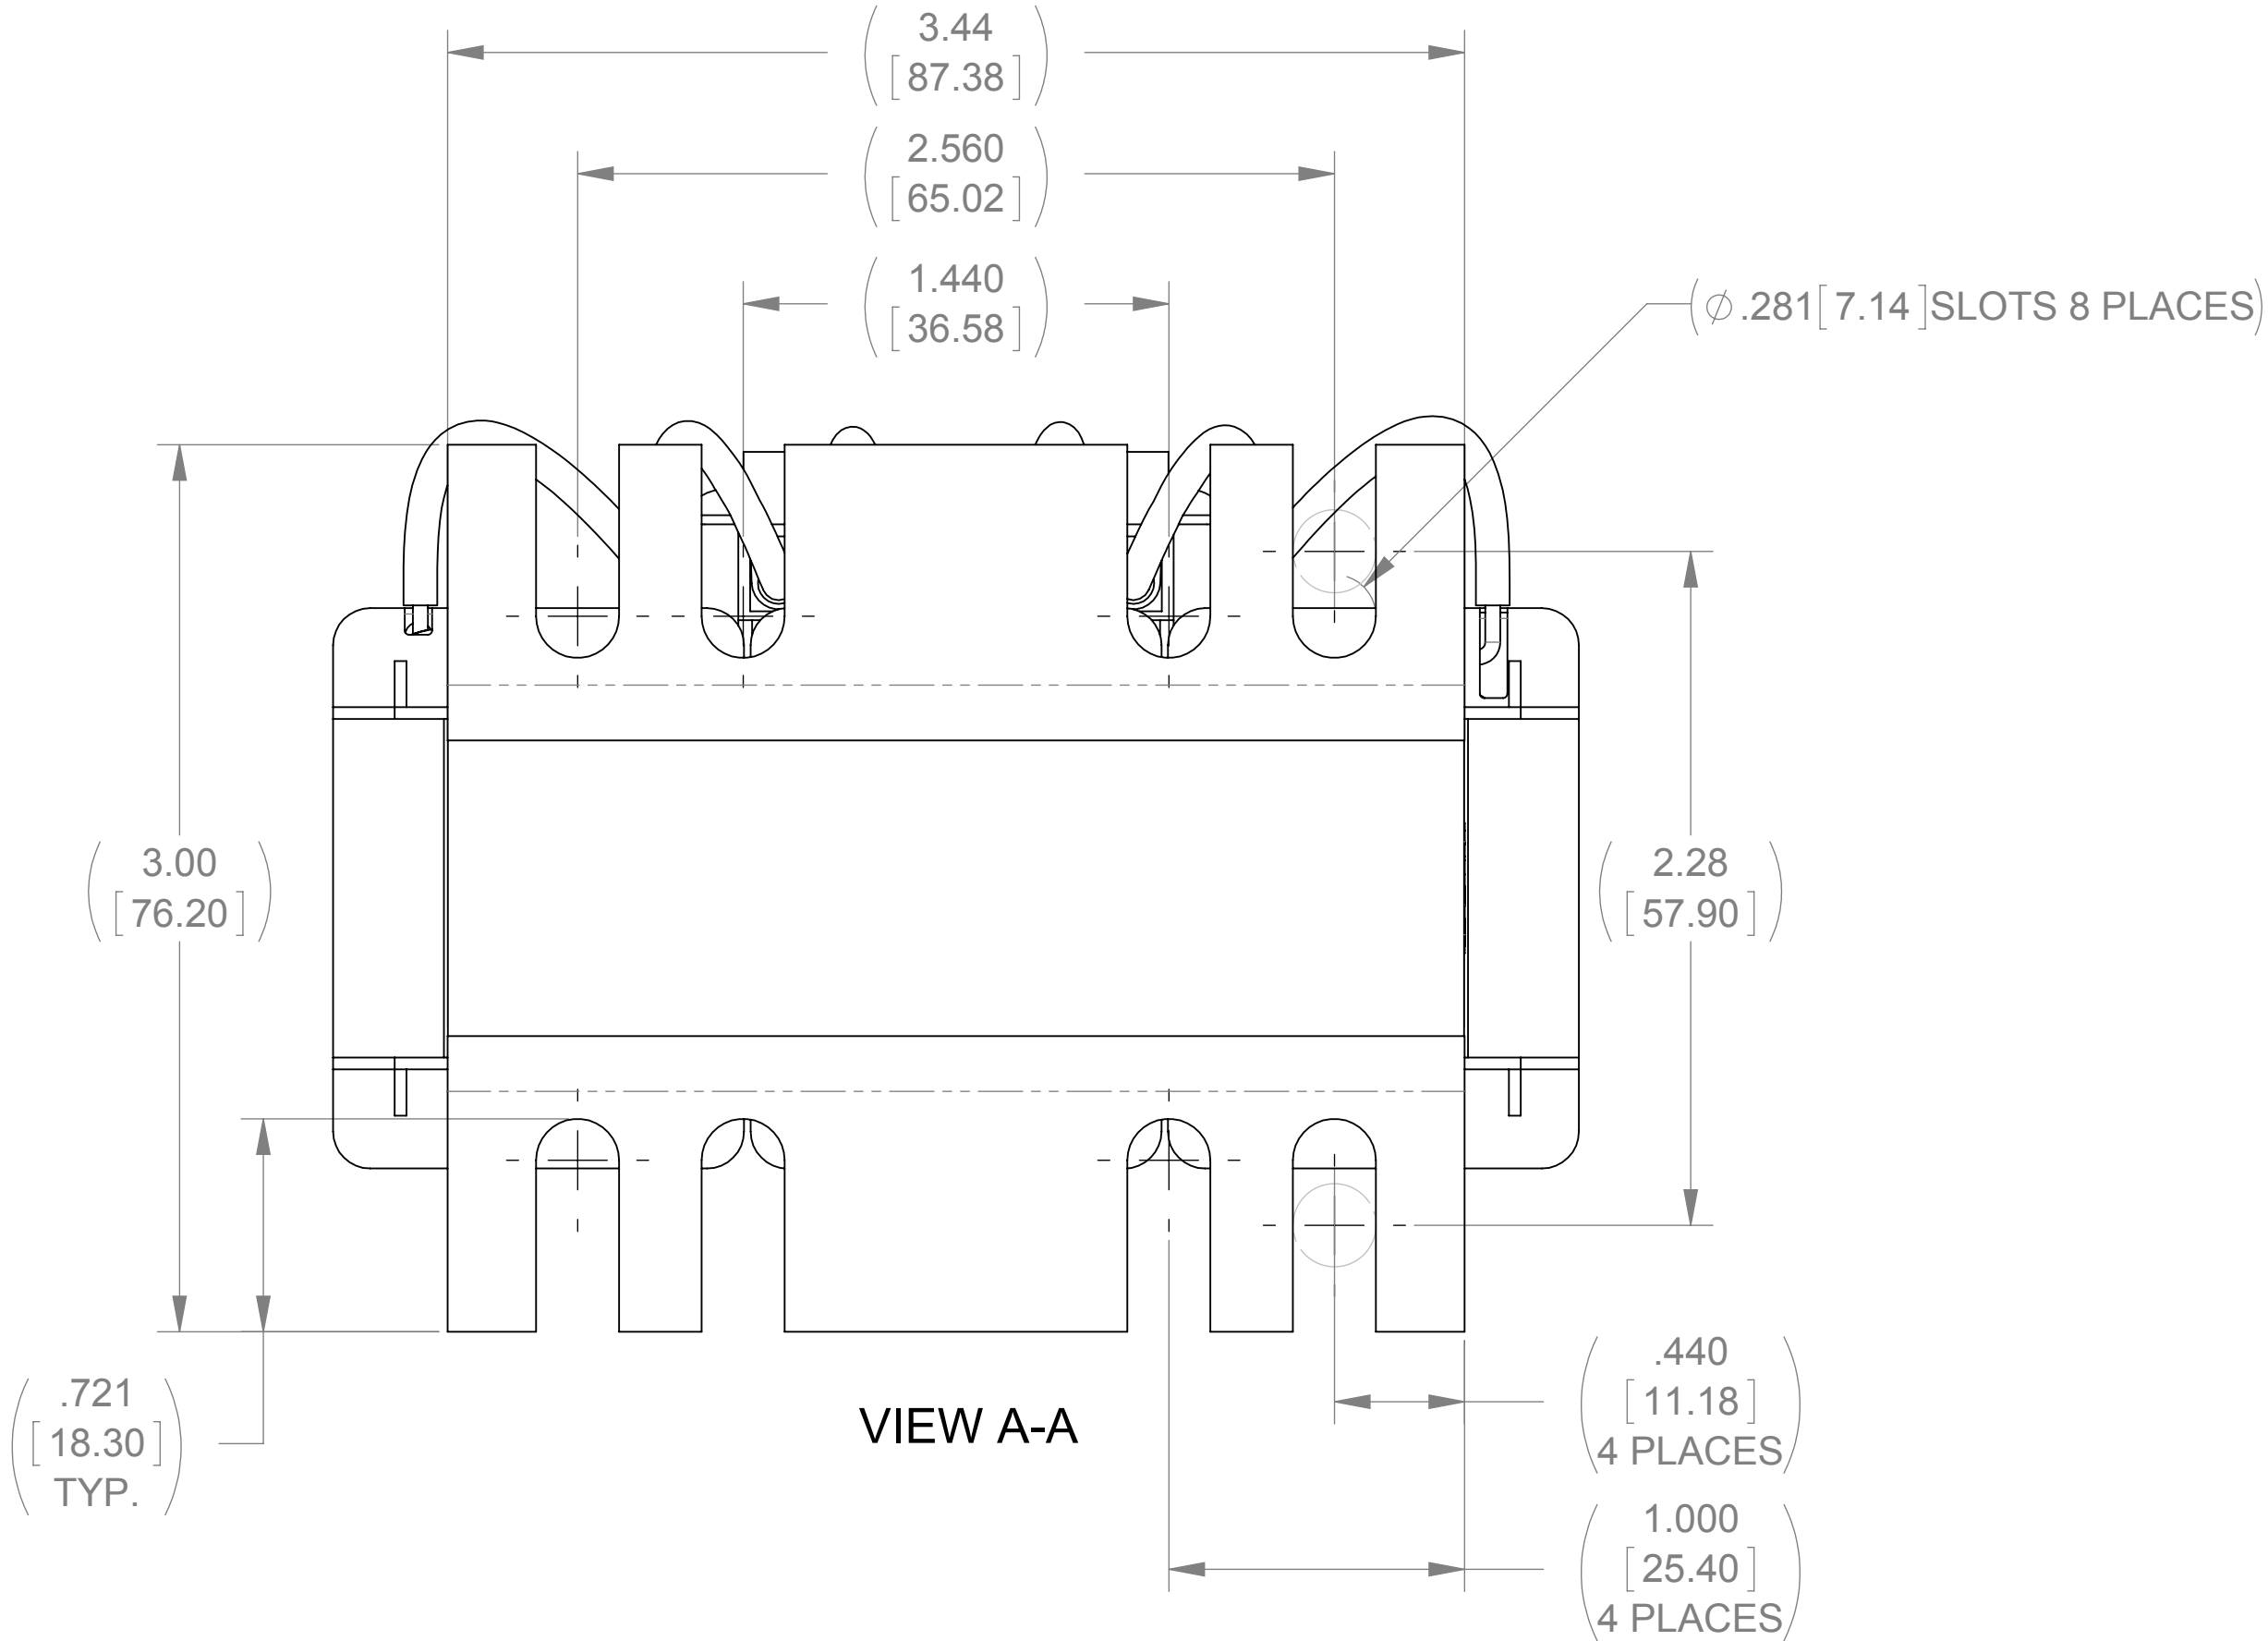


VIEW A-A

SEE NOTE (2)  
(WIRE RANGE)

NOTES:

1. TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lbs MAX
2. WIRE RANGE: 22 - 10 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION			
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:  ANGLES: ± 1 °  1 PLACE .X: ± .1 [2.5]  2 PLACE .XX: ± .03 [0.76]  3 PLACE .XXX: ± .010 [0.254]		  N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200		LINE REACTOR			
		DRAWN	DATE				
		JP	08/28/12				
		CHECKED	DATE				
		TM	12/21/12				
		APPROVED	DATE	SIZE		DWG No.	REV
		TM	12/21/12	D		CD RLW-07P606	07
				SCALE 5:3		SHEET 1 OF 1	