

APPROX WEIGHT
(LBS)
177

ECO No	DESCRIPTION	REV BY	DATE
M9495	DIM 4.23 WAS 4.73	RAH	03/17/15

D

C

B


A

D


C

B


A

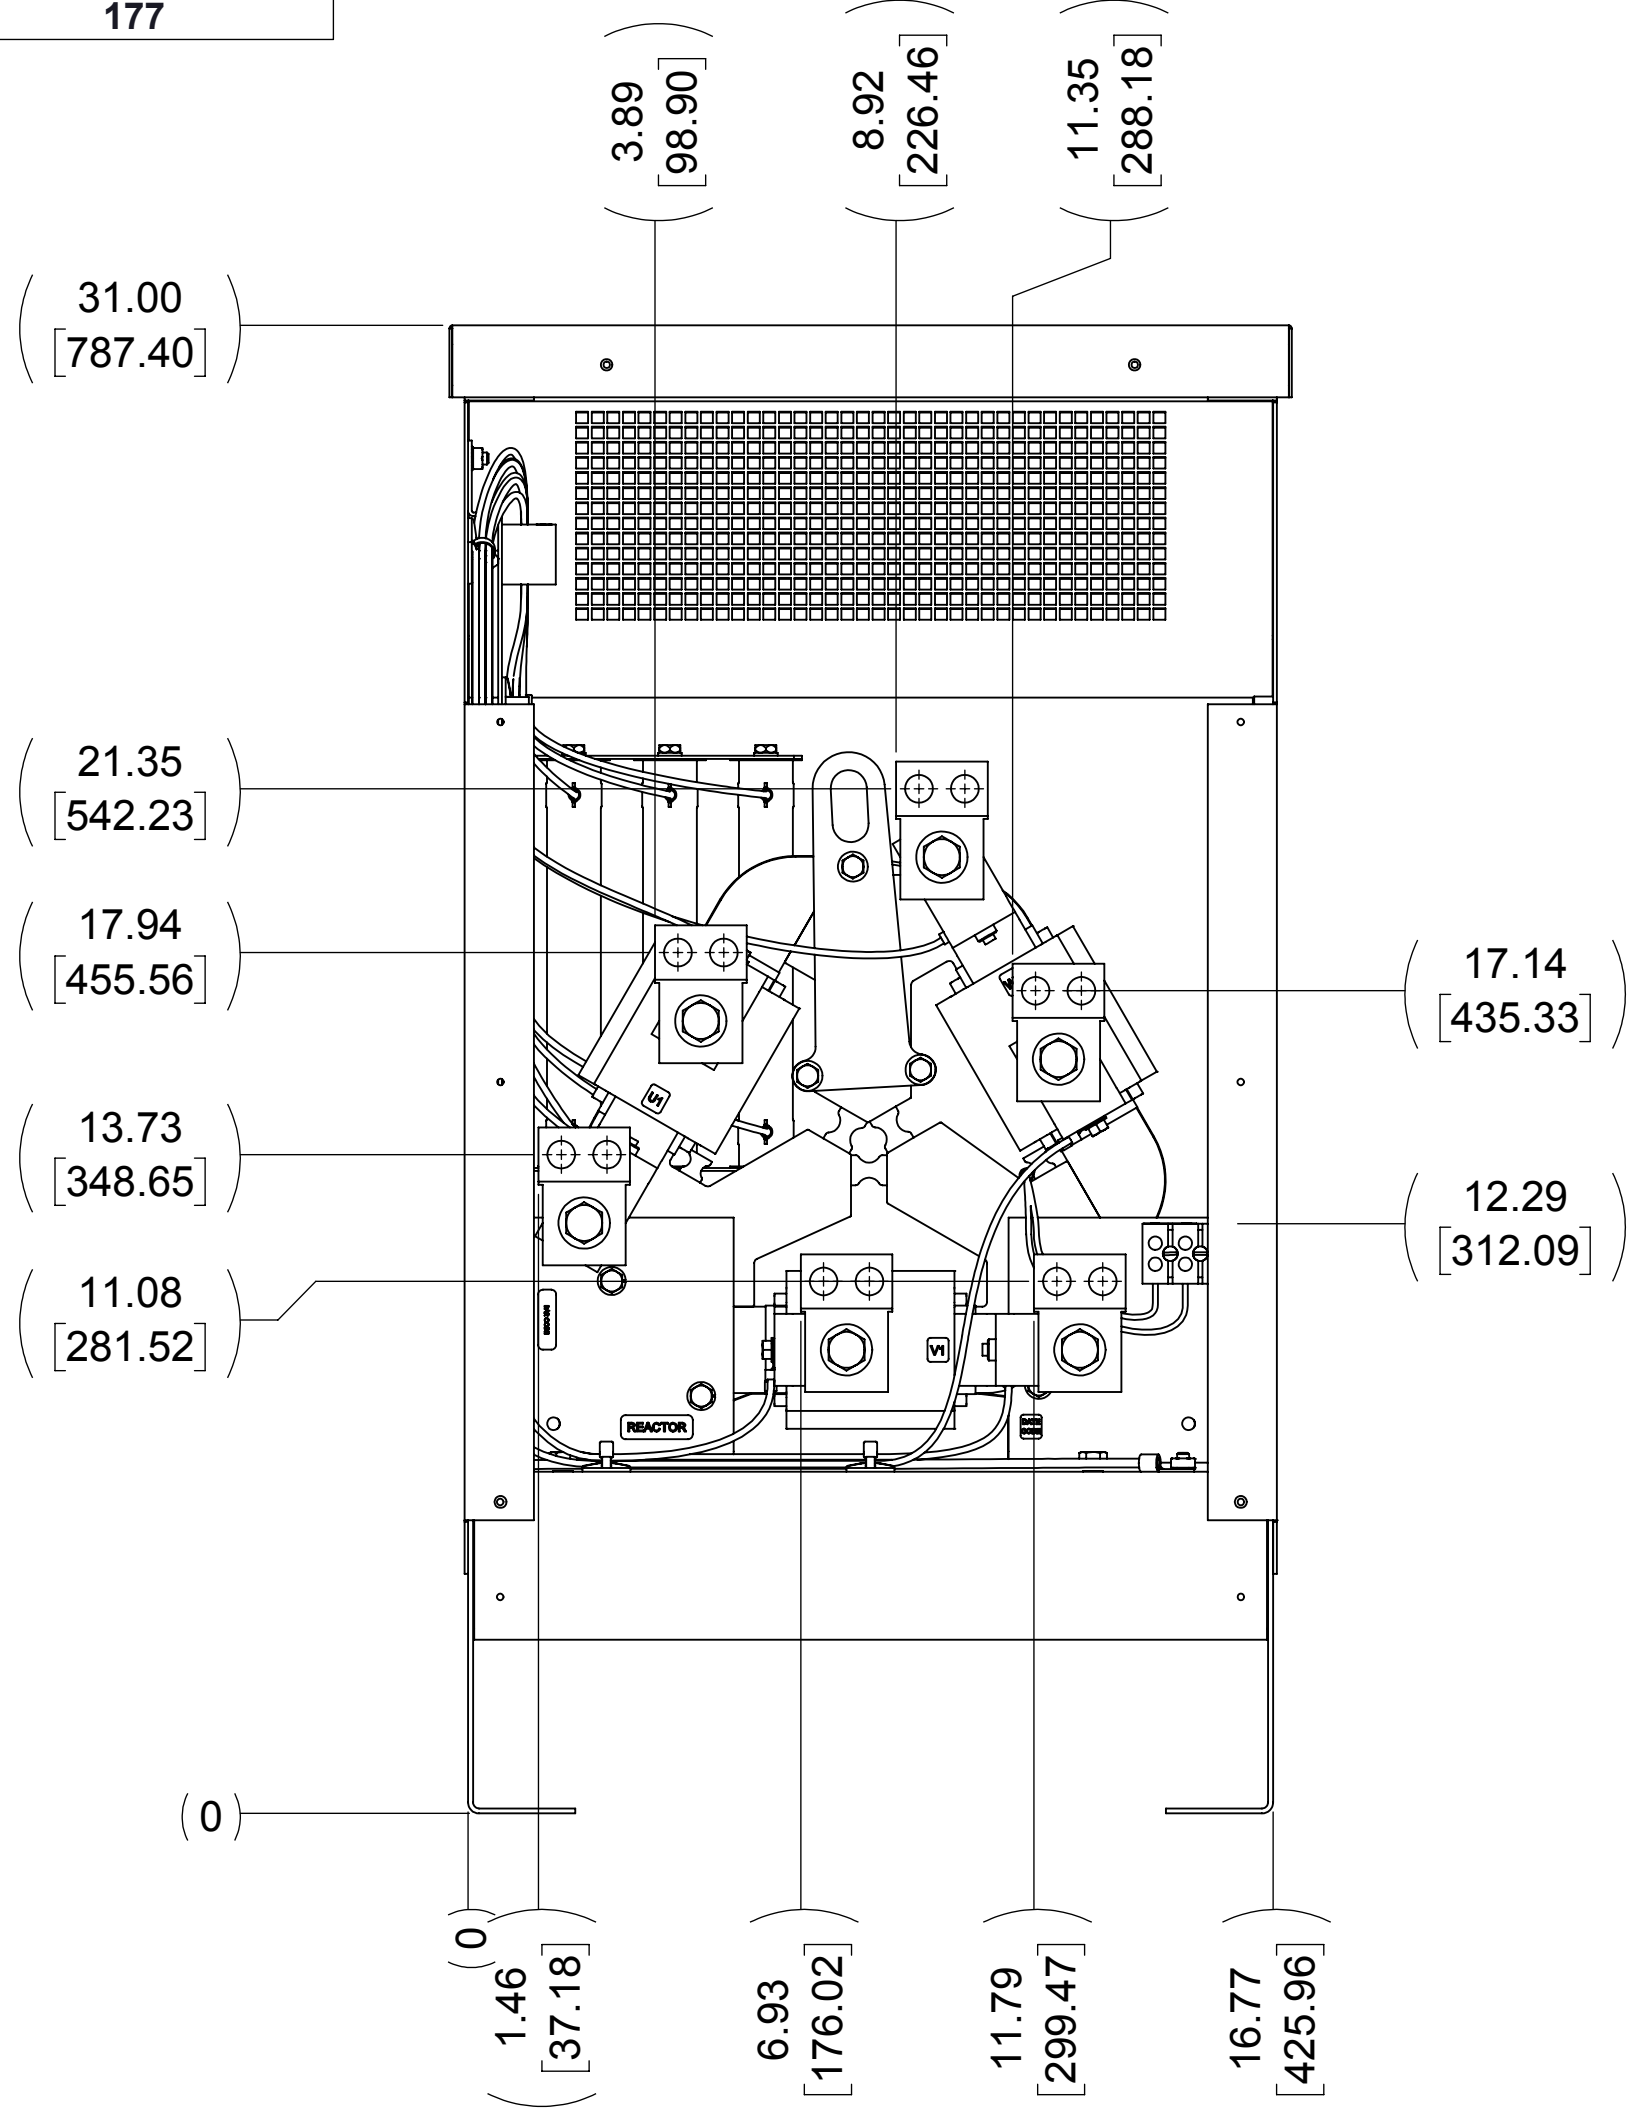


FRONT VIEW
(PANEL REMOVED)

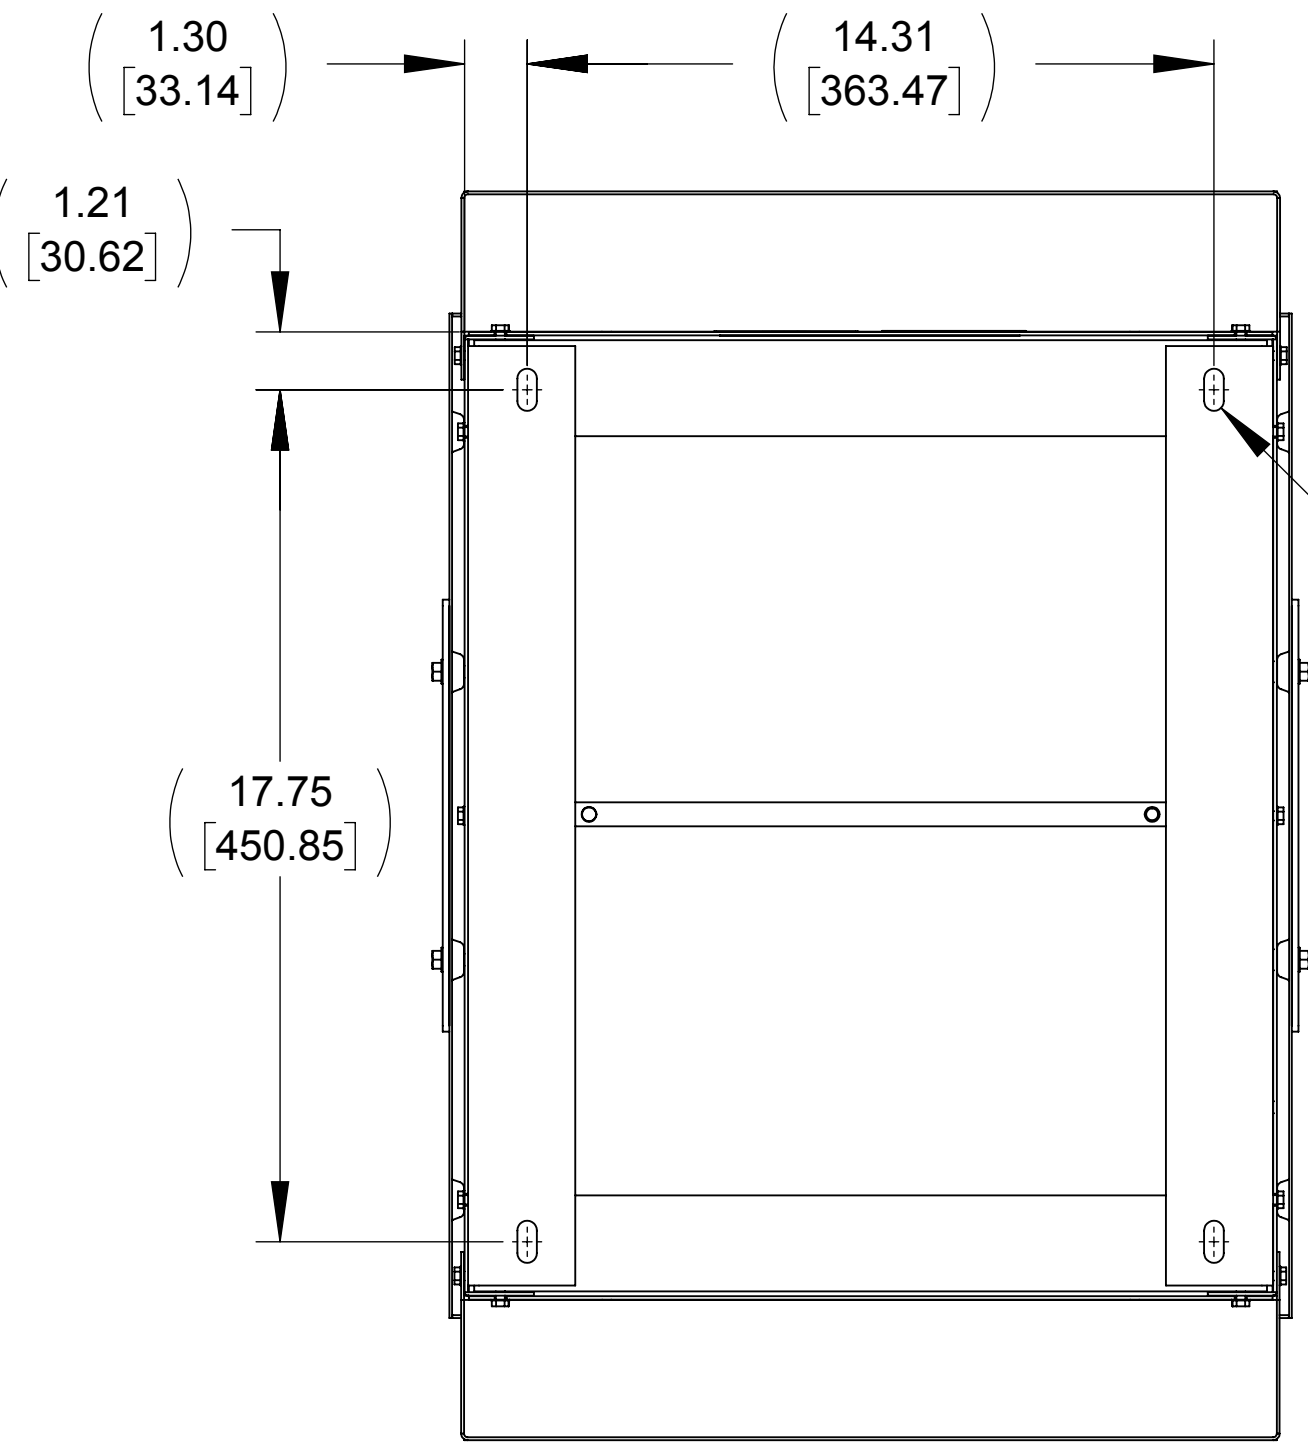

BOTTOM VIEW

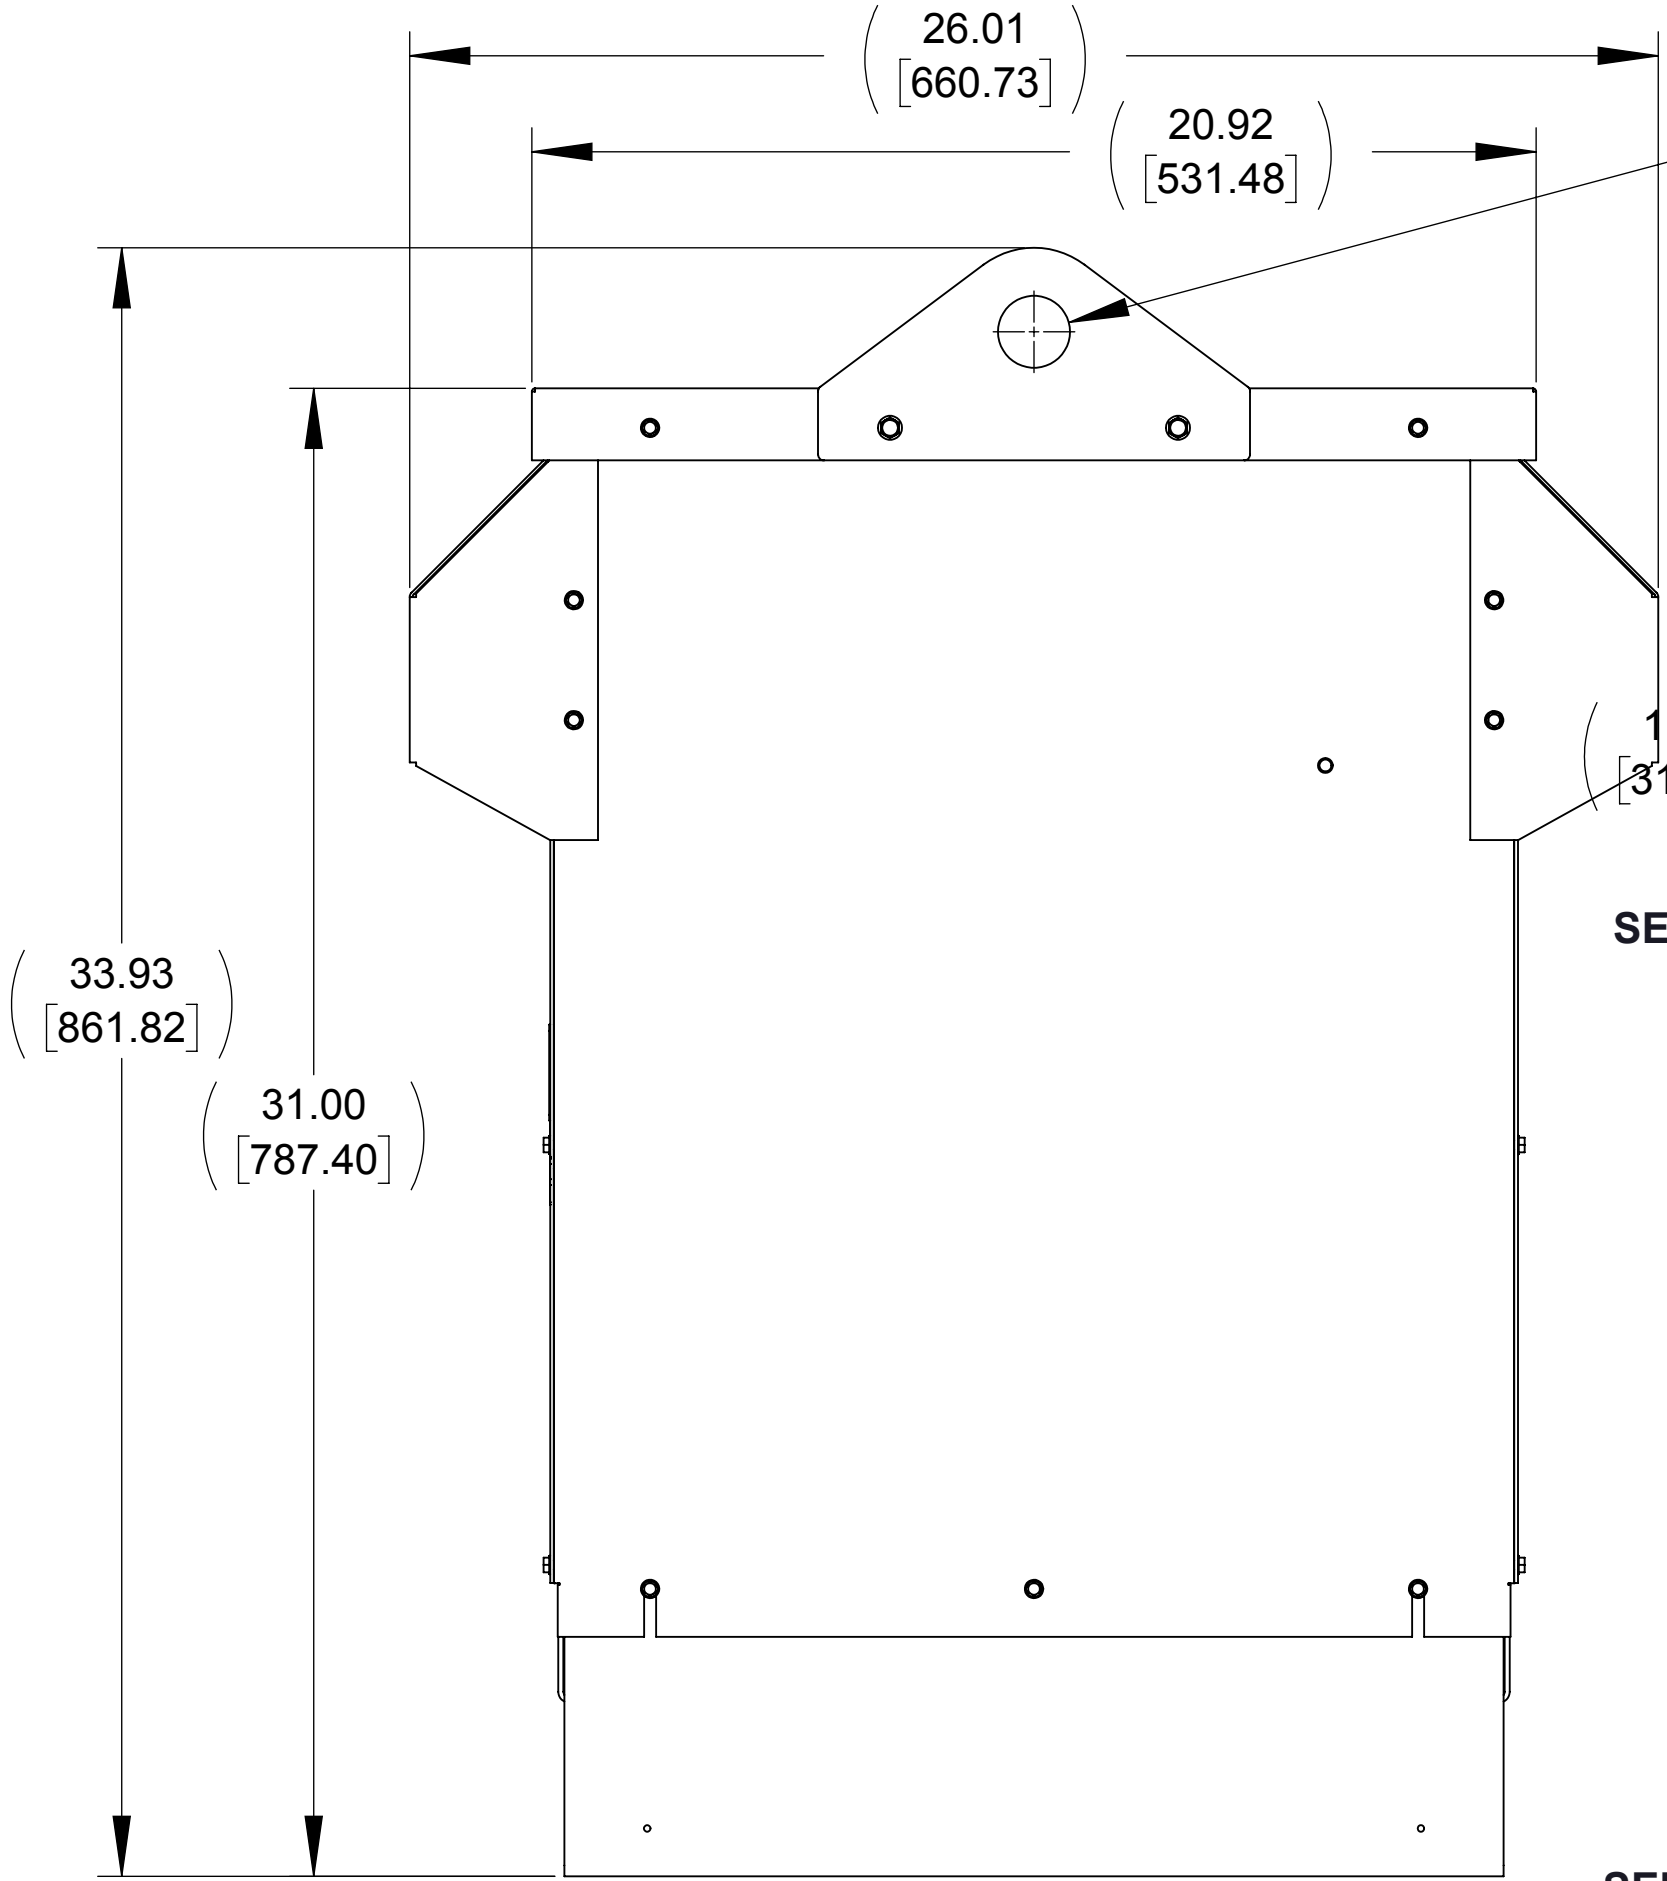


SIDE VIEW

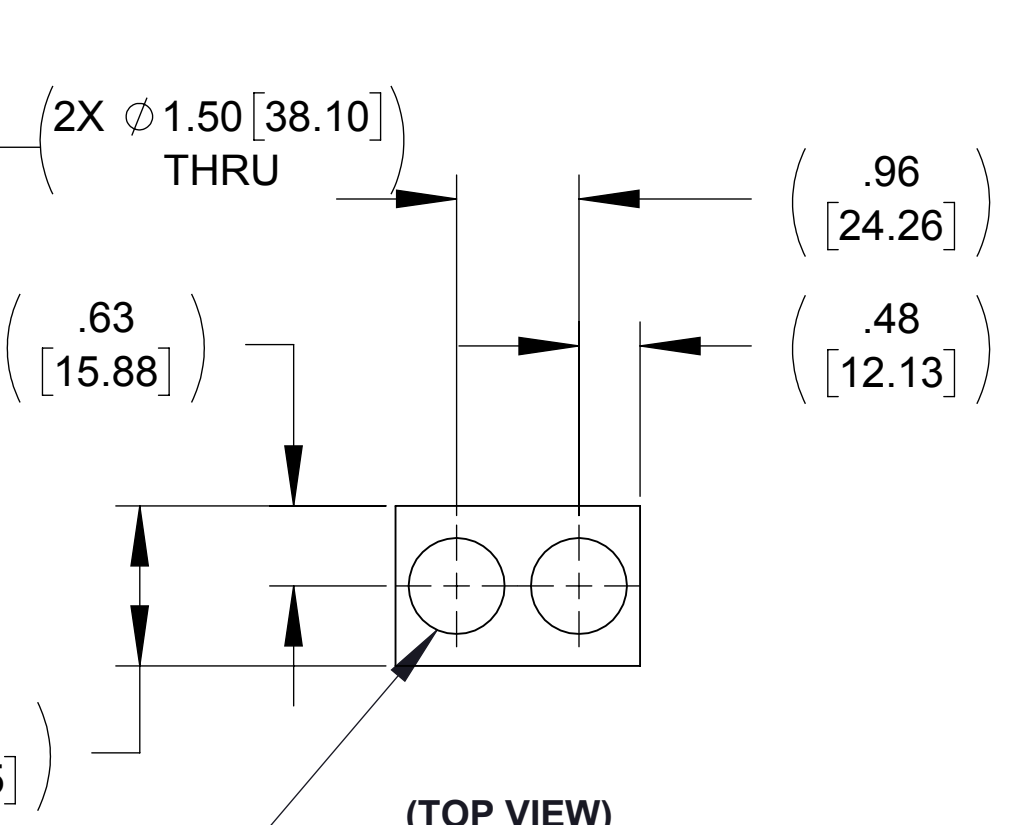

(TOP VIEW)

SEE NOTE 3

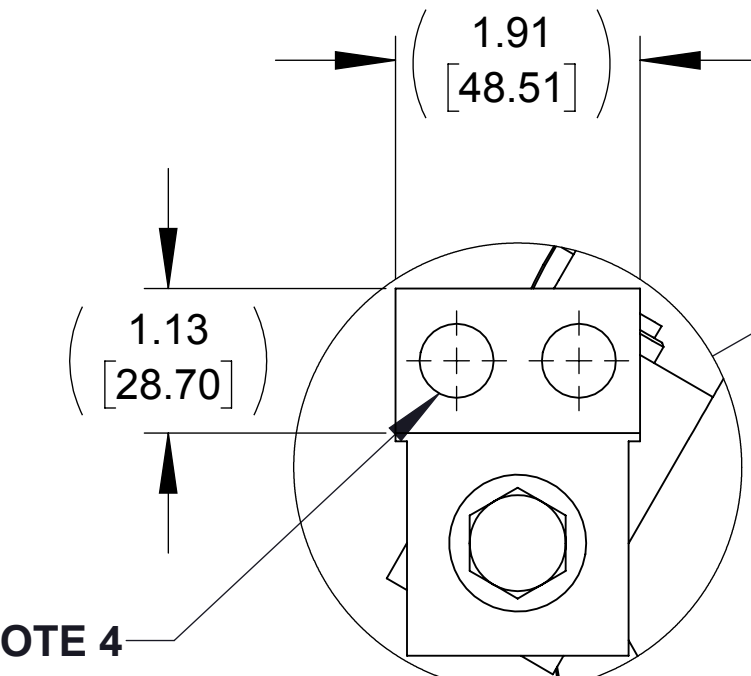


(FRONT VIEW)

FIELD TERMINAL
DETAIL
(6 PLACES)
(U1, U2, V1, V2, W1, W2)




GROUND
DETAIL

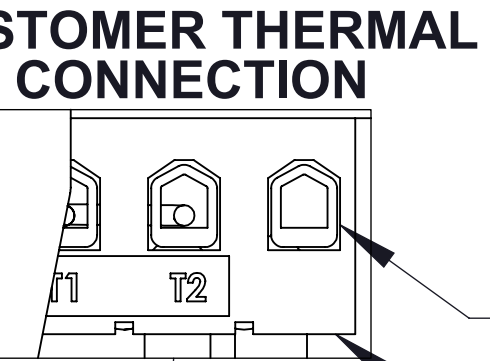

CUSTOMER THERMAL
CONNECTION


4X Ø .41 [10.41]
X .88 [22.35] SLOT

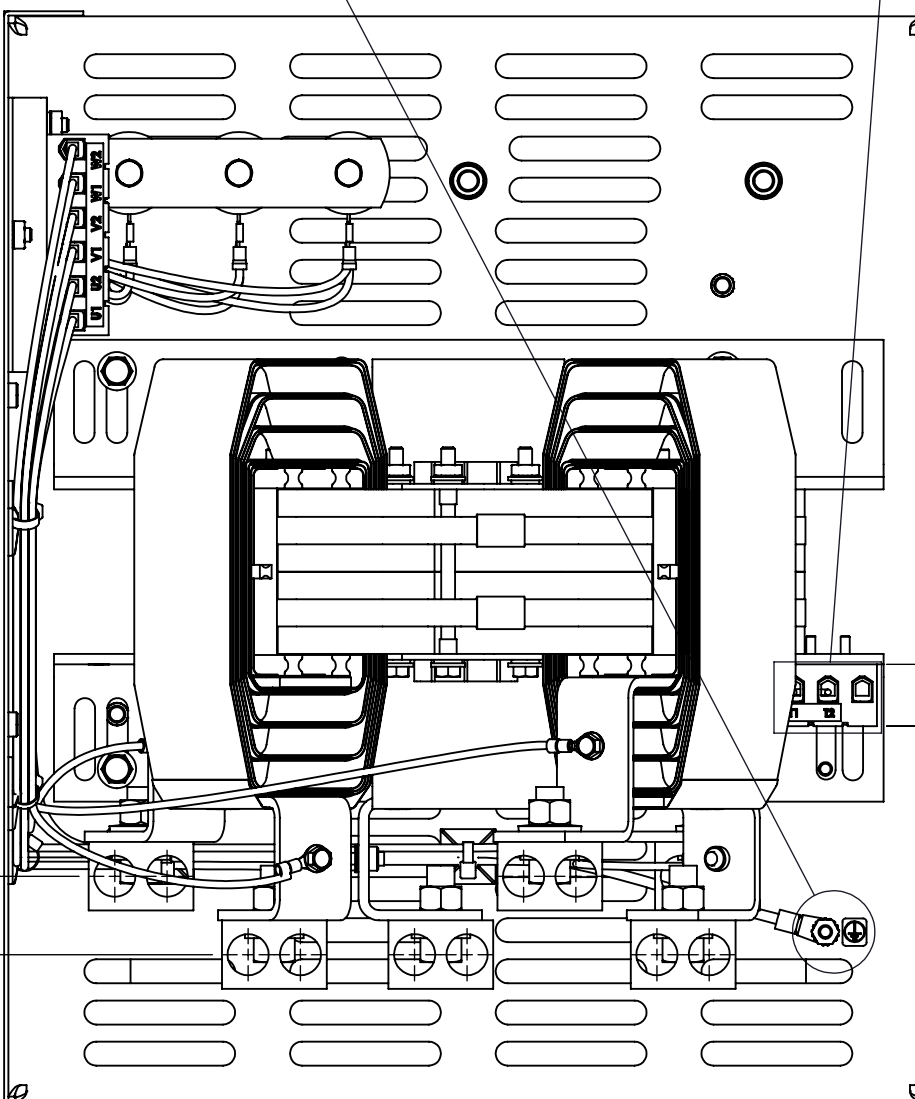

TOP VIEW
(PANELS REMOVED)

NOTES:

1. WIRE RANGE: 4 - 18 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 350 kcmil - 6 AWG.
4. TERMINAL SCREW TIGHTENING TORQUE: 500 IN/LBS, MAX.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION			
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		 N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200		DV SENTRY 250A 380-600V FILTER, NEMA 3R ENCL.			
DRAWN		DATE		SIZE	DWG No.	REV	
MM		07/31/14					
CHECKED		DATE		SCALE	1:4	SHEET 1 OF 1	
RH		03/18/15					
APPROVED		DATE		CD DVSW0250E			
RH		03/18/15					

