
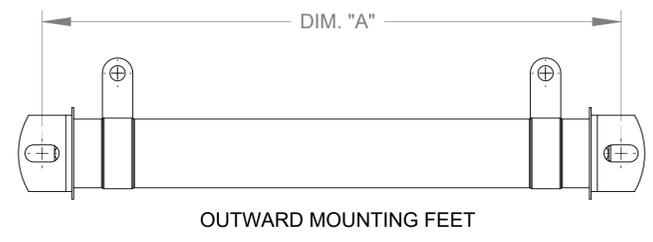


ECO No	DESCRIPTION	REV BY	DATE
M13558	RESISTOR-191 ADDED	JD	03/26/21



SINGLE RESISTOR TYPE								
MTE P/N	RESISTANCE IN OHMS (Ω)	WATTS	DIM. "A"	DIM. "B"	DIM. "C"	SLOT DIM. "D"	TERMINATION TYPE	MTG. FEET DIRECTION
RESISTOR-136	390	50	4.5"	0.50"	1.375"	.22"X.44"	FASTON	OUTWARD
RESISTOR-144	3000	100	4.5"	0.50"	1.375"	.22"X.44"	FASTON	OUTWARD
RESISTOR-145	2200	100	4.5"	0.50"	1.375"	.22"X.44"	FASTON	OUTWARD

DOUBLE RESISTOR TYPE								
MTE P/N	RESISTANCE IN OHMS (Ω)	WATTS	DIM. "A"	DIM. "B"	DIM. "C"	SLOT DIM. "D"	TERMINATION TYPE	MTG. FEET DIRECTION
RESISTOR-141	600	100	7.5"	0.75"	3.25"	.22"X.44"	FASTON	OUTWARD

TRIPLE RESISTOR TYPE								
MTE P/N	RESISTANCE IN OHMS (Ω)	WATTS	DIM. "A"	DIM. "B"	DIM. "C"	SLOT DIM. "D"	TERMINATION TYPE	MTG. FEET DIRECTION
RESISTOR-022	200	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-023	150	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-024	100	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-025	75	175	9.5"	1.25"	6.06"	.22"X.44"	FASTON	OUTWARD
RESISTOR-026	50	175	9.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-028	10	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-040	16	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-041	15	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-029	8	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-047	900	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-049	300	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-050	200	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-051	150	175	9.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-052	100	175	9.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-054	50	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-055	36	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-056	30	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-058	600	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-065	36	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-071	12	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-075	1000	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-076	390	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-079	390	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-084	160	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-085	120	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-086	50	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-087	200	175	9.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-088	66	175	9.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-091	42	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-096	1800	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-097	1200	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-098	1000	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-099	600	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-100	330	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	INWARD
RESISTOR-101	270	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	INWARD
RESISTOR-102	68	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-103	39	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-104	27	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-020	500	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-105	20	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-106	12	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-110	390	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	INWARD
RESISTOR-111	1	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-114	2	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-115	1	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-116	0.5	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-117	0.5	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-118	0.25	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-122	3	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-124	1.5	100	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-128	0.20	300	9.5"	1.25"	6.25"	.28"X.56"	LUG	OUTWARD
RESISTOR-129	0.40	300	9.5"	1.25"	6.25"	.28"X.56"	LUG	OUTWARD
RESISTOR-134	5	150	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-137	15	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-138	0.75	50	5.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-142	1.50	300	9.5"	1.25"	6.25"	.28"X.56"	LUG	OUTWARD
RESISTOR-154	50	240	7.5"	1.25"	6.06"	.28"X.56"	FASTON	OUTWARD
RESISTOR-155	25	180	7.5"	0.75"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-157	10,000	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-158	25	300	9.5"	1.25"	6.25"	.28"X.56"	FASTON	OUTWARD
RESISTOR-164	42	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-165	30	25	3.0"	0.50"	4.87"	.22"X.44"	FASTON	OUTWARD
RESISTOR-170	1	180	5.86"	0.75"	4.87"	.22"X.44"	FASTON	INWARD
RESISTOR-191	50	180	7.5"	0.75"	5.00"	.22"X.44"	FASTON	OUTWARD

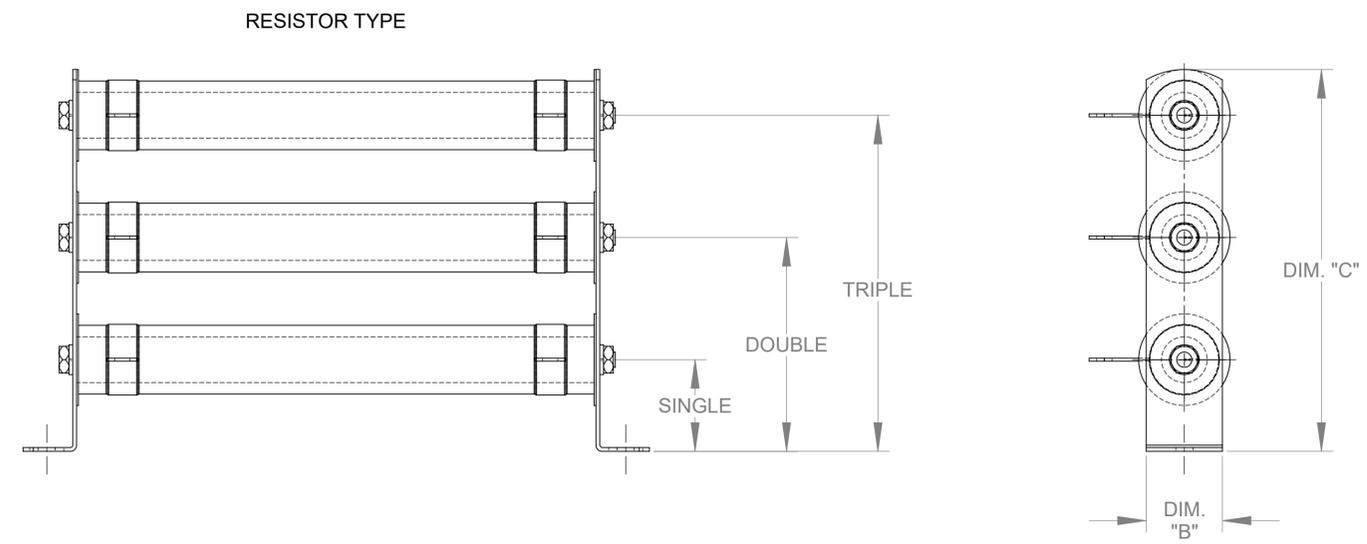

MOUNTING FEET VIEWS

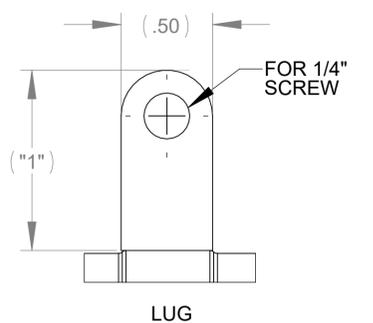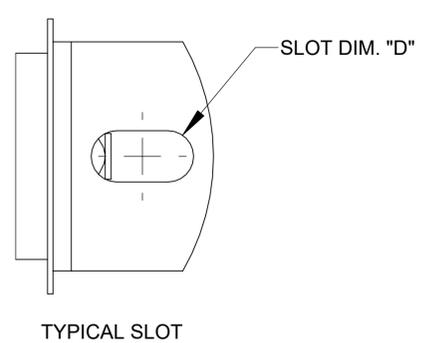

TERMINATION TYPES

NOTES:

1. ALL COMPONENTS MUST BE UL RECOGNIZED.
2. RESISTORS MUST BE OF A RIB-WOUND CONSTRUCTION.
3. MAXIMUM TEMPERATURE MUST NOT EXCEED A 375°C RISE IN A 40°C AMBIENT @ RATED POWER.
4. RESISTANCE VALUE TOLERANCE ±10%

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2		DRAWN BY:	DATE	CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION			
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION		RT	02/05/14				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .XX: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]	CHECKED BY:	JD	03/26/21	DESCRIPTION RESISTOR SPECIFICATION CHART			
	ME APPROVED BY:	DP	03/26/21				
	RE APPROVED BY:	PY	03/26/21				
<p>N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200</p>		SIZE	D	DWG No.	RESISTOR-XXX	REV	05
		SCALE	1:1	Sheet1	SHEET 1 OF 1		