



APPROX. WEIGHT  
(LBS)  
72


ECO No	DESCRIPTION	REV BY	DATE
M14117	ALL HARNESSES CHANGED TO BLACK / DEPTH REFERENCE DIMENSION NOW 15.15"	JD	11/19/21

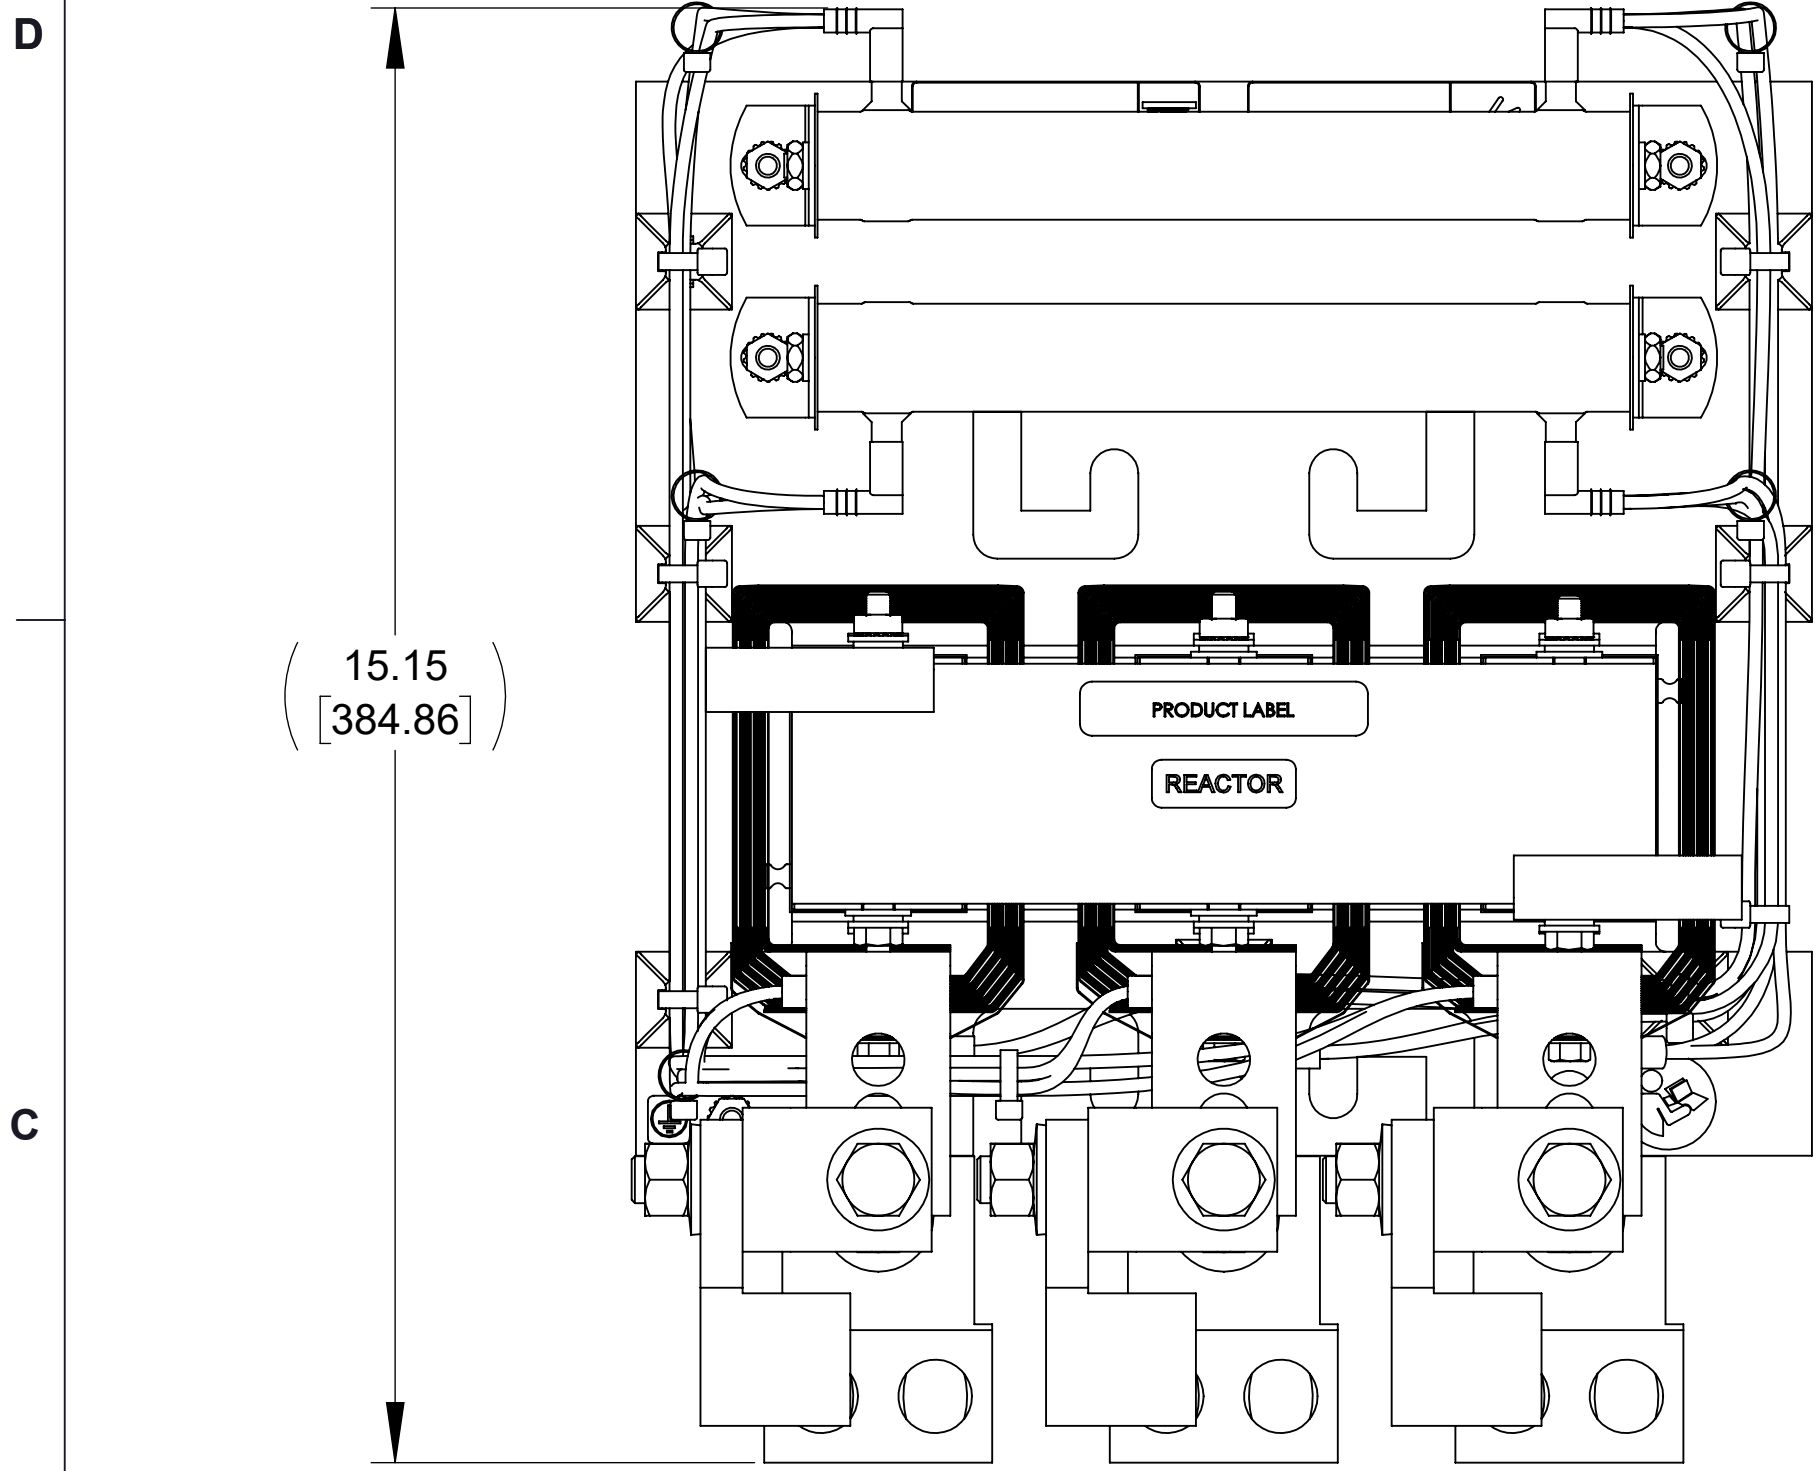


TOP VIEW

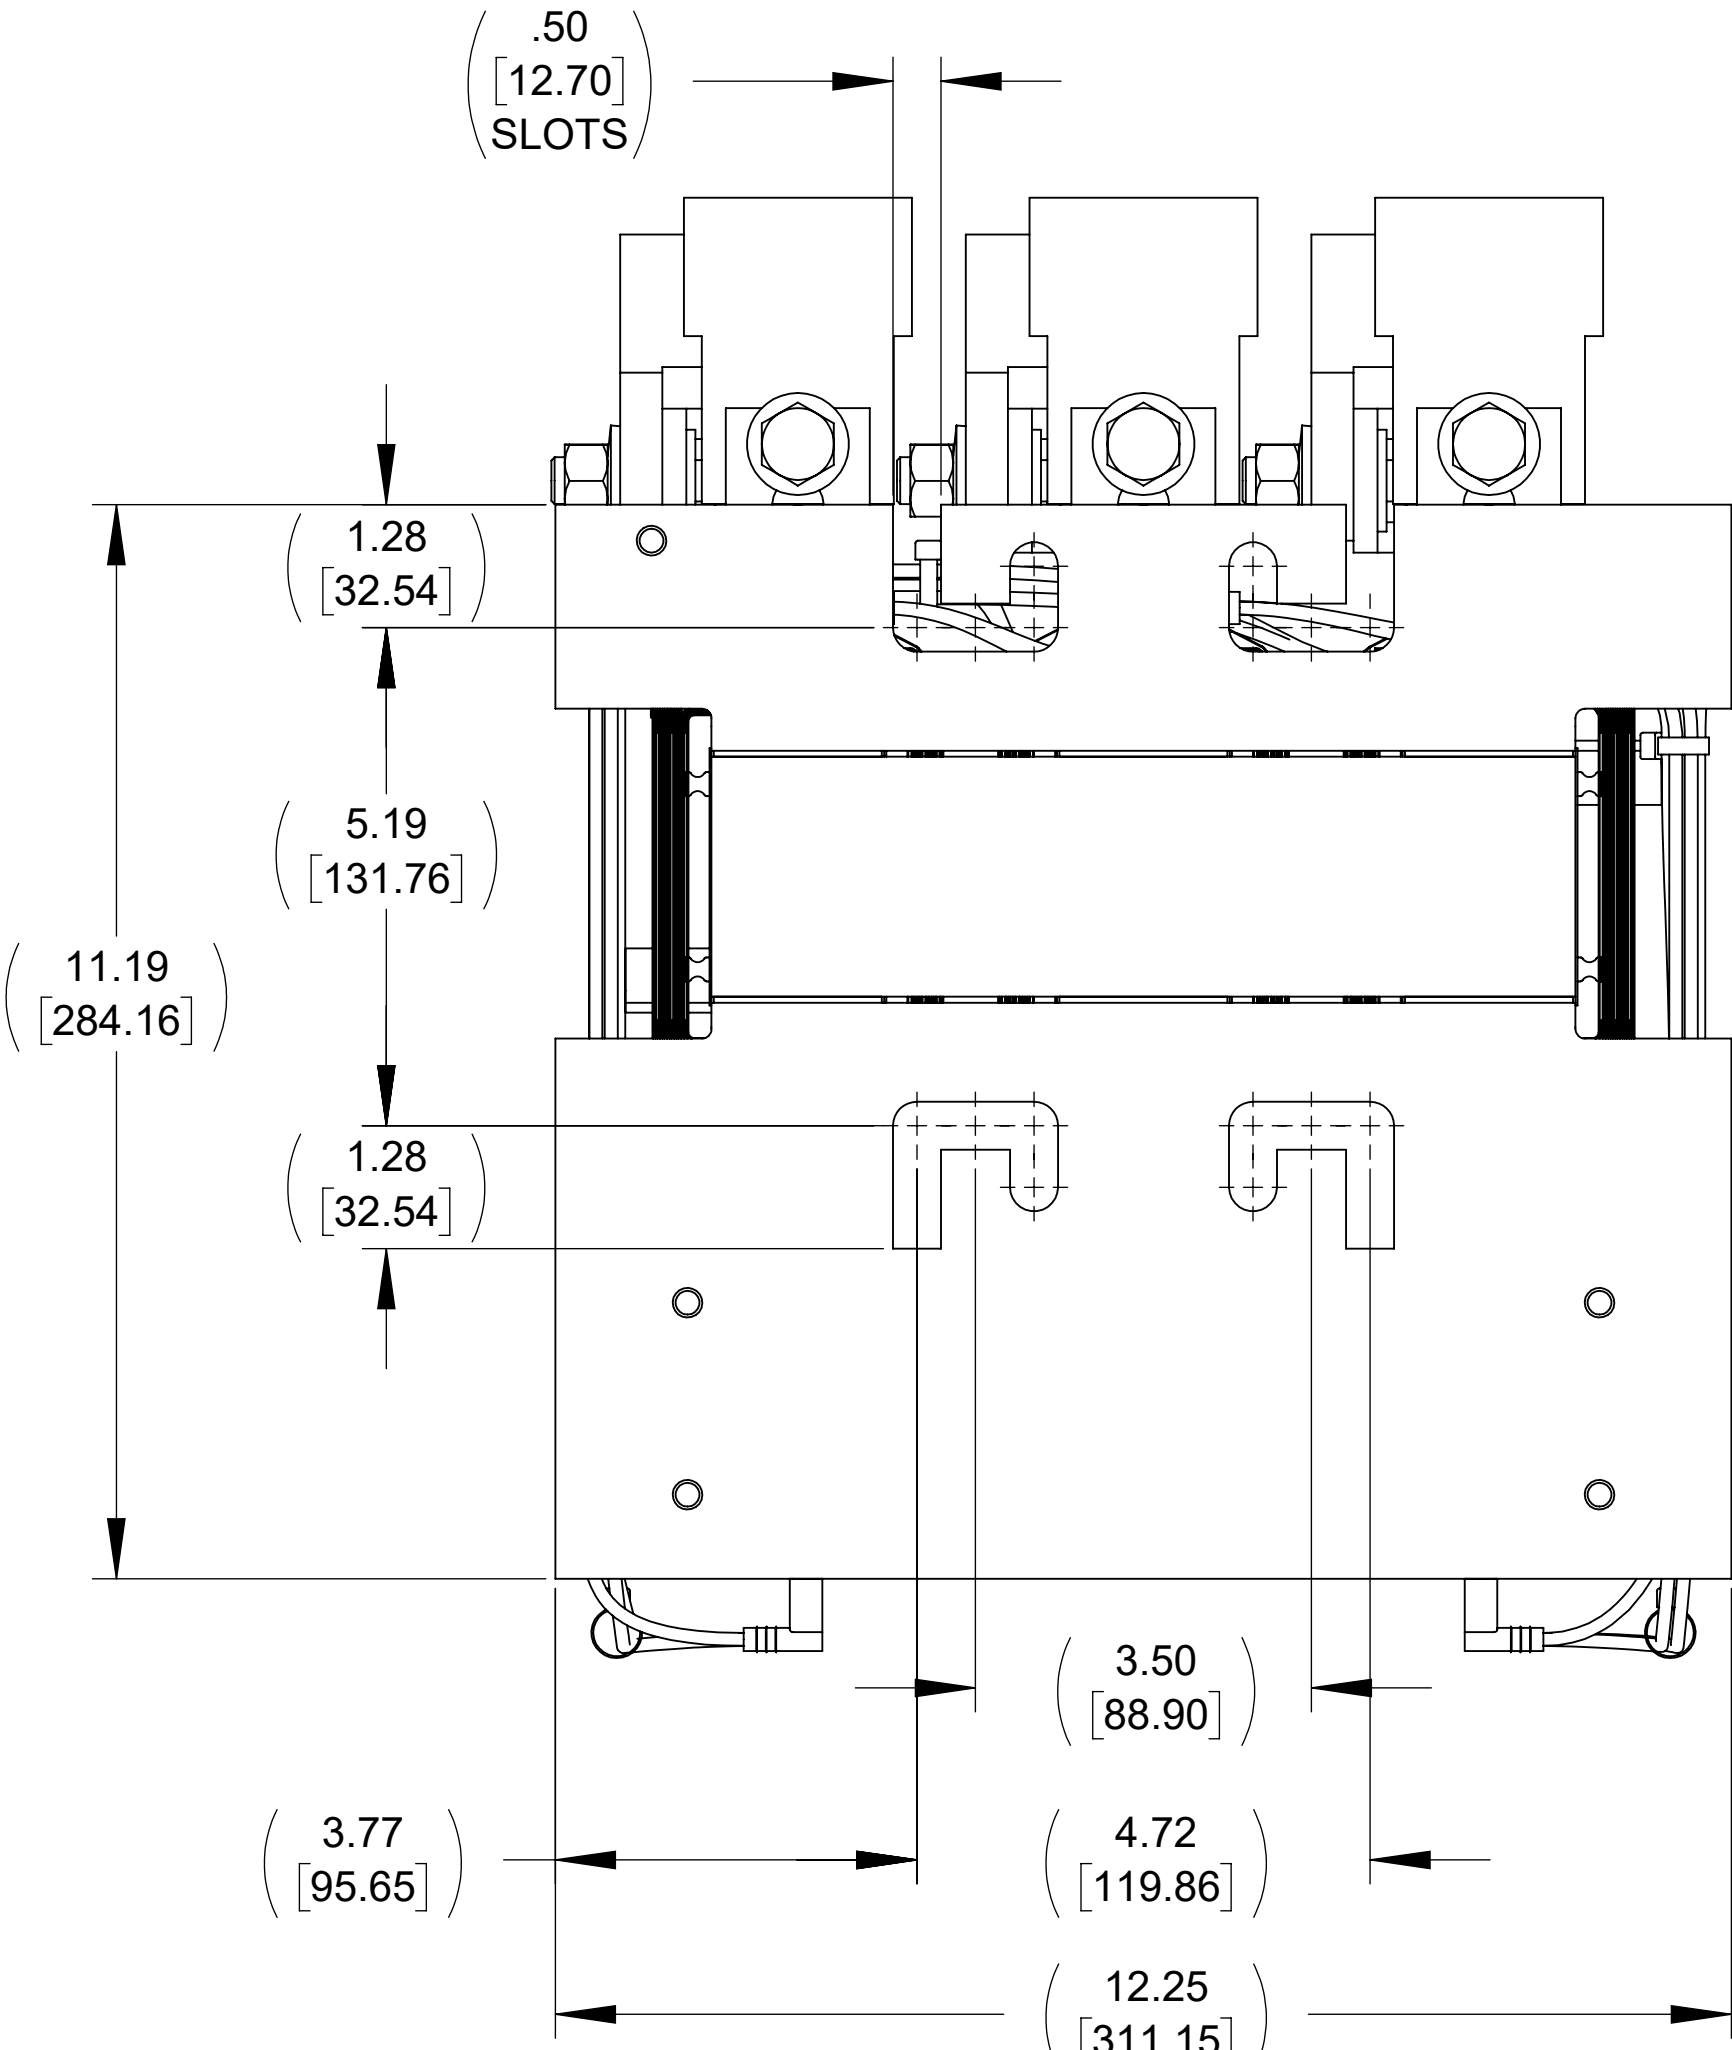


BOTTOM VIEW

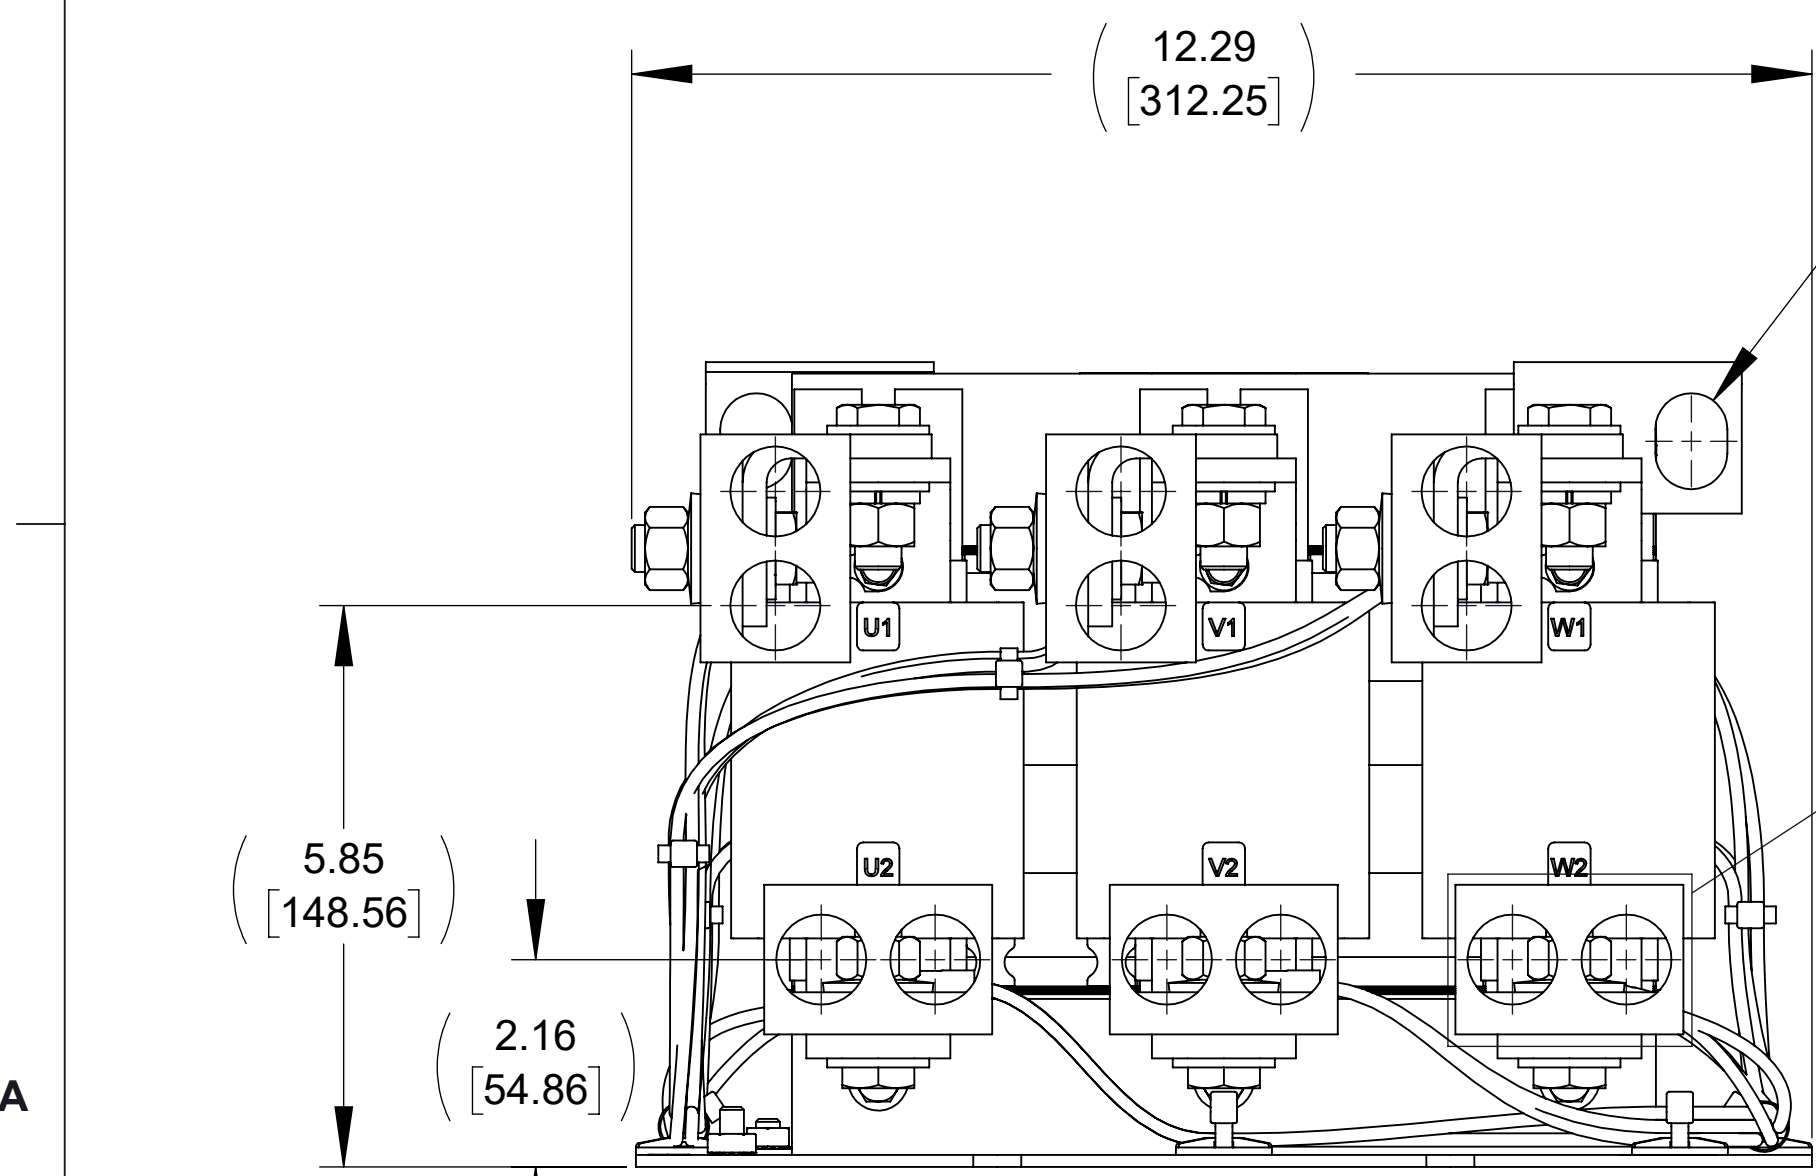



FRONT VIEW

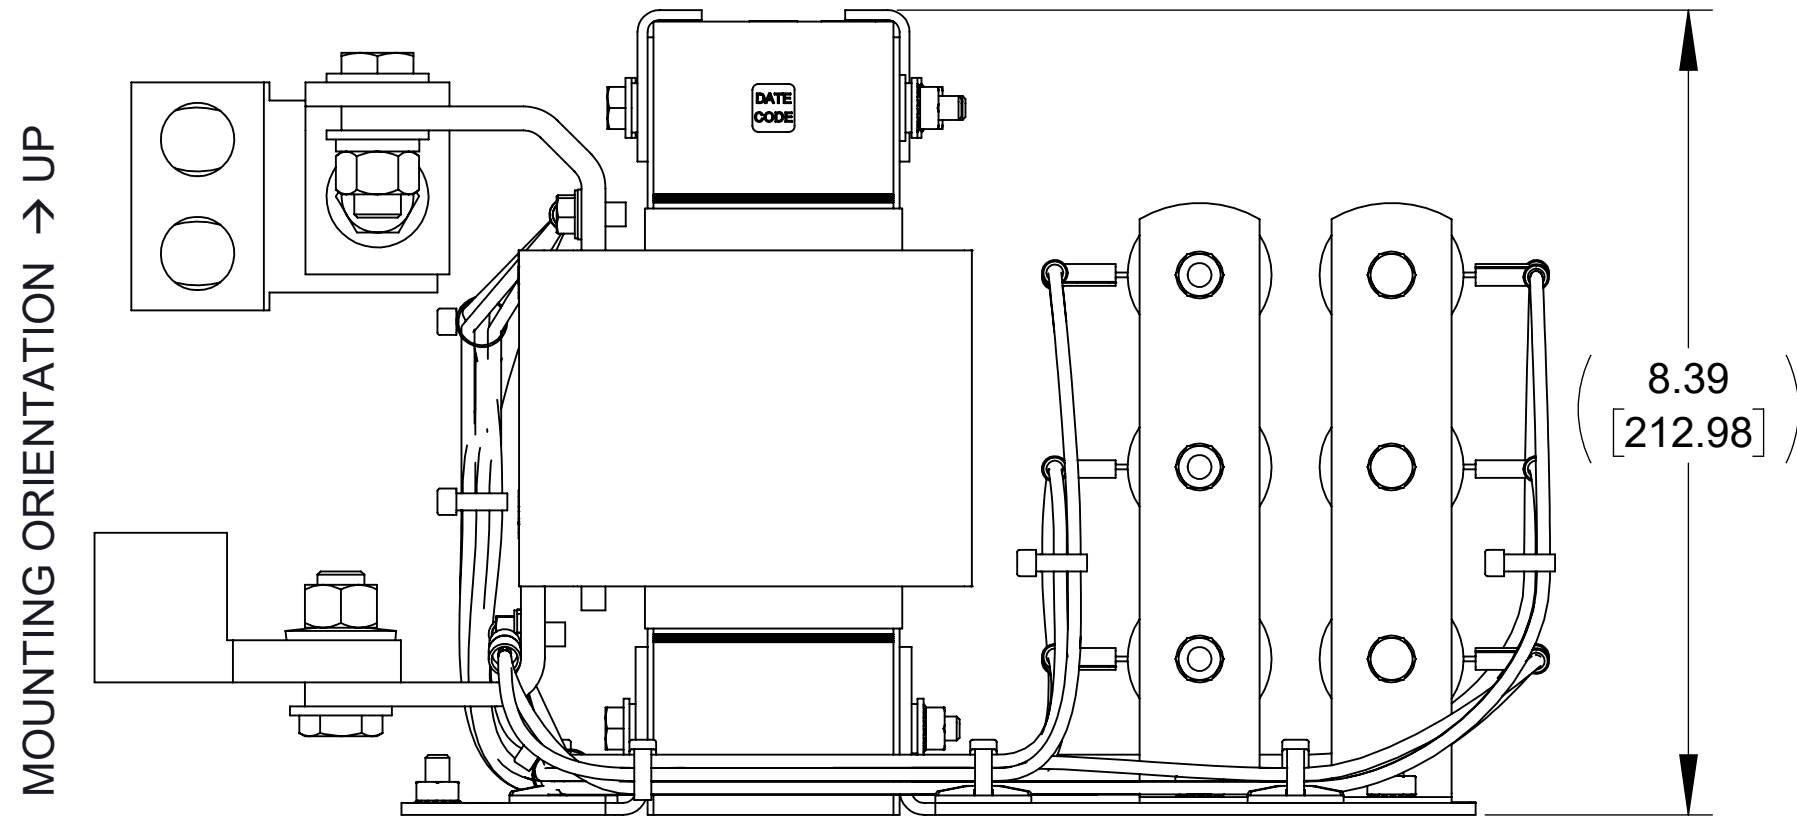

SIDE VIEW

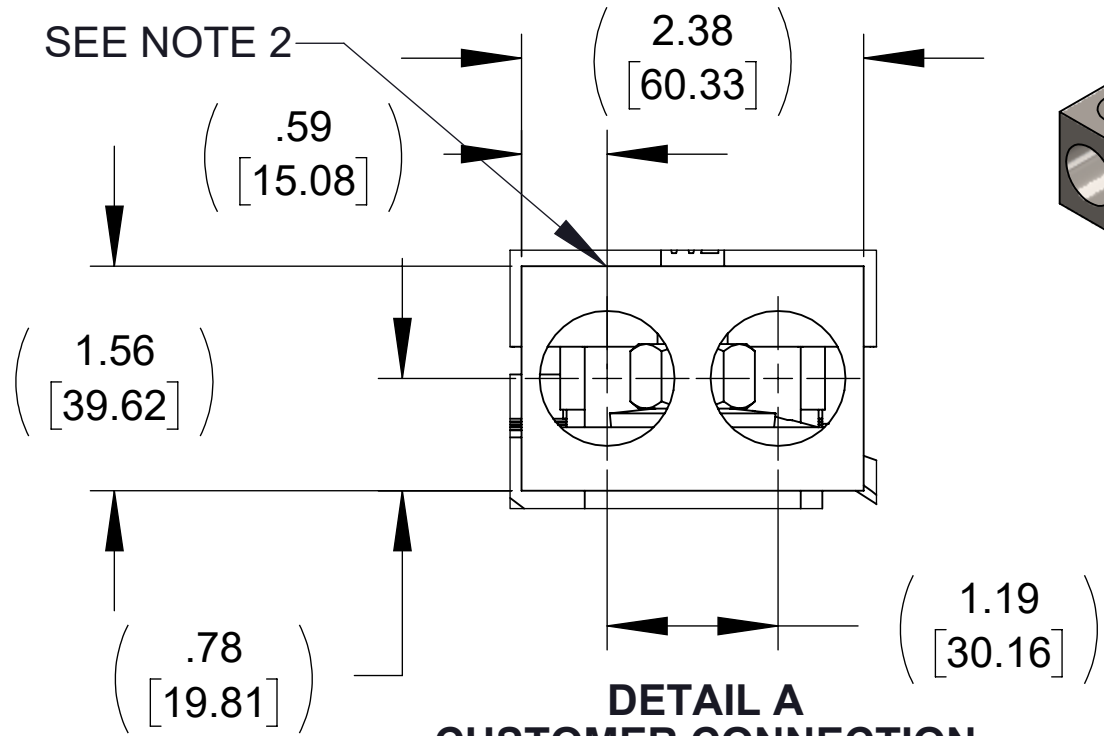

DETAIL A  
CUSTOMER CONNECTION  
LUG DETAIL  
SEE NOTES 1&2  
(6 PLACES)

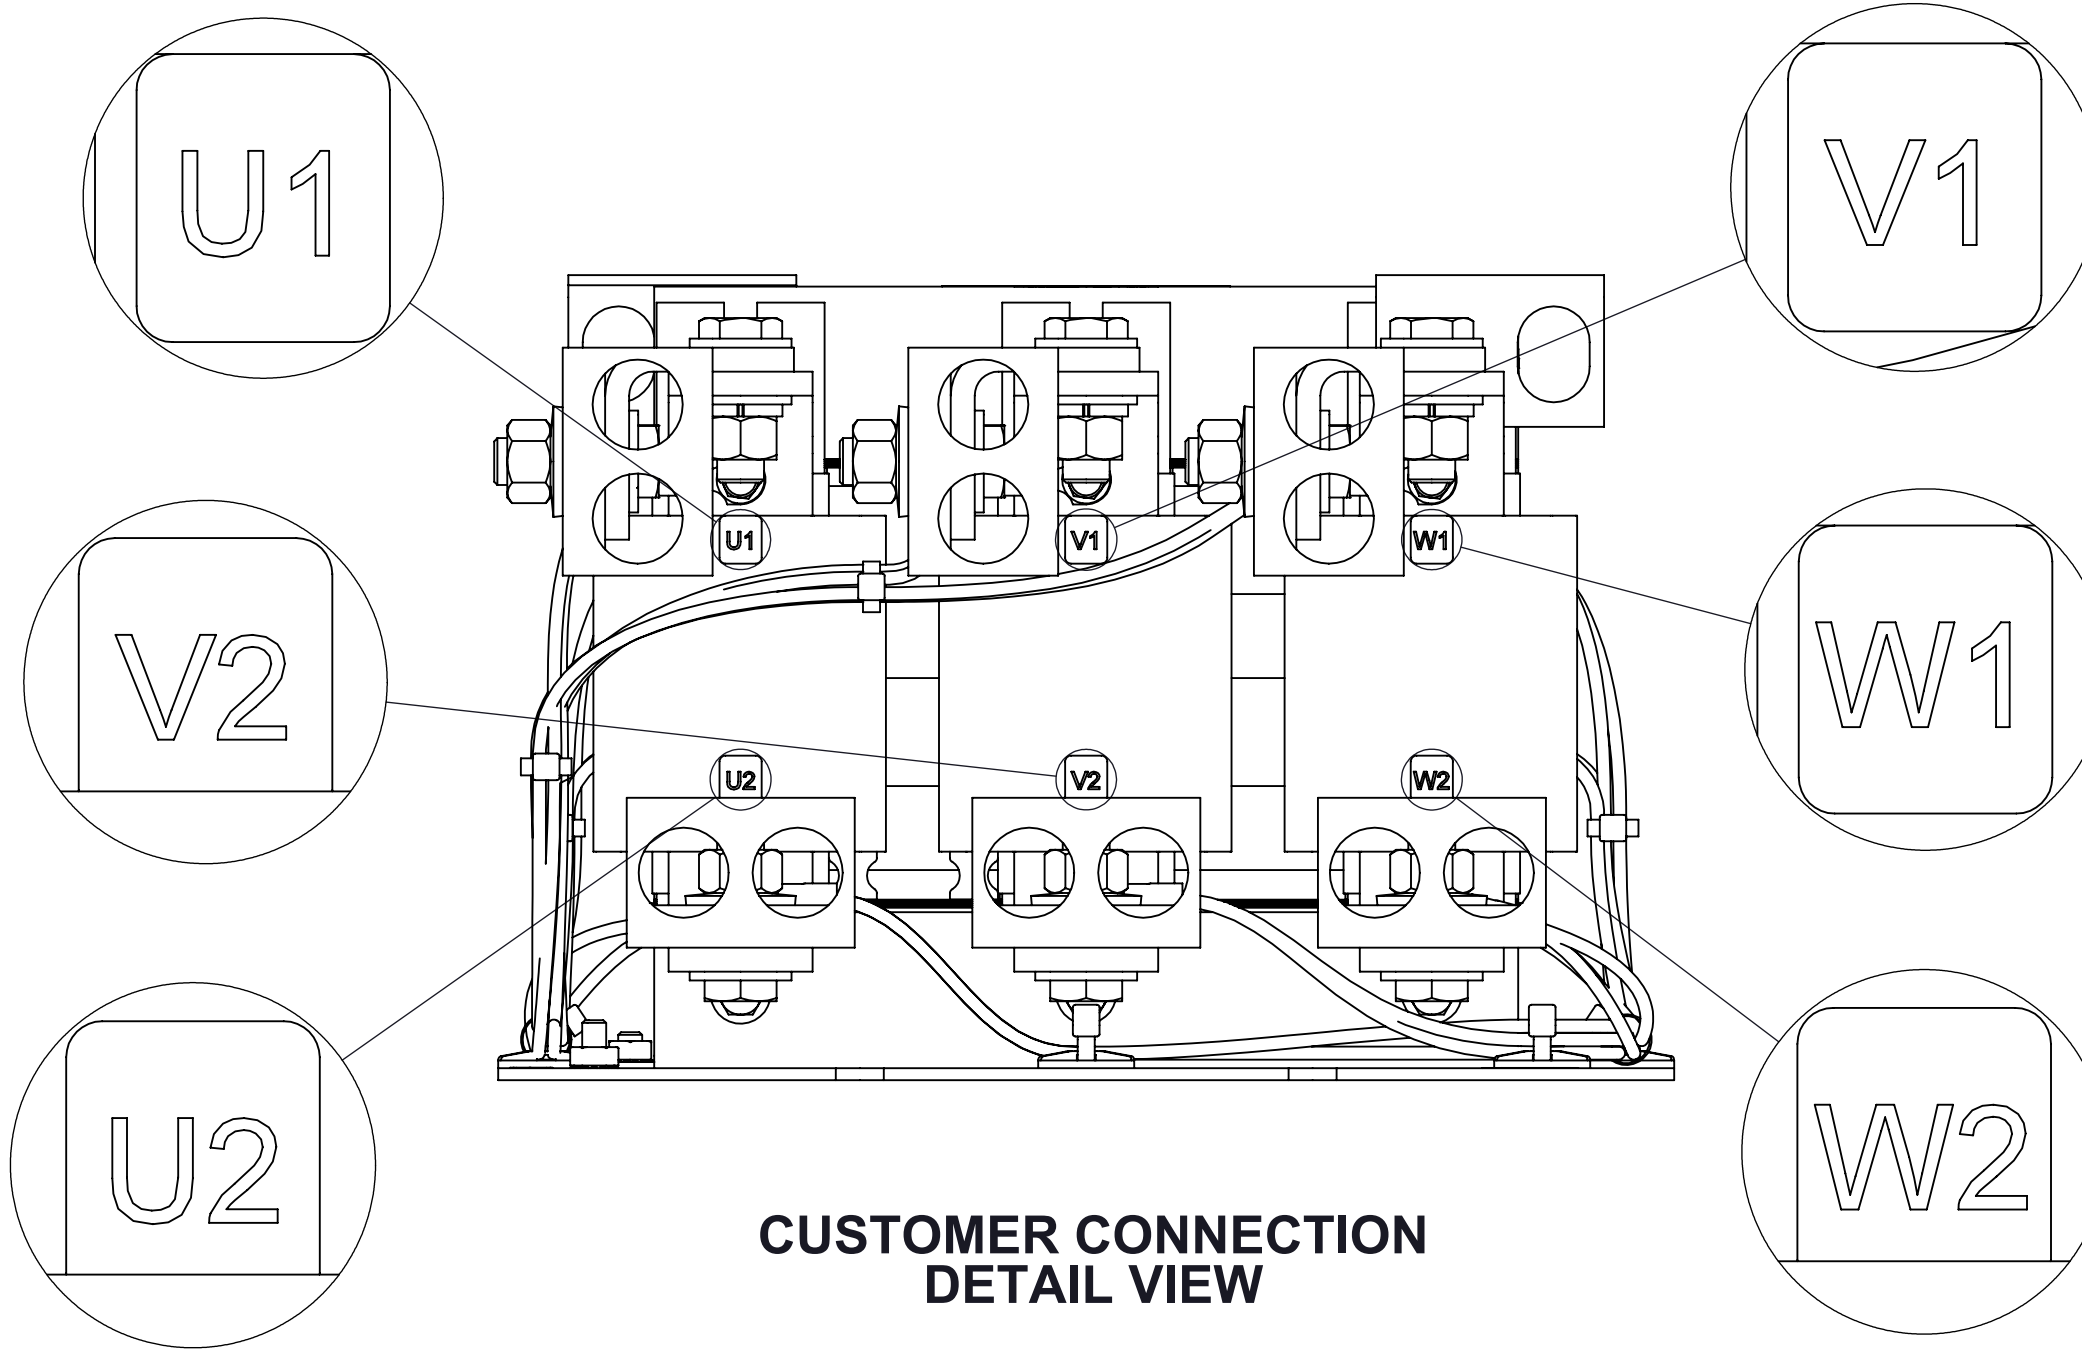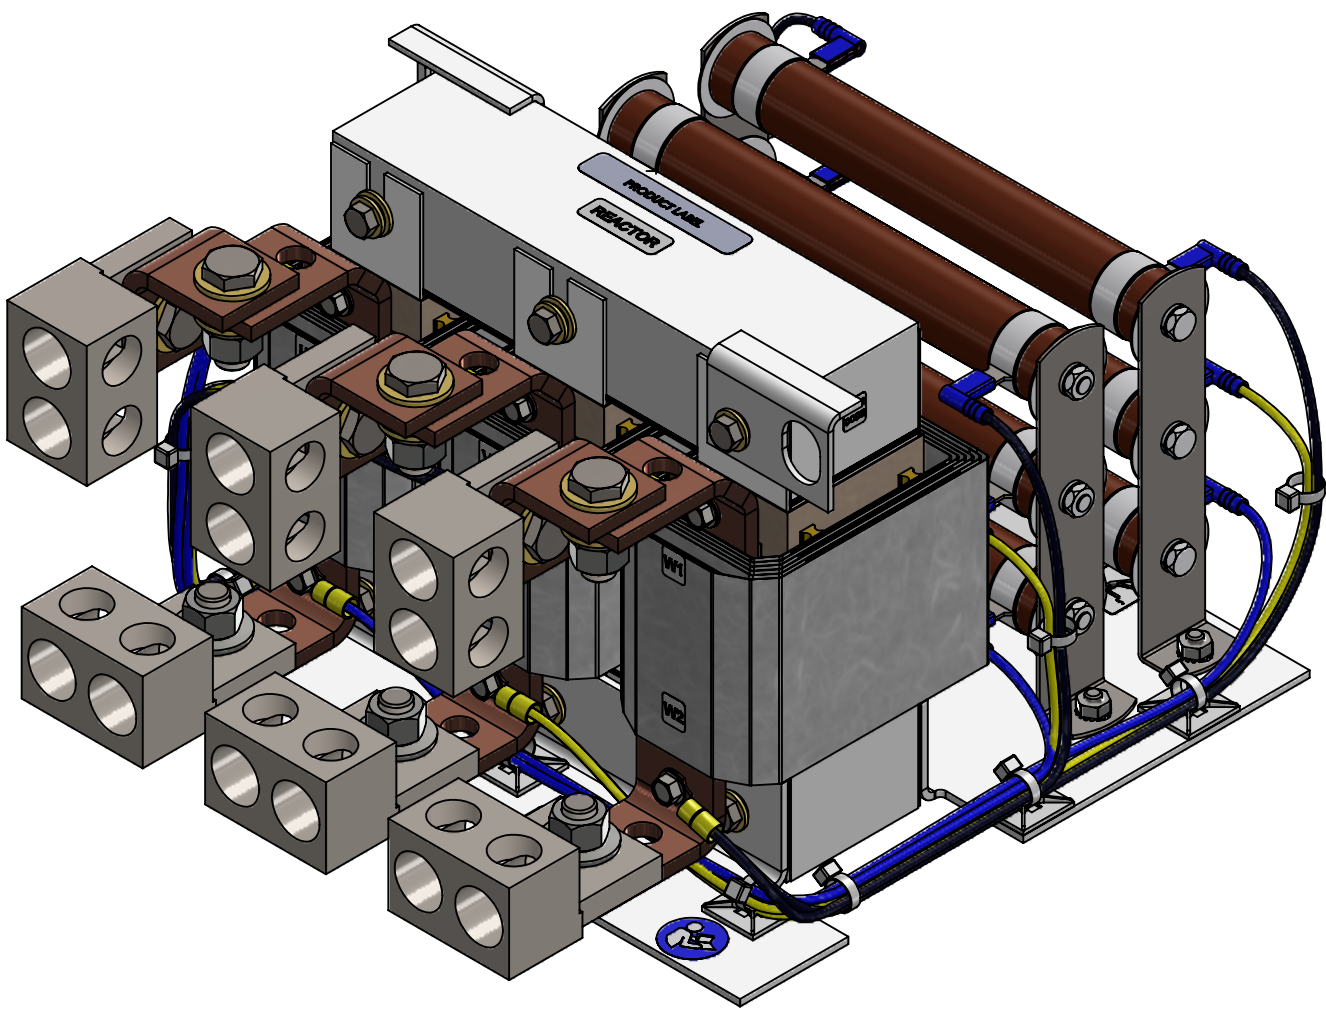

CUSTOMER CONNECTION  
DETAIL VIEW

NOTES:

1. TERMINAL WIRE RANGE: 2AWG-600KCMIL.
2. TERMINAL SCREW TIGHTENING TORQUE: 550 INLBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		DRAWN BY: MN	DATE 07/16/21	CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION		CHECKED BY: JD	DATE 11/19/21	DESCRIPTION  DVDT E SERIES 515A 208-600V 2-4kHz FILTER, OPEN PANEL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:  ANGLES: ± 1 °  1 PLACE .X: ± .1 [2.5]  2 PLACE .XX: ± .03 [0.76]  3 PLACE .XXX: ± .010 [0.254]		ME APPROVED BY: DP	DATE 11/20/21		
		RE APPROVED BY: PY	DATE 11/22/21	SIZE D	DWG No. CD DVTP0515E
				SCALE 1:2	REV 01
				Sheet1	
				SHEET 1 OF 1	

