APPROX. WEIGHT (LBS)
75

ECO No	DESCRIPTION	REV BY	DATE
M9248	UPDATE WITH CHANGES MADE AT ML LEVEL.	RT	08/06/14

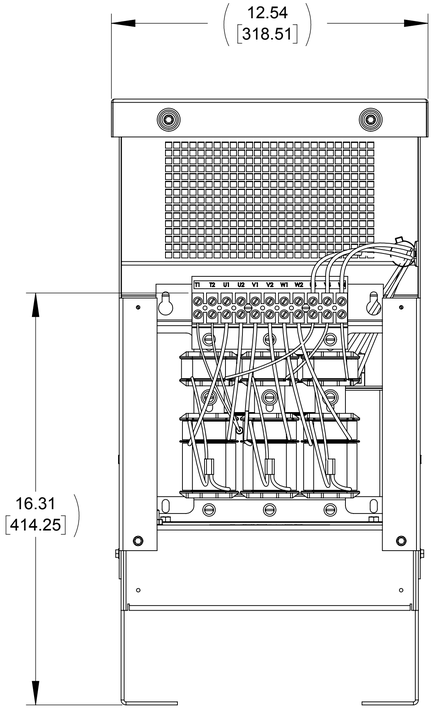

FRONT VIEW
(PANELS REMOVED)

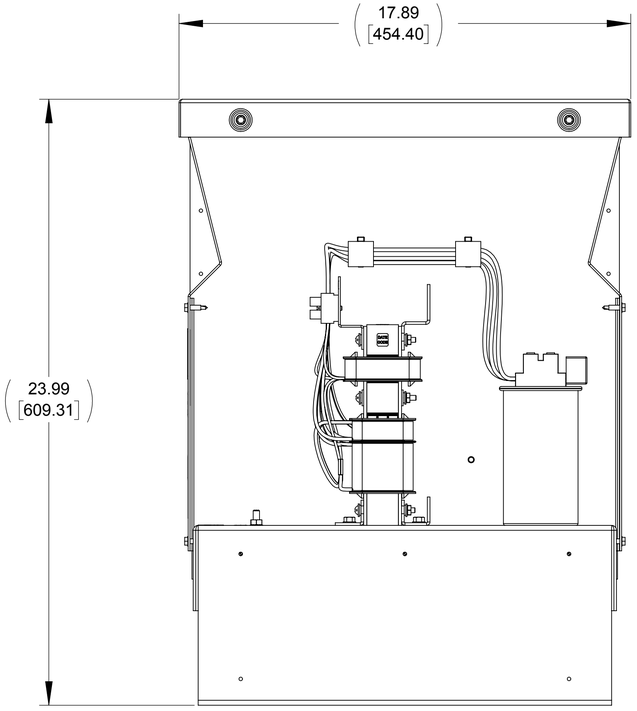

SIDE VIEW
(PANELS REMOVED)

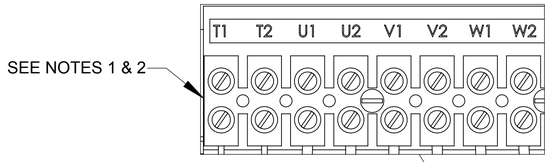

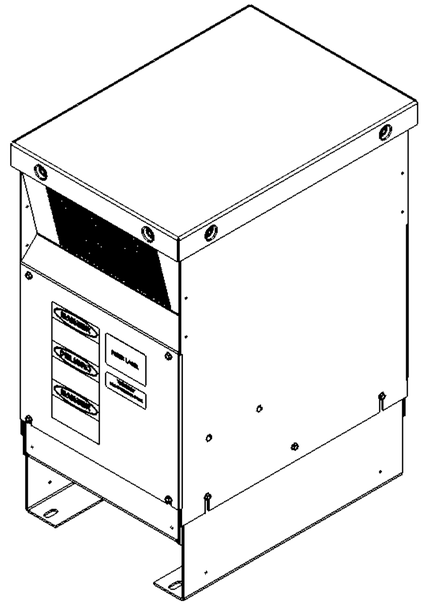

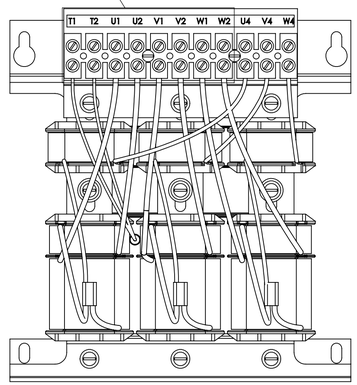

CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

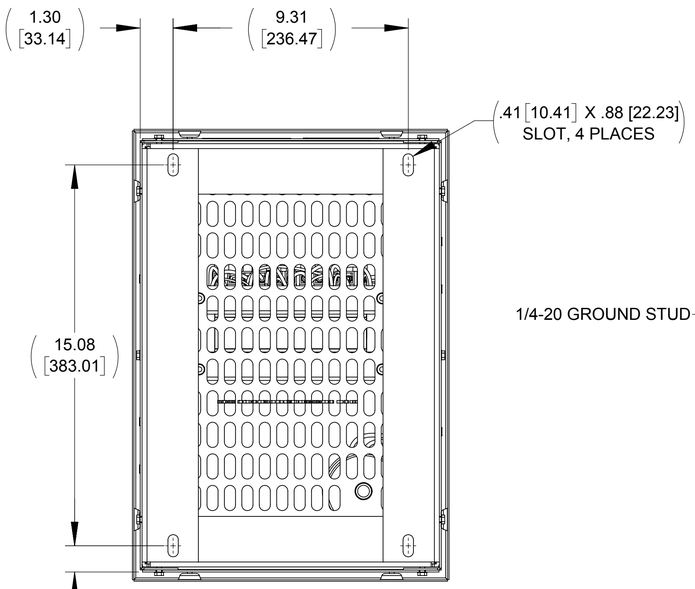

BOTTOM VIEW

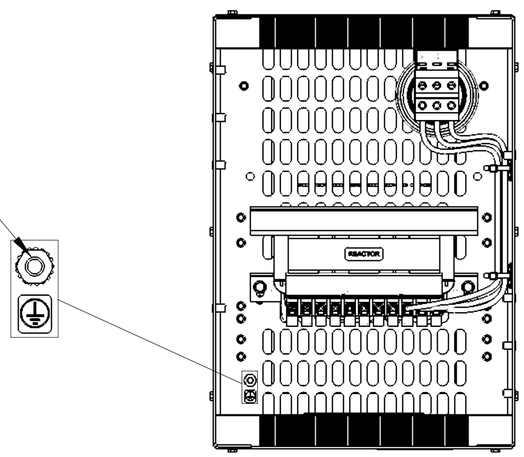

TOP VIEW
(PANELS REMOVED)

NOTES:

1. TERMINAL SCREW TIGHTENING TORQUE: 16 IN\LBS, MAX.
2. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
AN EL POWER ELECTRONICS COMPANY
N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN: JP	DATE: 05/03/12
CHECKED: RH	DATE: 08/11/14
APPROVED: RH	DATE: 08/11/14

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

MATRIX AP 11A 480V 60HZ
NEMA 1/2 ENCLOSURE

SIZE	DWG No	REV
D	CD MAPG0011D	02

SCALE 1:3 SHEET 1 OF 1