

APPROX. WEIGHT
(LBS)
738


ECO No	DESCRIPTION	REV BY	DATE
M12784	UPDATE TO MODIFIED CAB-26APD & UPDATE FORMAT	MN	03/25/20

D


C

B


A

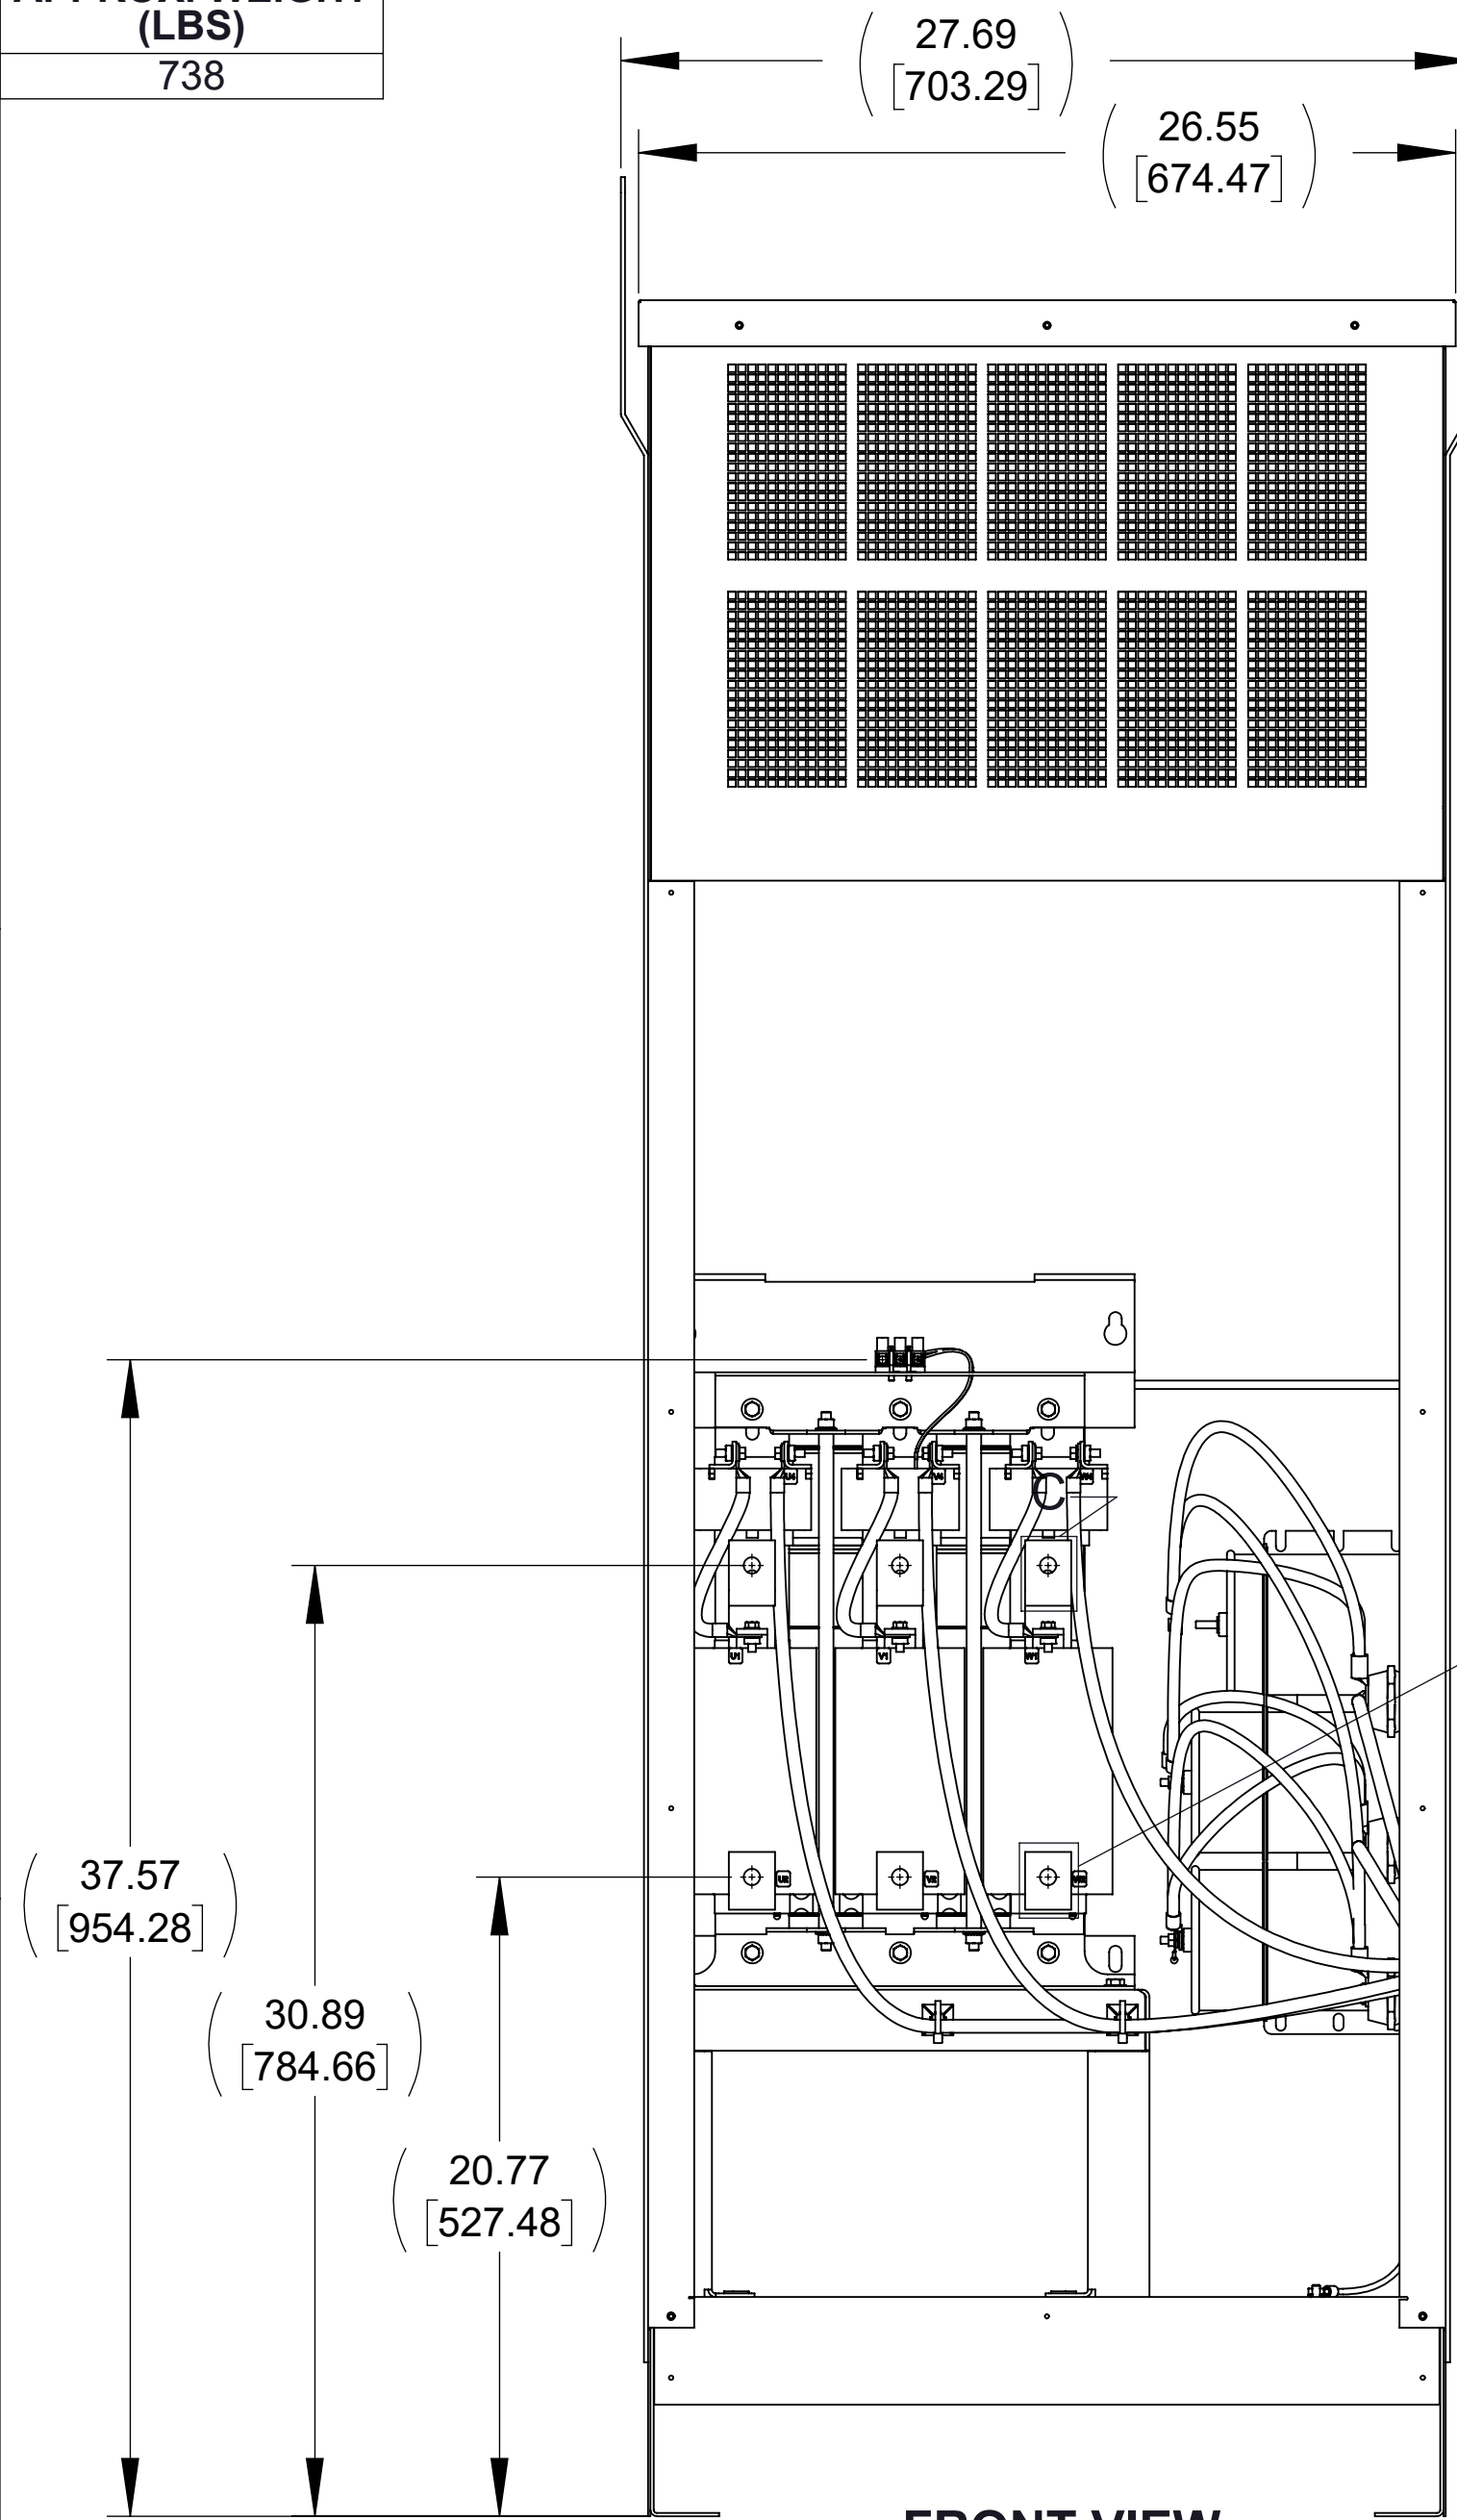


FRONT VIEW
(PANELS REMOVED)

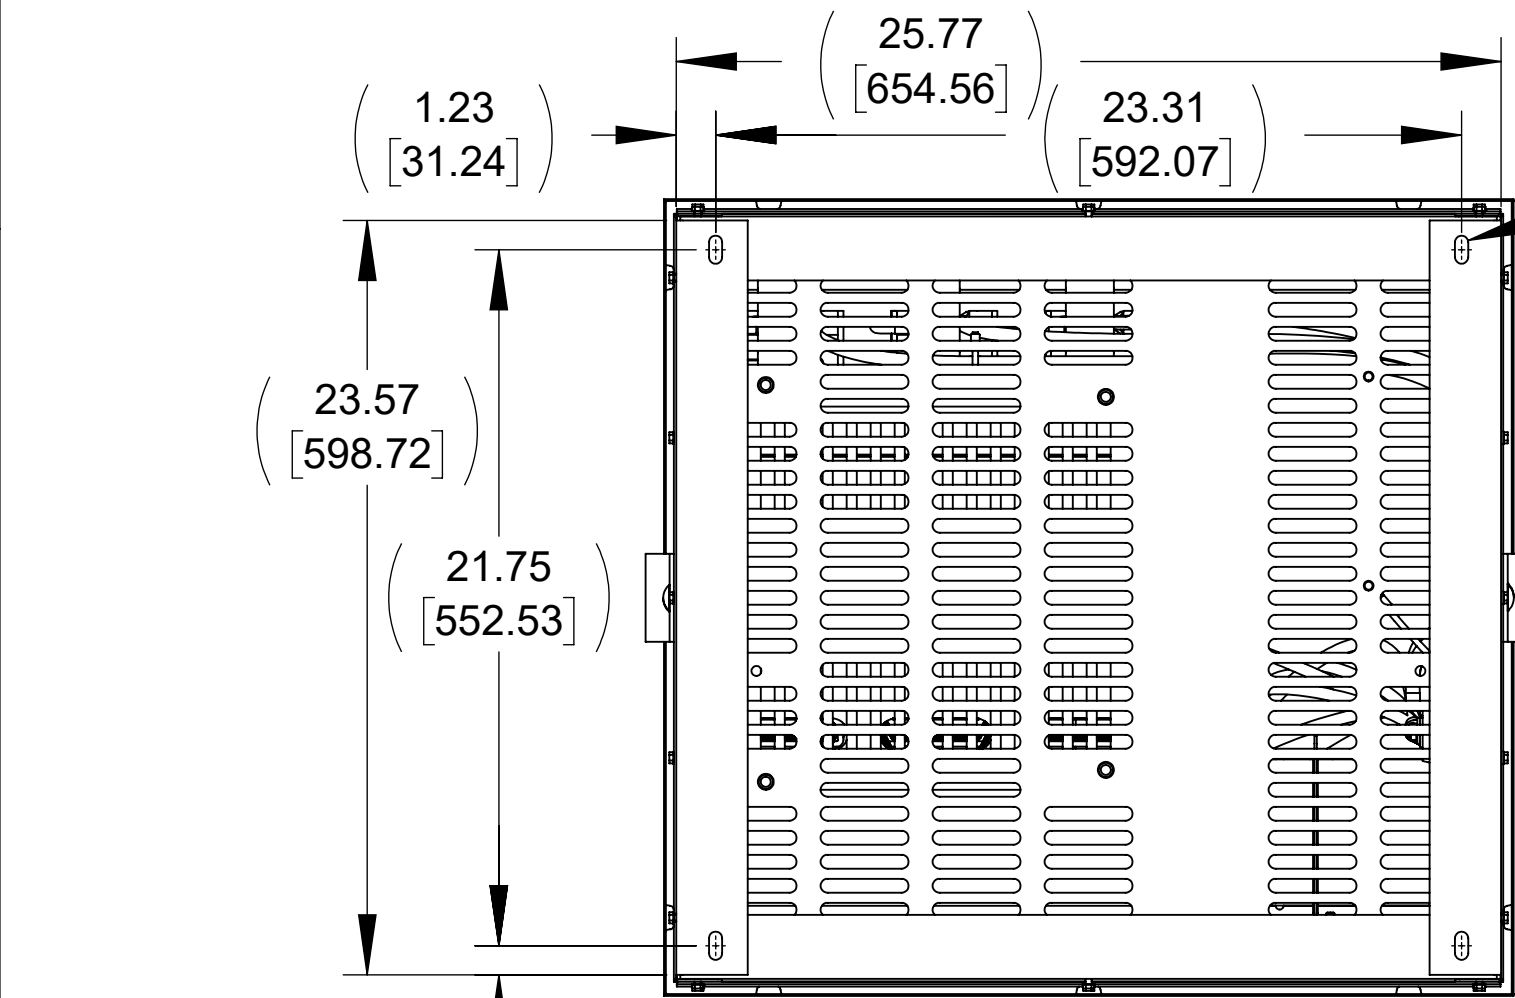

BOTTOM VIEW

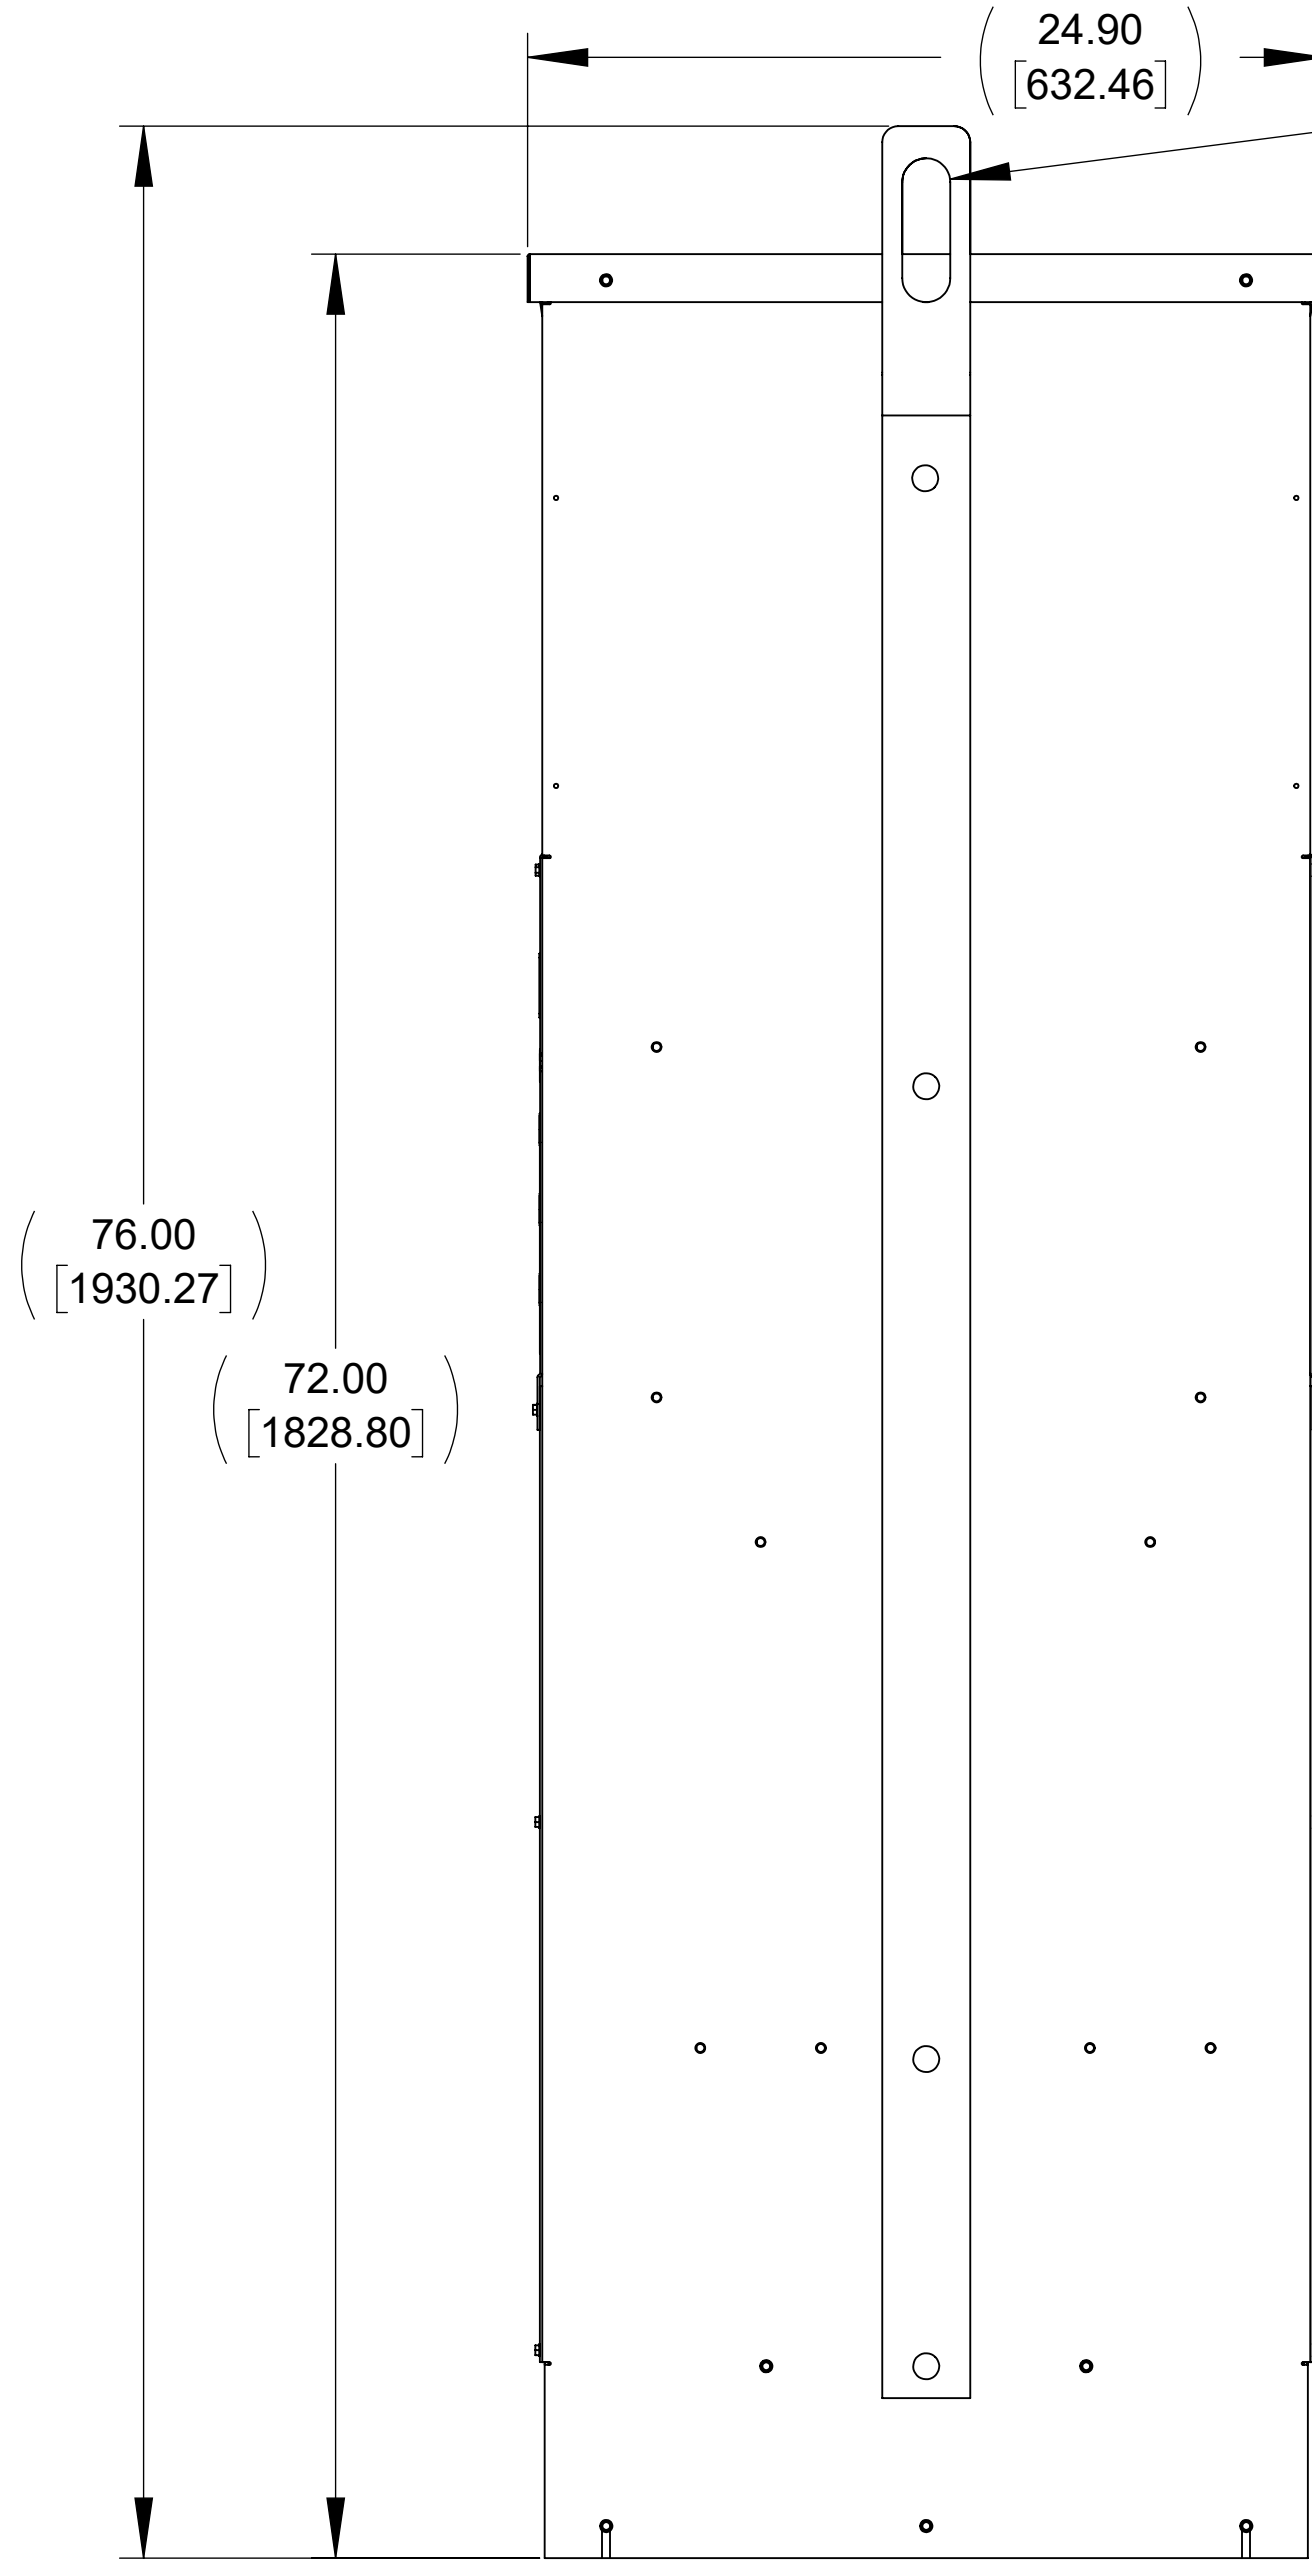


SIDE VIEW

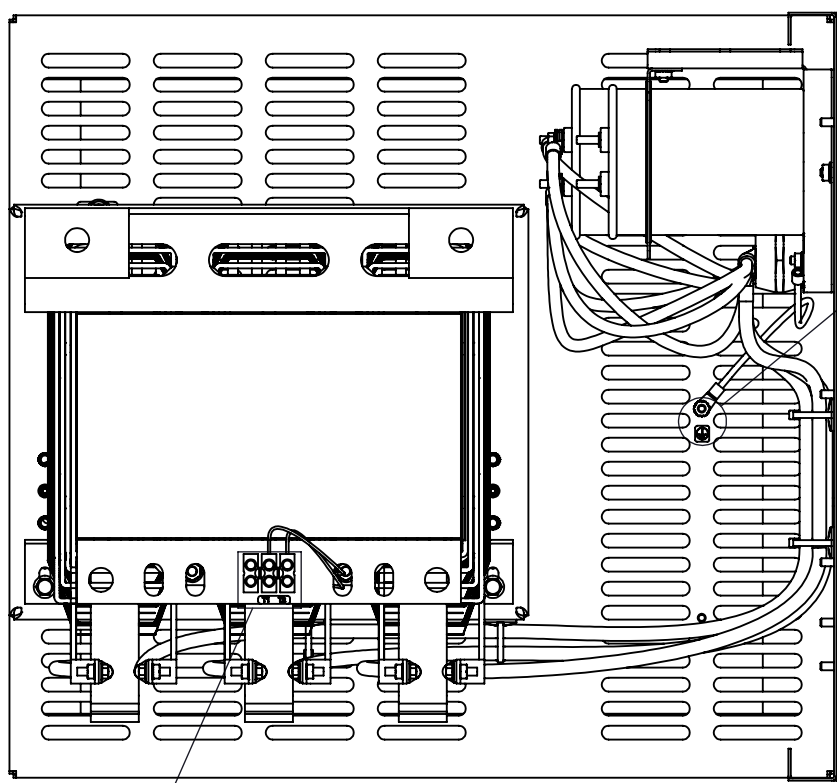


TOP VIEW
(PANELS REMOVED)


(ϕ 1.50 [38.10] X 4.50 [114.30])
SLOT, 2 PLACES

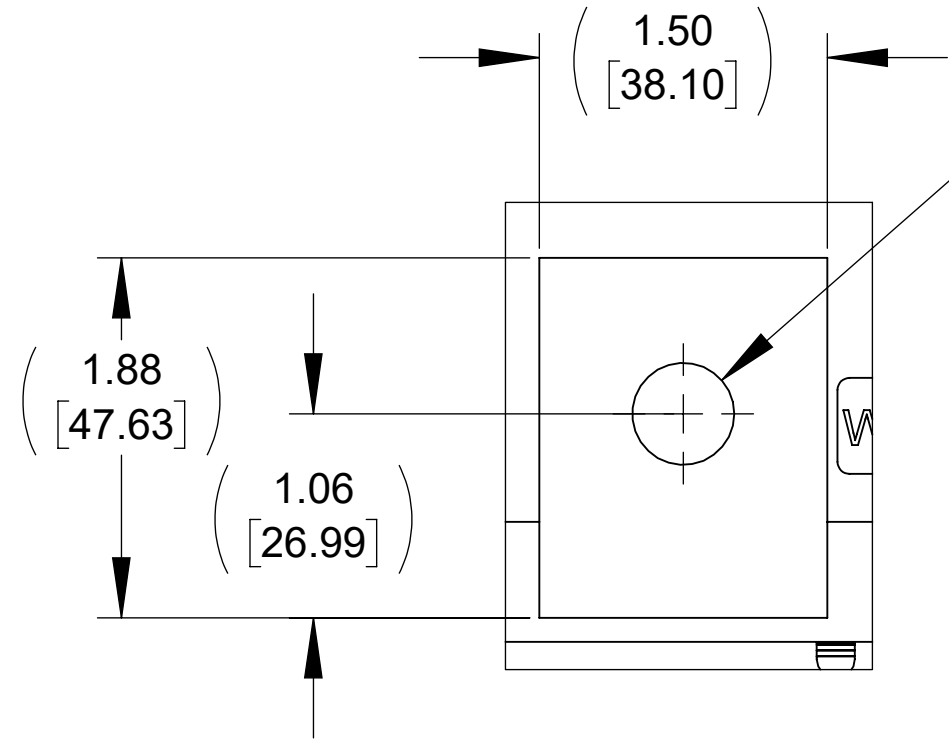


DETAIL A
(3 PLACES)

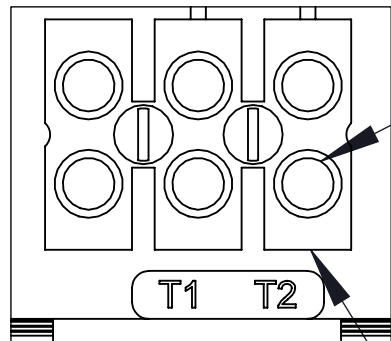


DETAIL B
CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

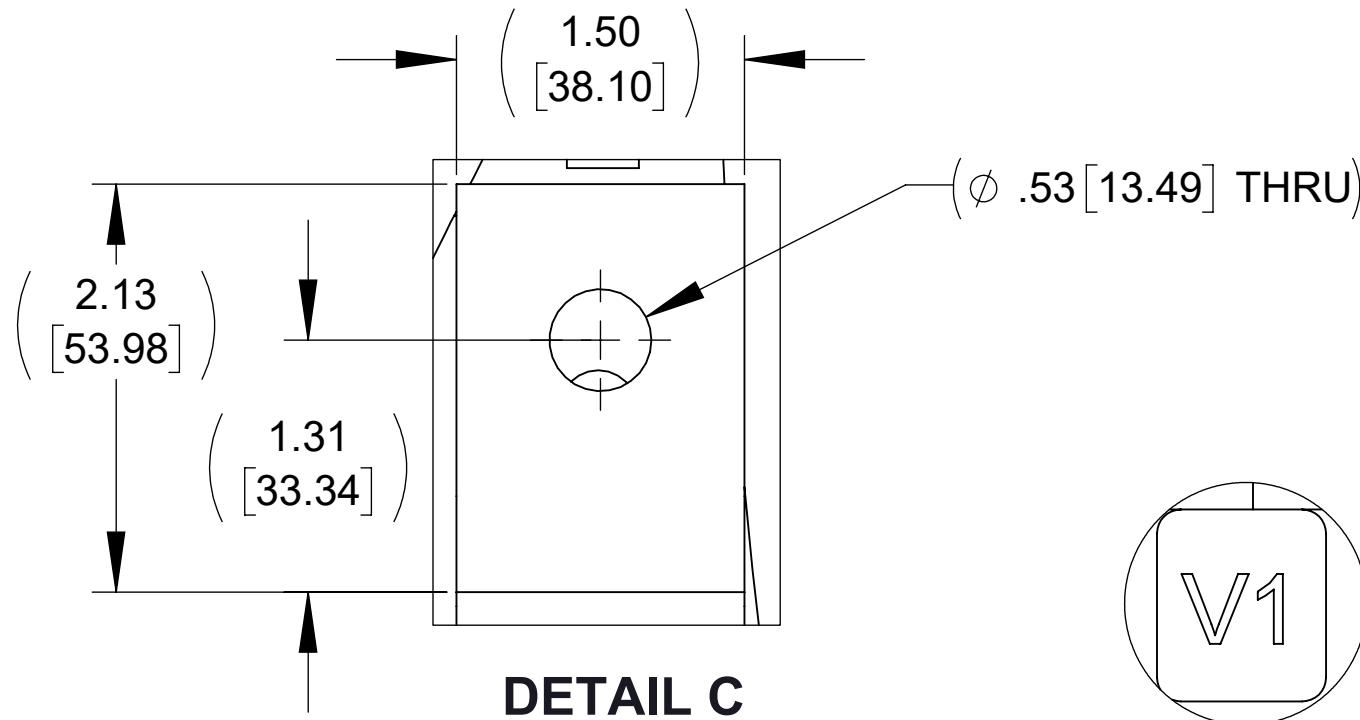

DETAIL C
(3 PLACES)

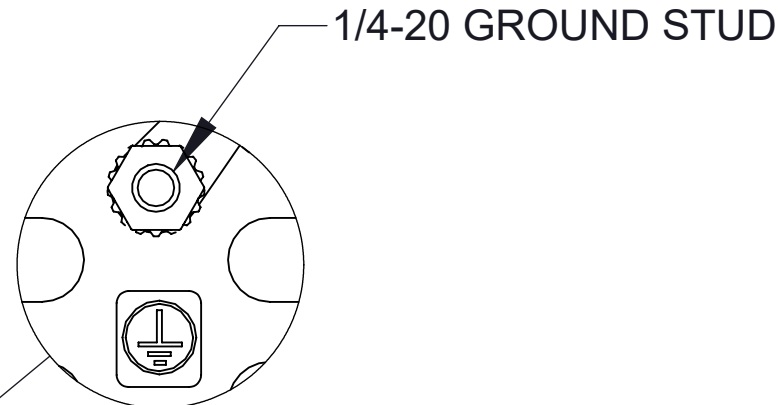


DETAIL D

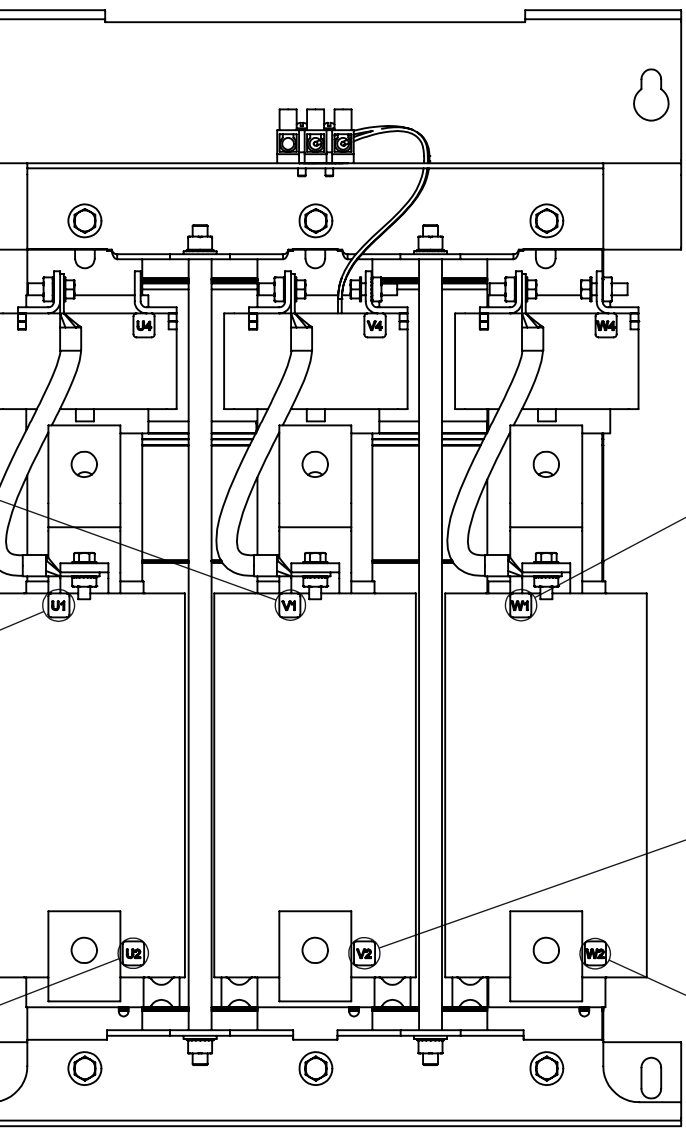

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN.LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		 N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200		MATRIX AP 320A 600V 60HZ FILTER, NEMA 1/2 ENCL		
		DRAWN SU	DATE 05/13/13	SIZE D	DWG No. CD MAPG0320E	REV 06
		CHECKED MN	DATE 03/25/20			
		APPROVED PY	DATE 03/26/20	SCALE 1:6	SHEET 1 OF 1	