APPROX. WEIGHT (LBS)
60

ECO No	DESCRIPTION	REV BY	DATE
M9251	UPDATE TO REFLECT CHANGES MADE AT ML LEVEL.	RT	08/11/14

TOP VIEW

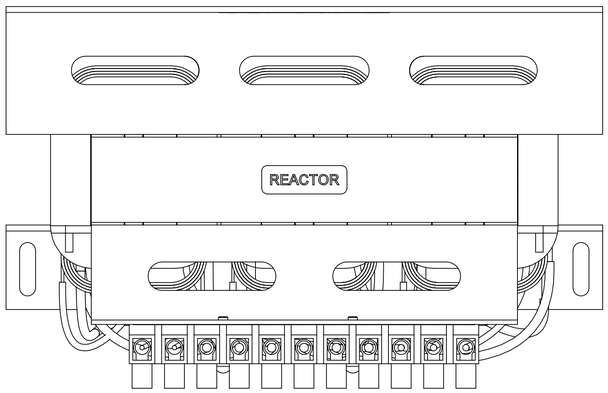

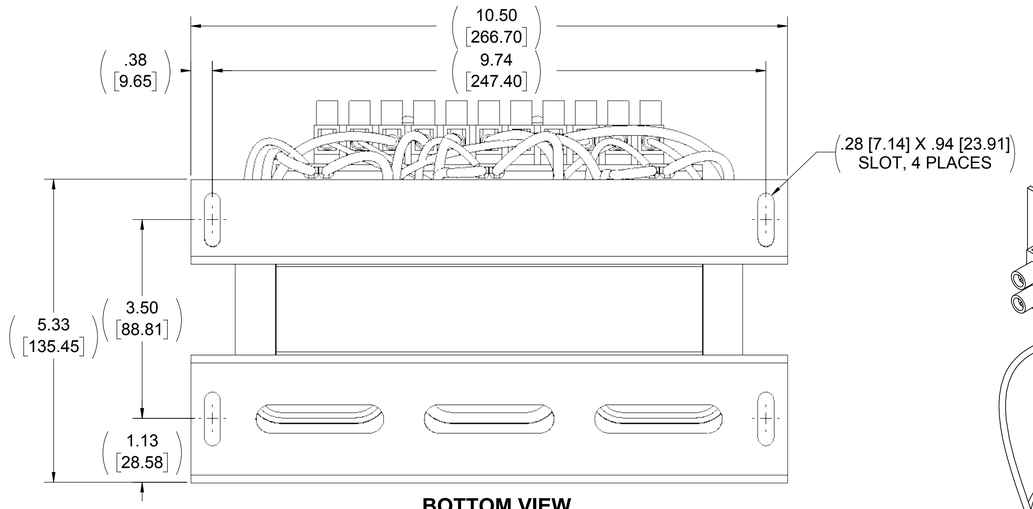

BOTTOM VIEW

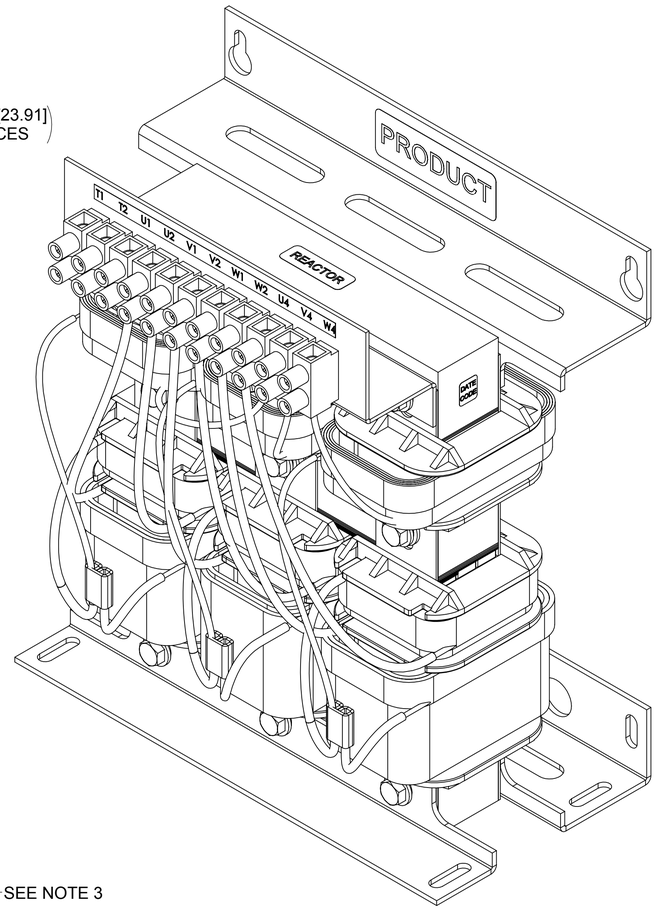

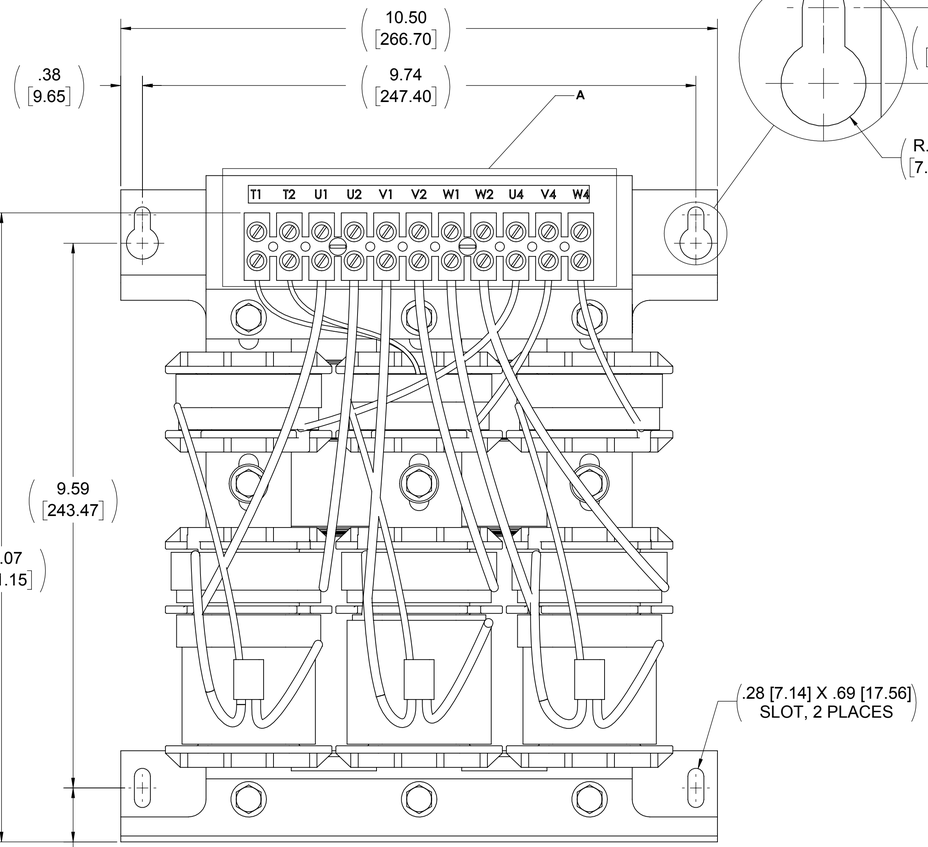

FRONT VIEW



RIGHT SIDE VIEW

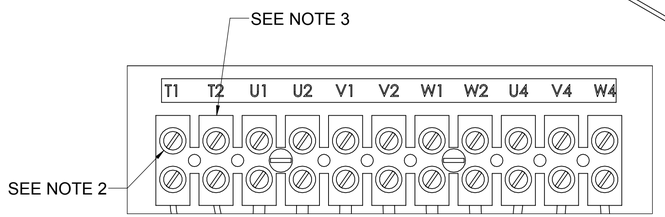

CUSTOMER CONNECTION DETAIL VIEW

NOTES:

1. FILTER REQUIRES CAPACITOR (CAP-364TP) (QTY. 1).
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
AN SL POWER ELECTRONICS COMPANY
N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN JS	DATE 04/03/13
CHECKED RH	DATE 08/11/14
APPROVED RH	DATE 08/11/14

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

MATRIX AP 14A 600V 60HZ
OPEN PANEL

SIZE	DWG No.	REV
D	CD MAPP0014E	04

SCALE 3:4 SHEET 1 OF 1