APPROX. WEIGHT (LBS)
1218

ECO No	DESCRIPTION	REV BY	DATE
M10043	UPDATE TO CURRENT DRAWING STANDARDS	SL	01/13/17

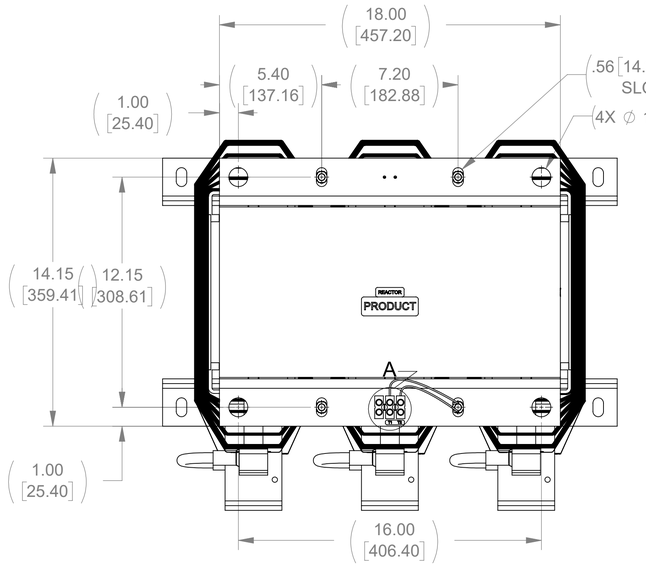

TOP VIEW

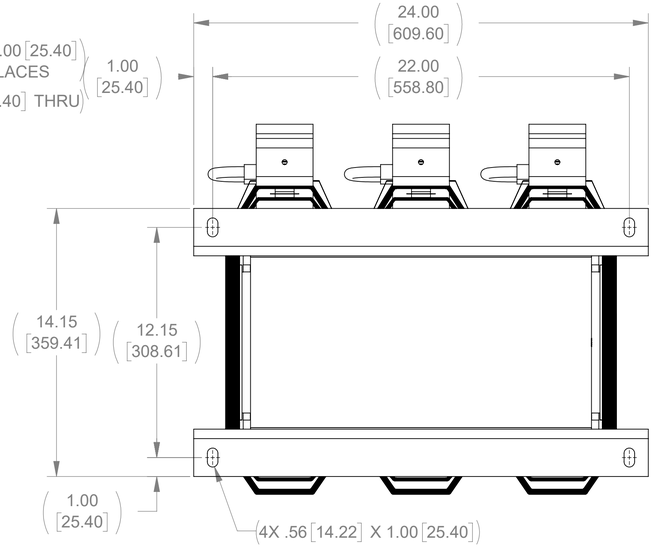

BOTTOM VIEW

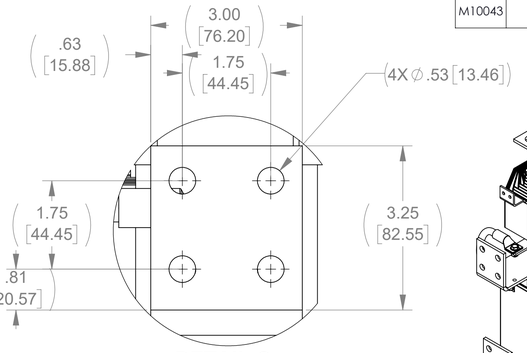

DETAIL C
(3 PLACES)

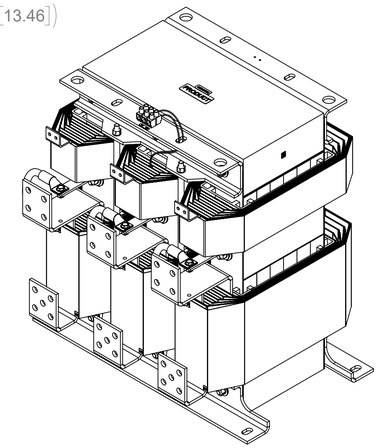

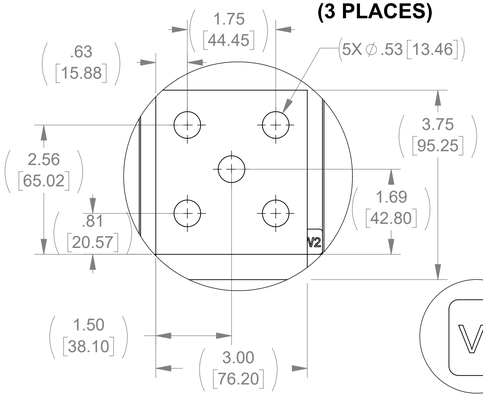

DETAIL D
(3 PLACES)



DETAIL A
CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

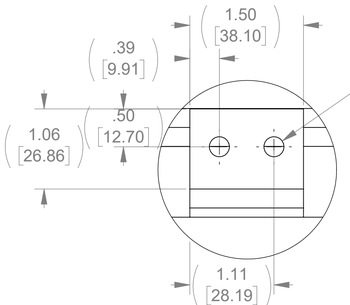

DETAIL B
(3 PLACES)

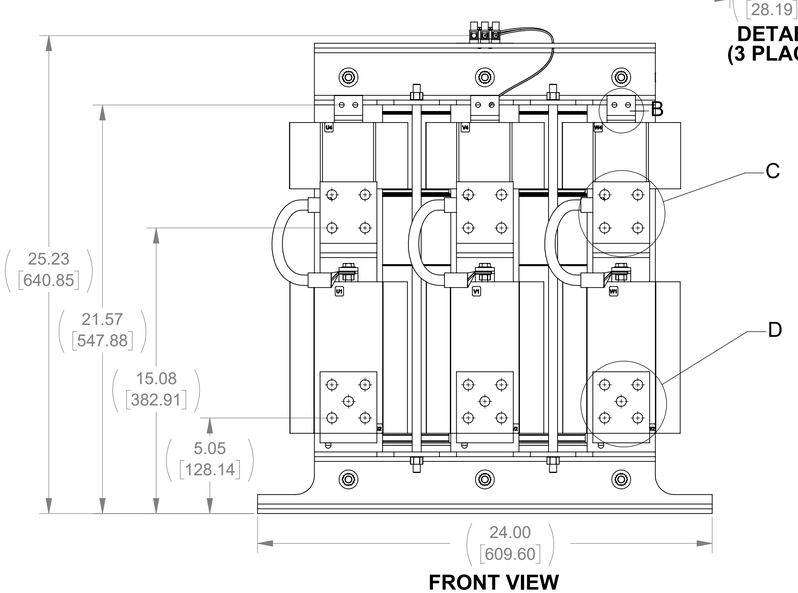

FRONT VIEW

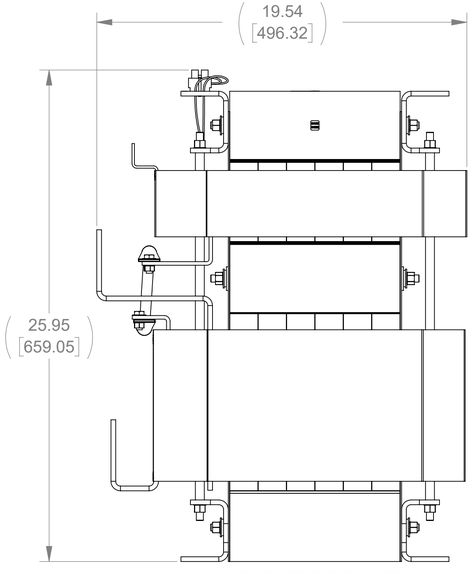

RIGHT SIDE VIEW

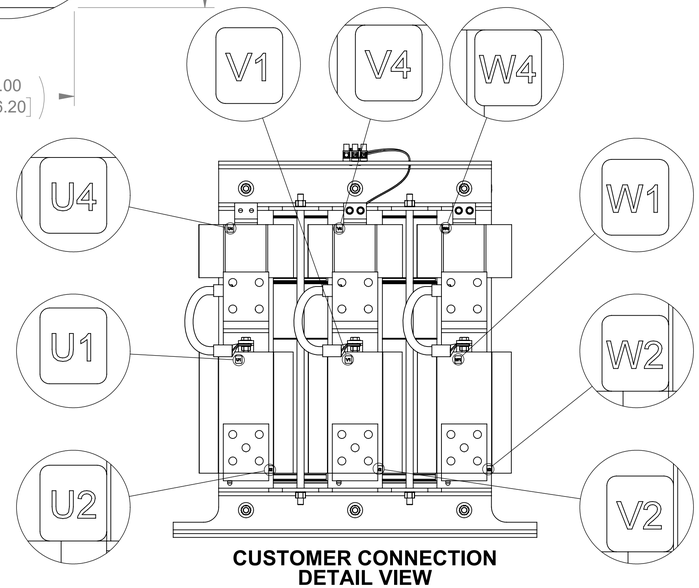

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:
1. FILTER REQUIRES CAPPANEL-578 (QTY 2).
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE POWER QUALITY SOLVED.

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN	DATE
JS	05/22/13
CHECKED	DATE
JM	01/13/17
APPROVED	DATE
JM	01/13/17

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

MATRIX AP 786A 600V 60HZ
OPEN PANEL

SIZE	DWG No.	REV
D	CD MAPP0786E	04

SCALE 1:4 SHEET 1 OF 1