

APPROX. WEIGHT (LBS)
106

ECO No	DESCRIPTION	REV BY	DATE
M9052	UPDATE TO CURRENT DRAWING STANDARDS	MN	03/19/14

D

C

B


A

D


C

B



A

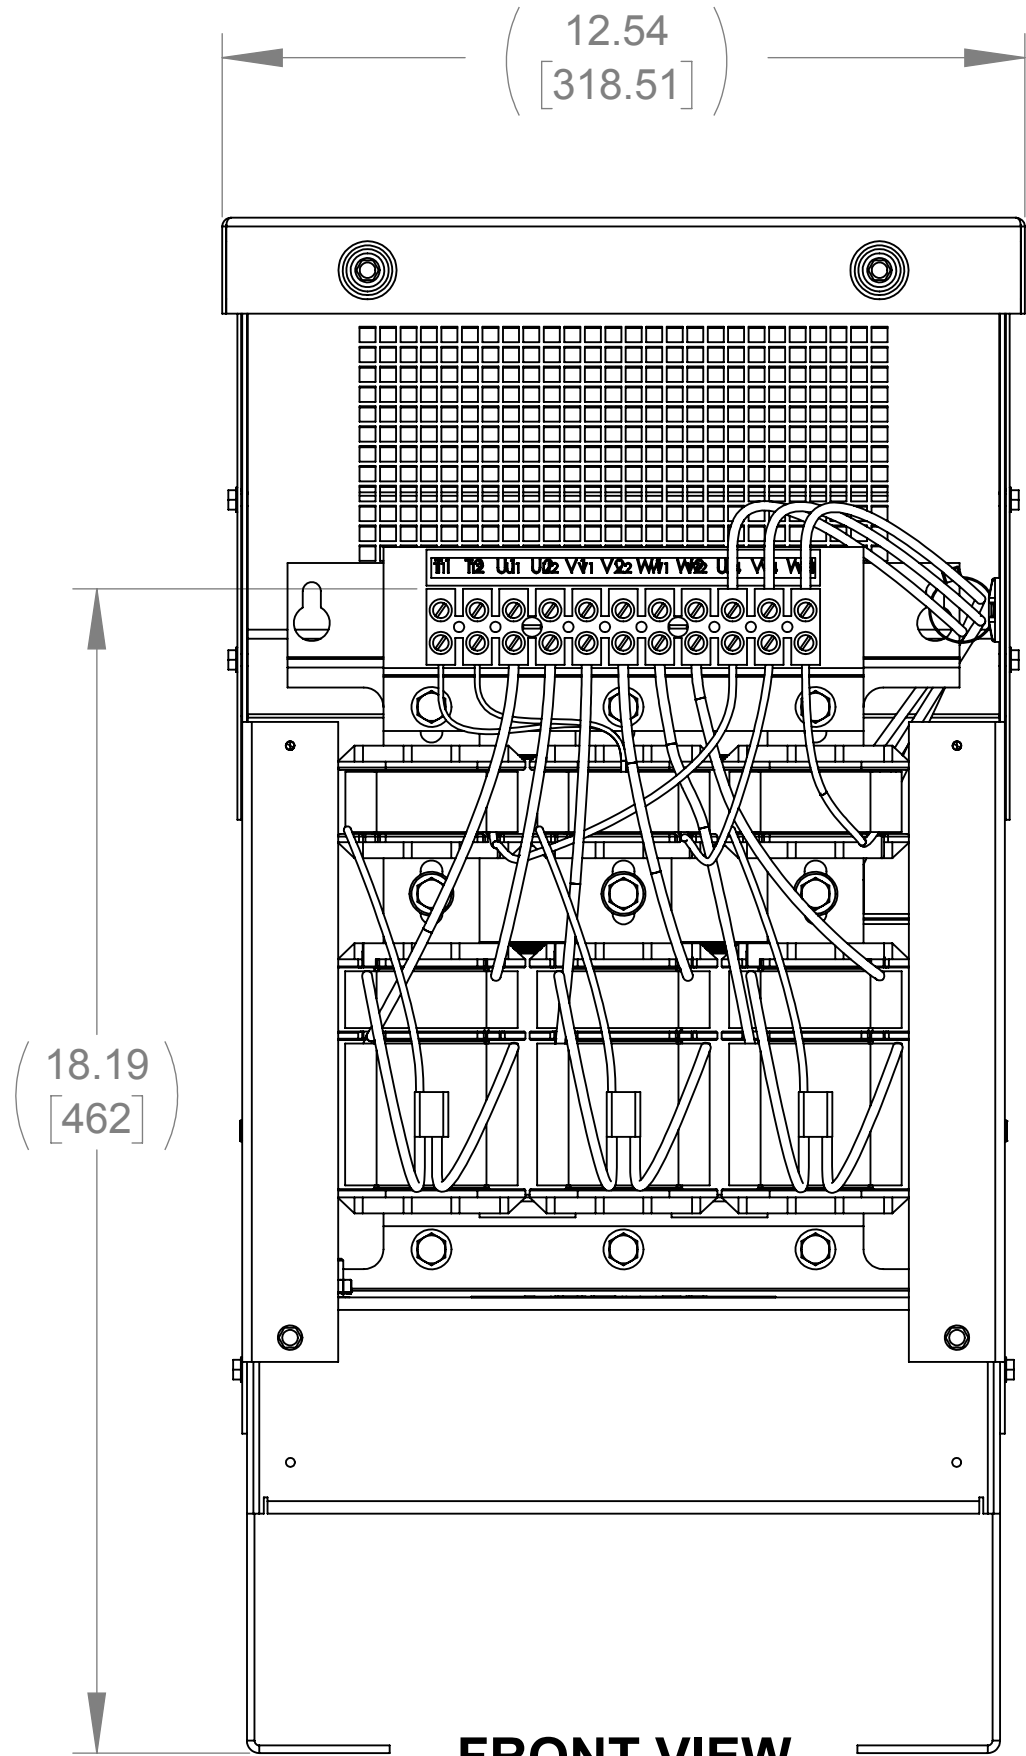

FRONT VIEW
(PANELS REMOVED)

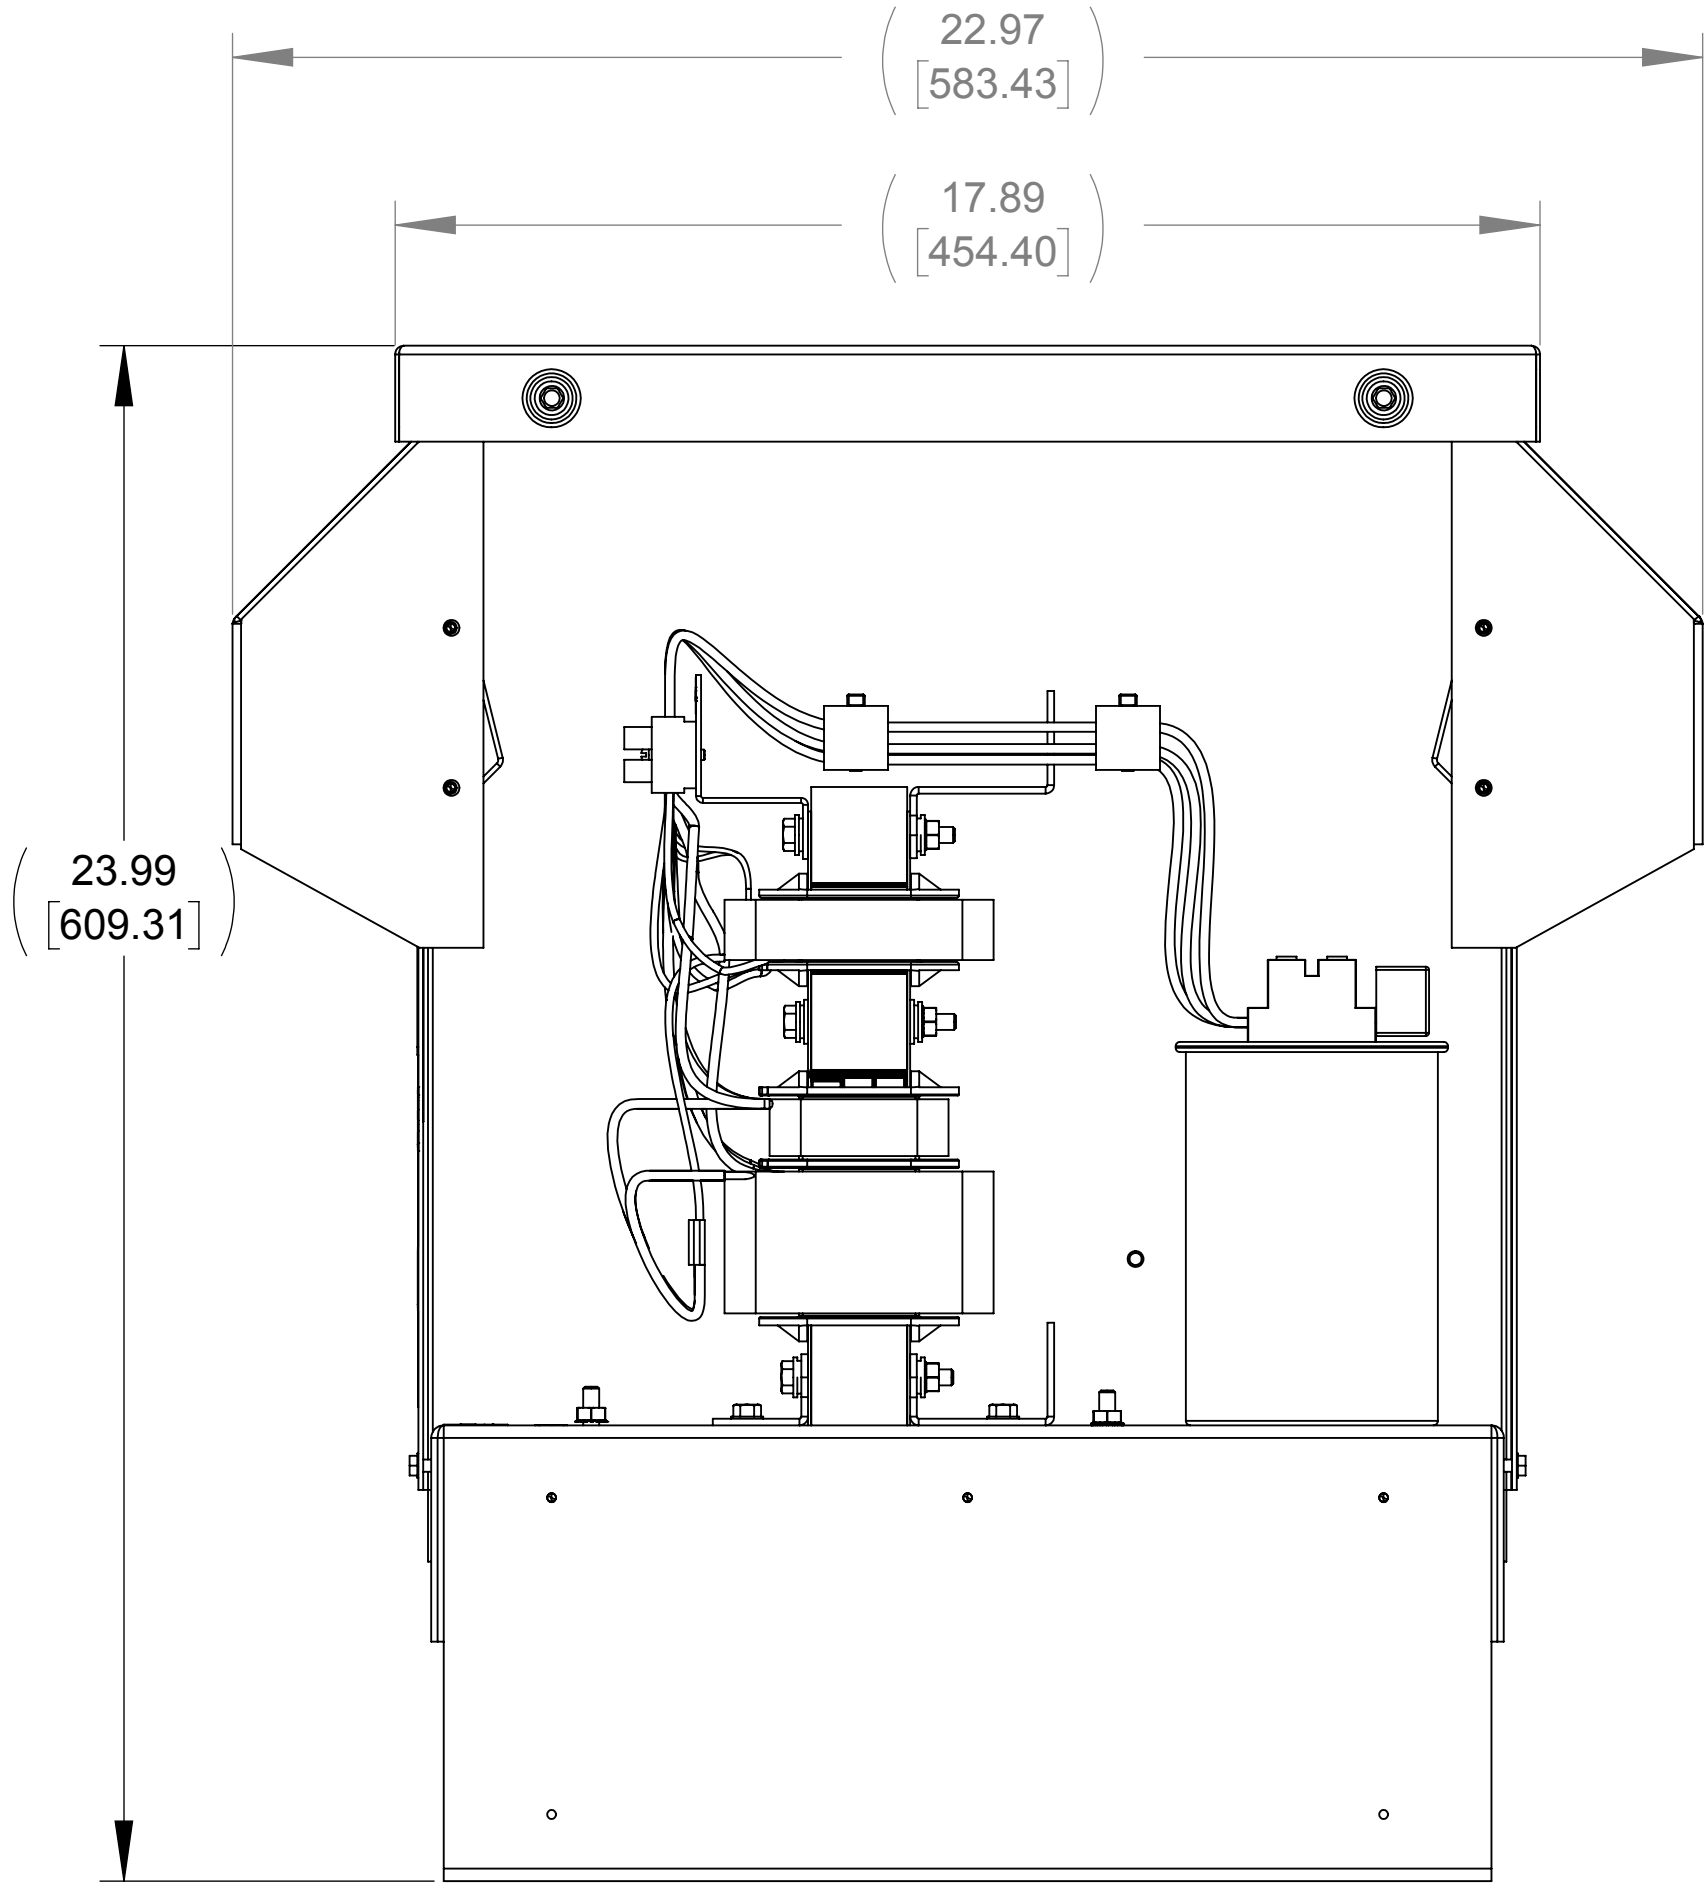


RIGHT SIDE VIEW
(PANELS REMOVED)

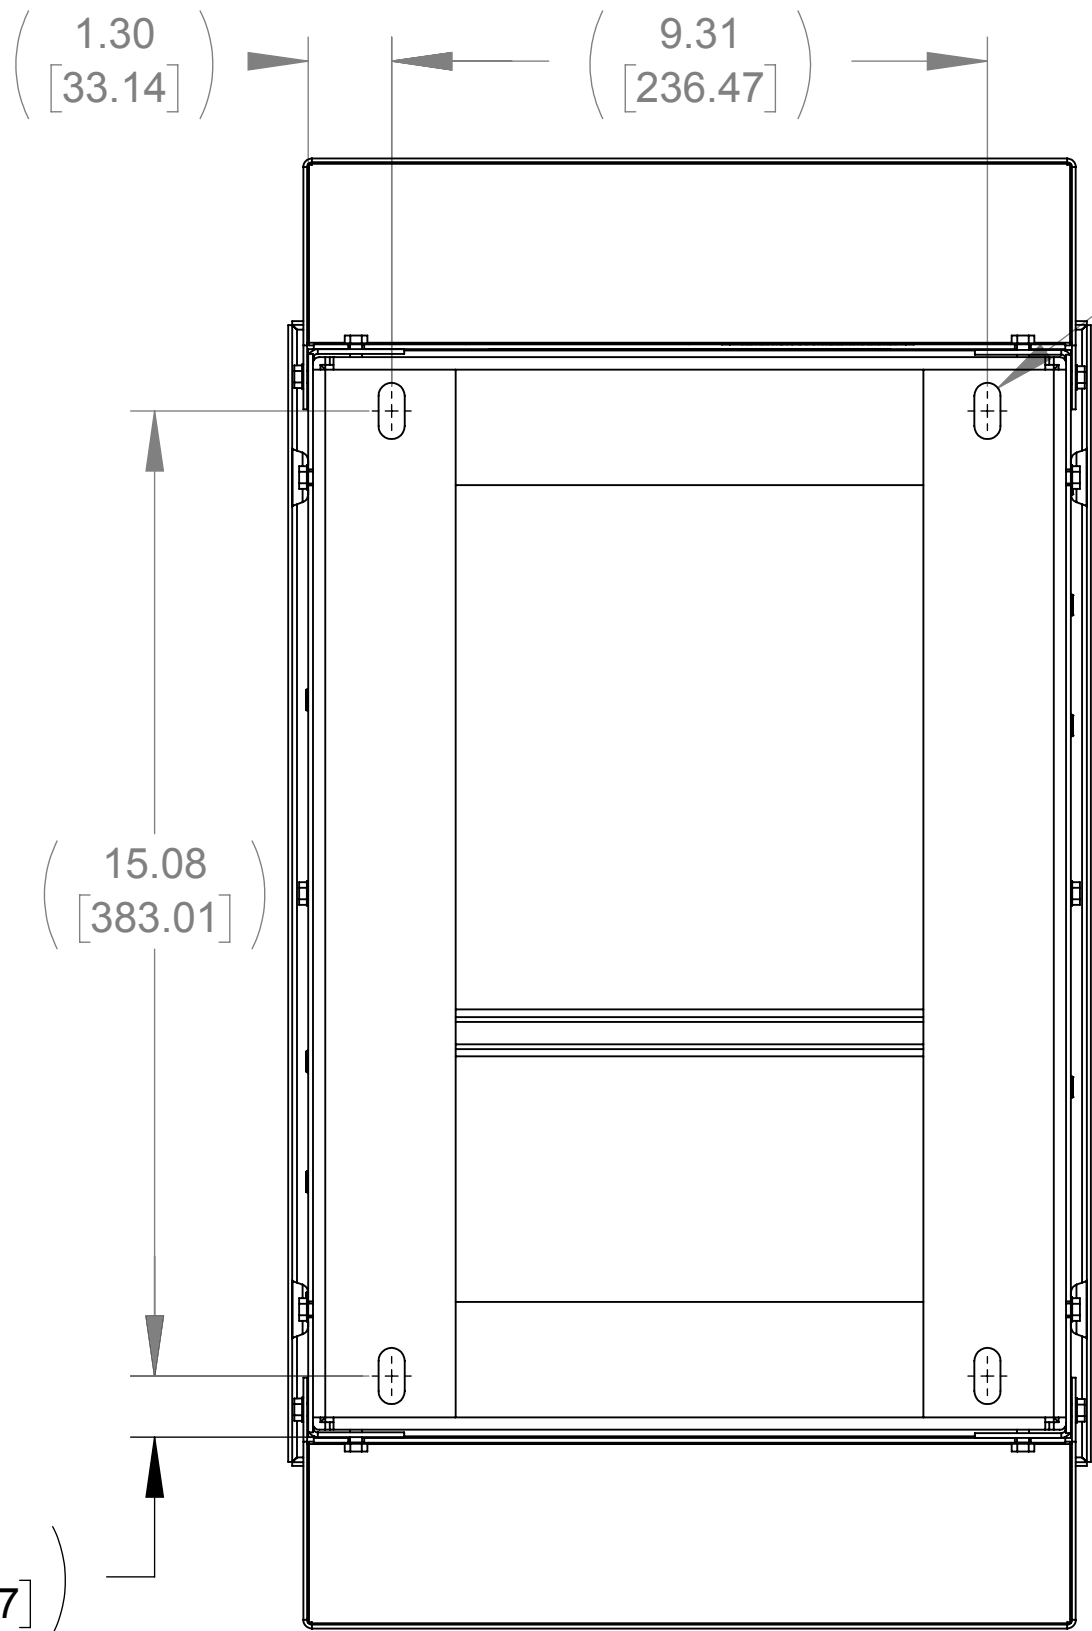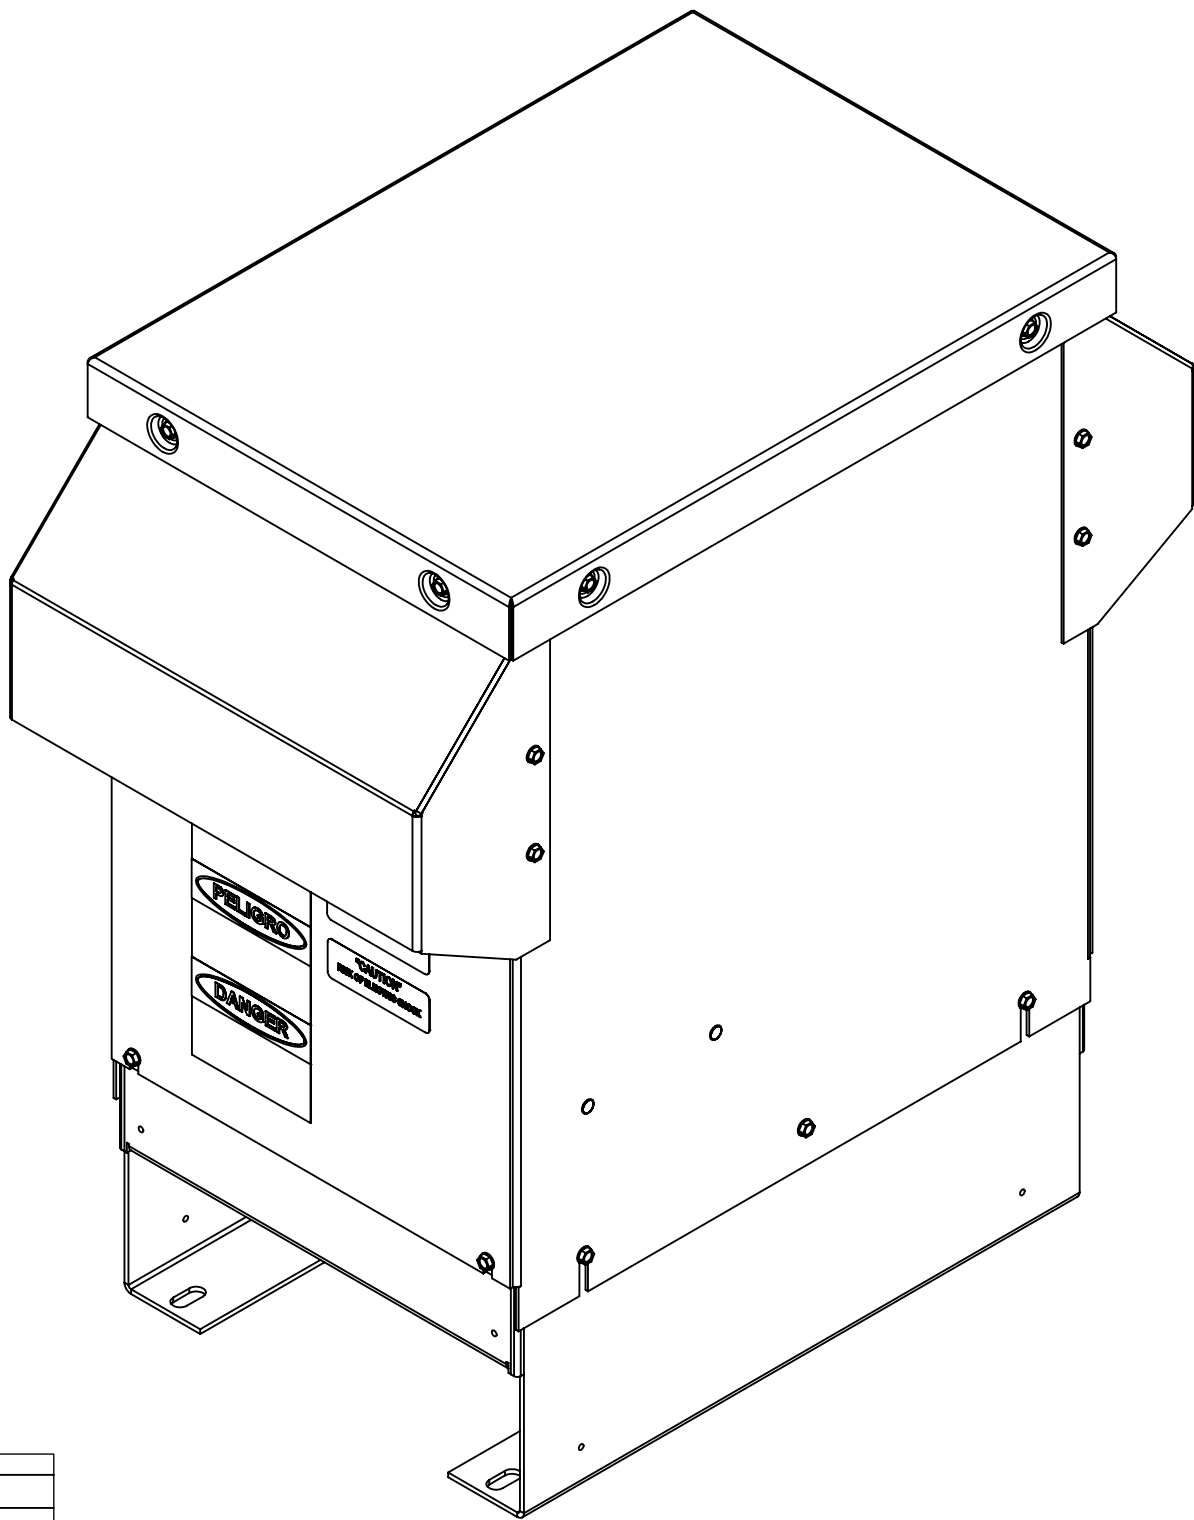


BOTTOM VIEW

.41 [10.41] X .88 [22.23]
SLOT, 4 PLACES


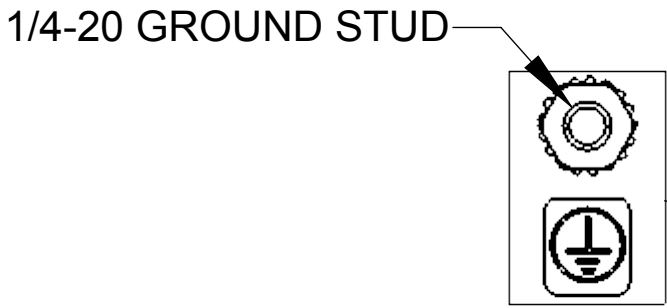


1/4-20 GROUND STUD

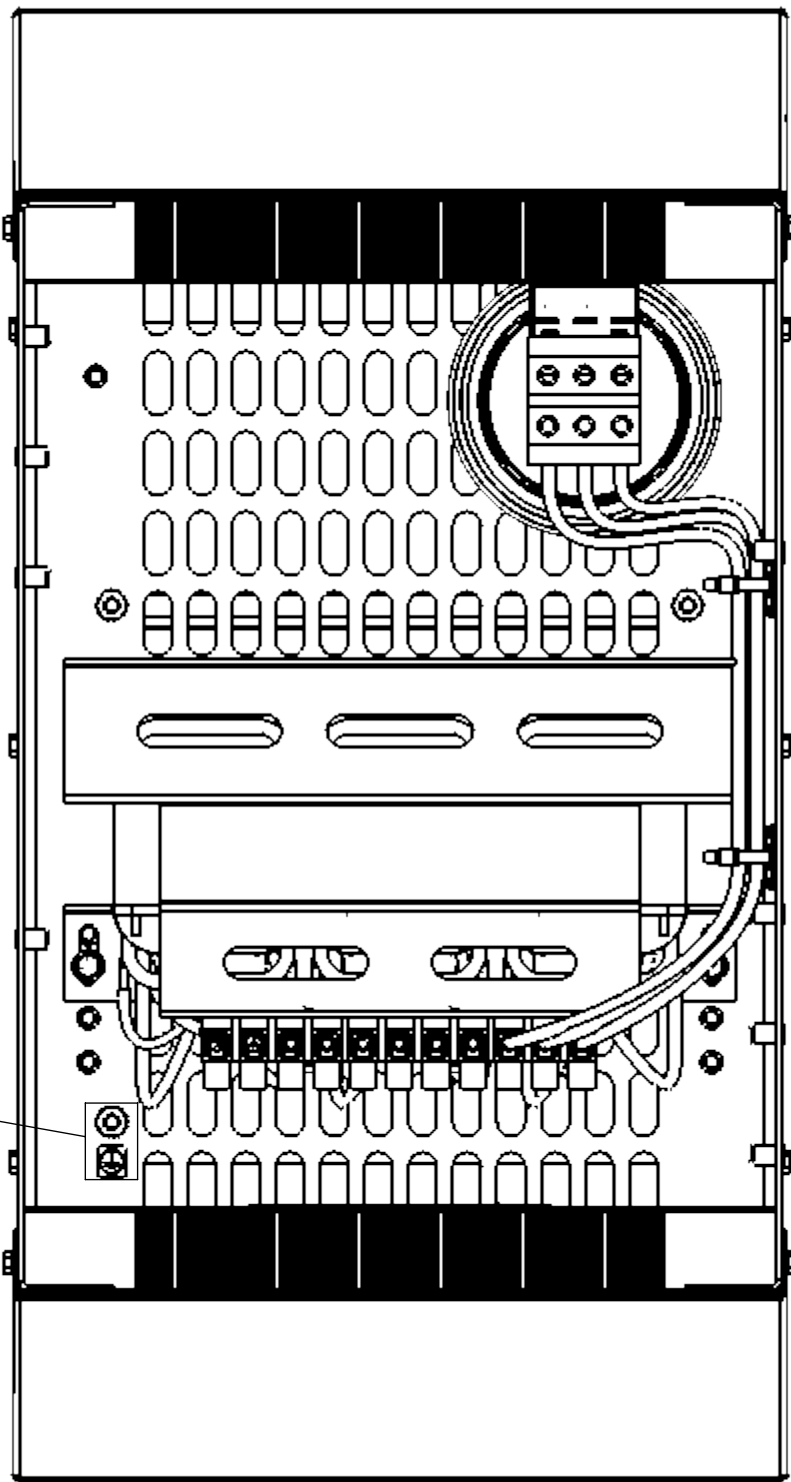

TOP VIEW
(PANELS REMOVED)


SEE NOTES 1, 2, & 3

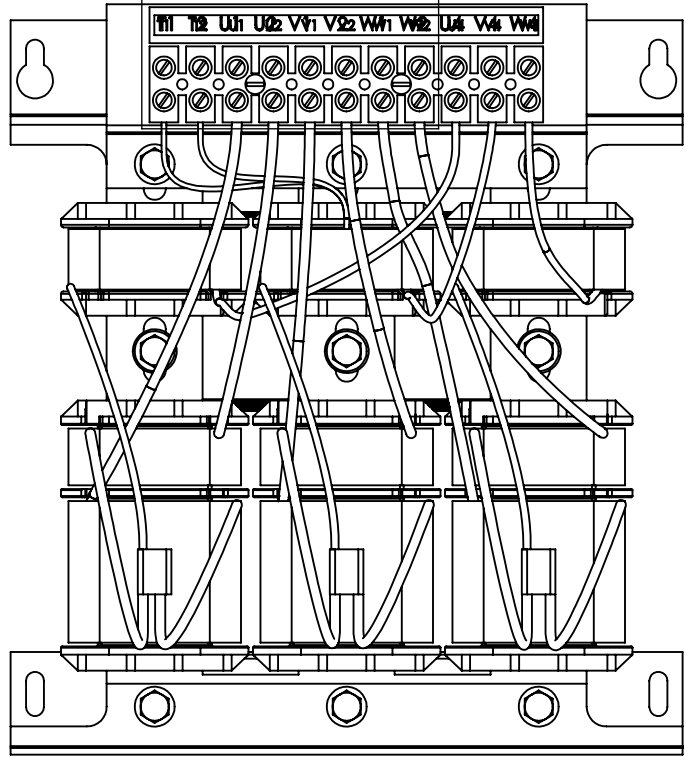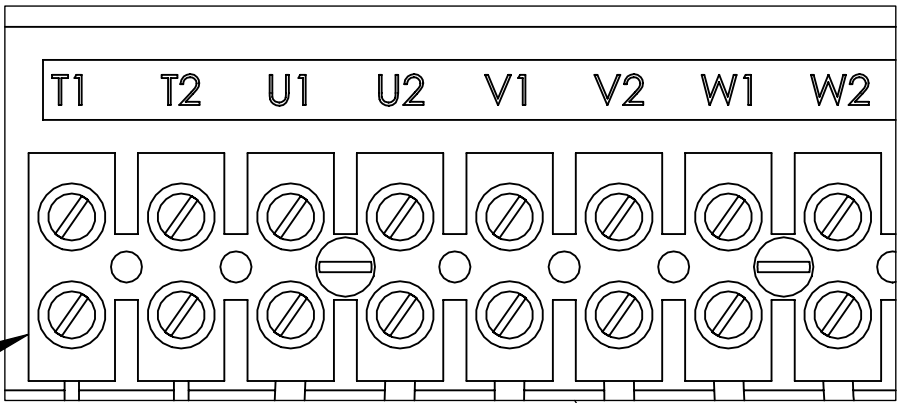

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
2. WIRE RANGE: 4-14 AWG.
3. CUSTOMER DOES NOT CONNECT TO U4, V4, & W4 LOCATED ON THE REACTOR TERMINAL BLOCK.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION							
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION							
<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]</div>		<div> AN BL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200</div>		MATRIX AP 21A 480V 60HZ FILTER, NEMA 3R ENCLOSURE							
		DRAWN		DATE		SIZE		DWG No.		REV	
		JP		05/03/12		D		CD MAPW0021D		01	
		CHECKED		DATE		SCALE				SHEET 1 OF 1	
		RH		03/20/14		1:3					
		APPROVED		DATE							
		RH		03/20/14							