

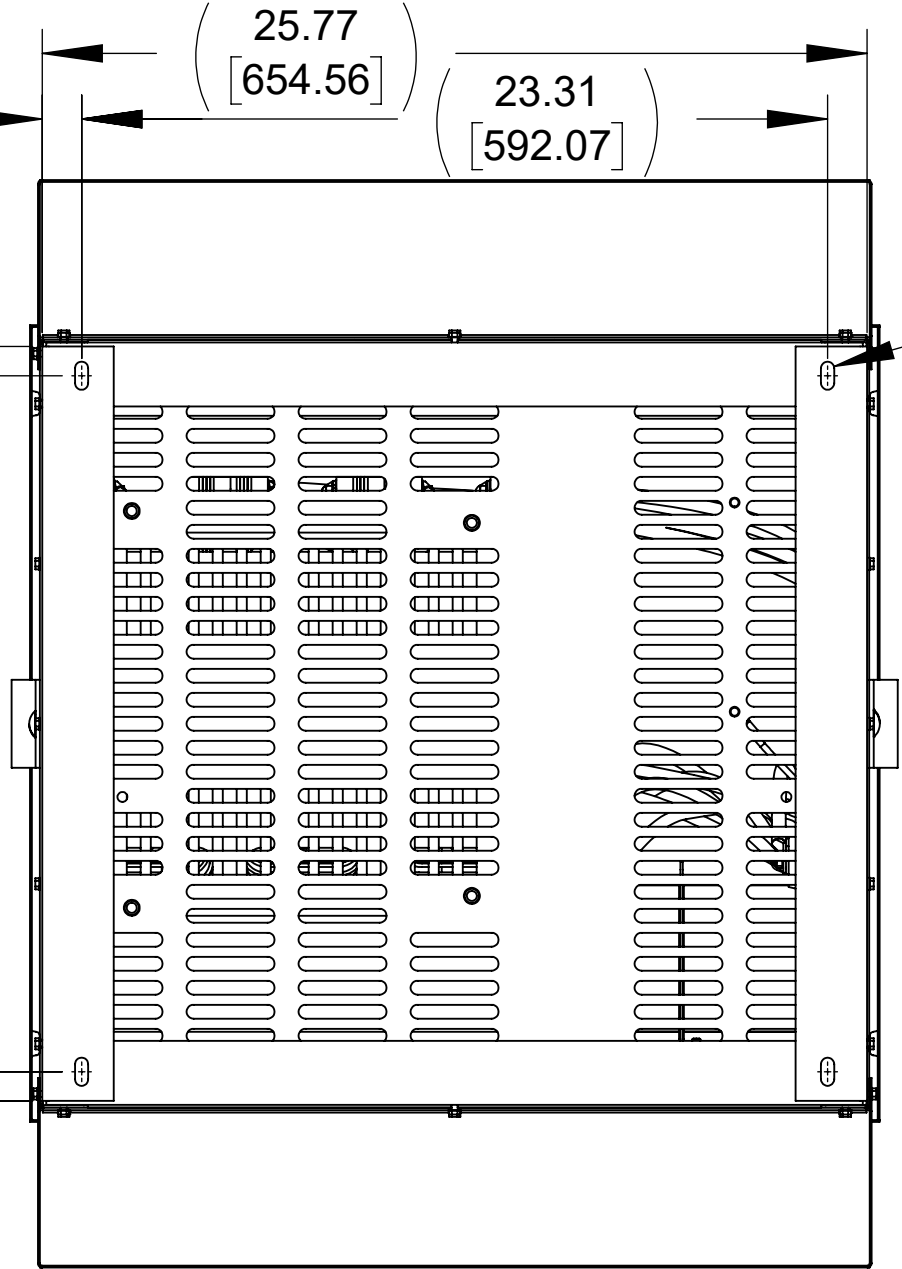
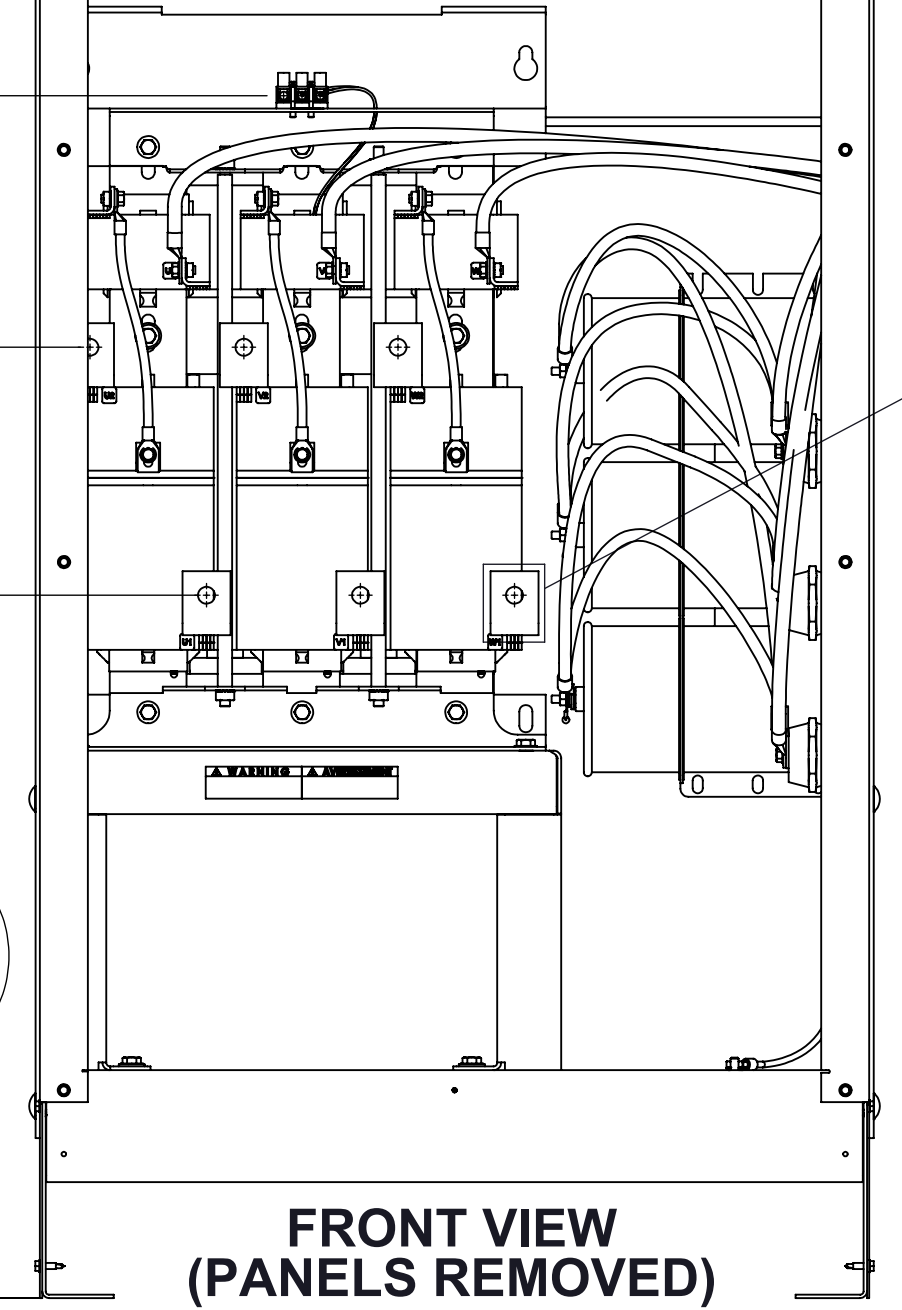
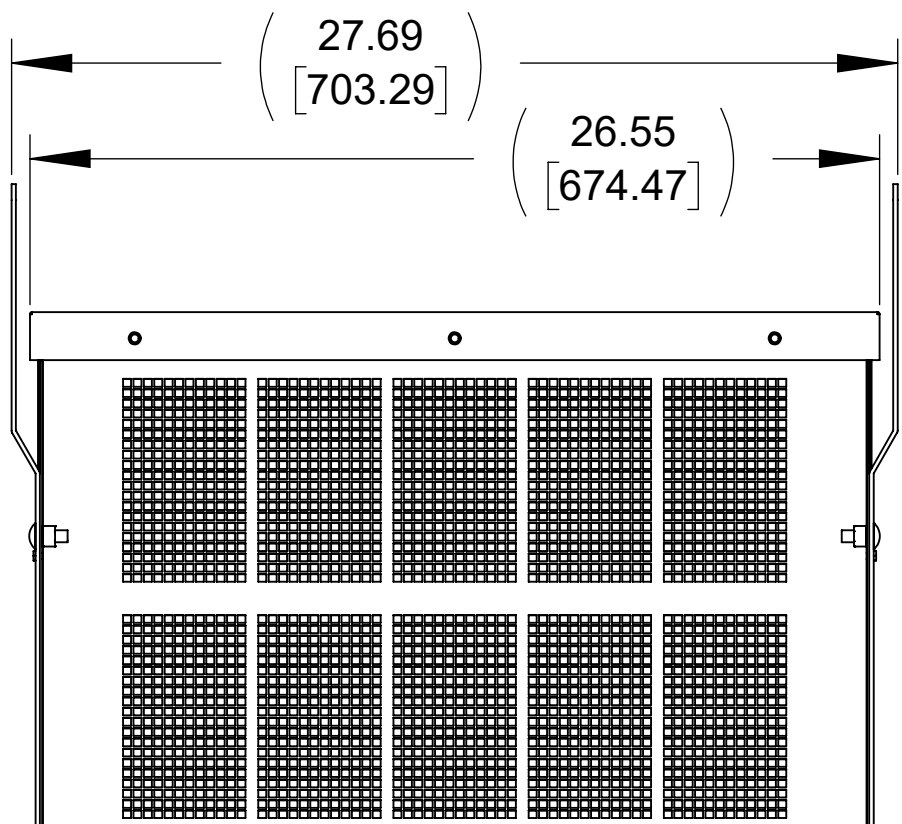


APPROX. WEIGHT
(LBS)
680

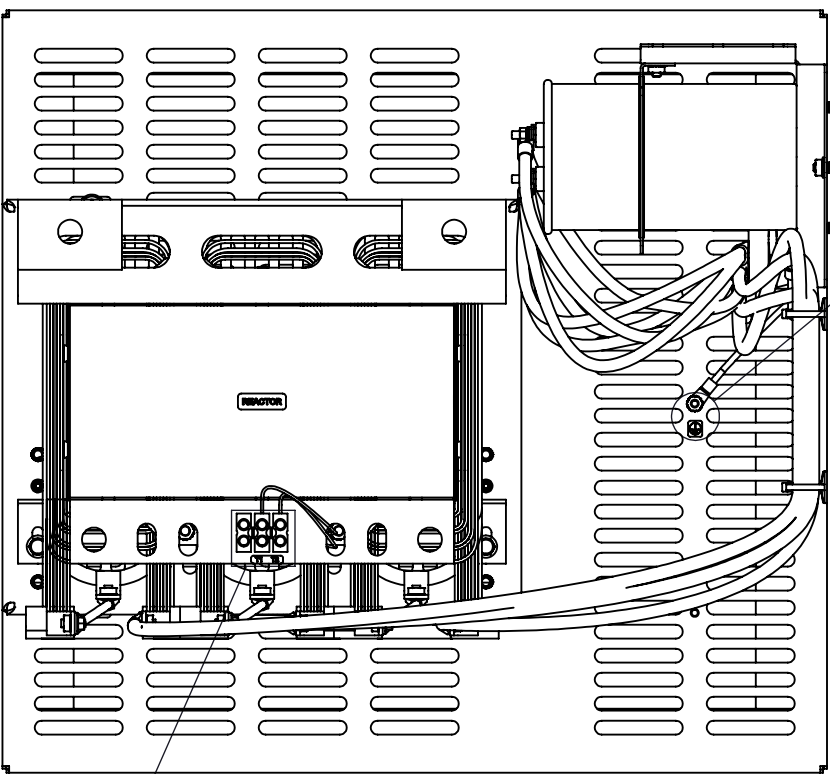





A

(.41 [10.41] X .88 [22.35])
SLOT, 4 PLACES

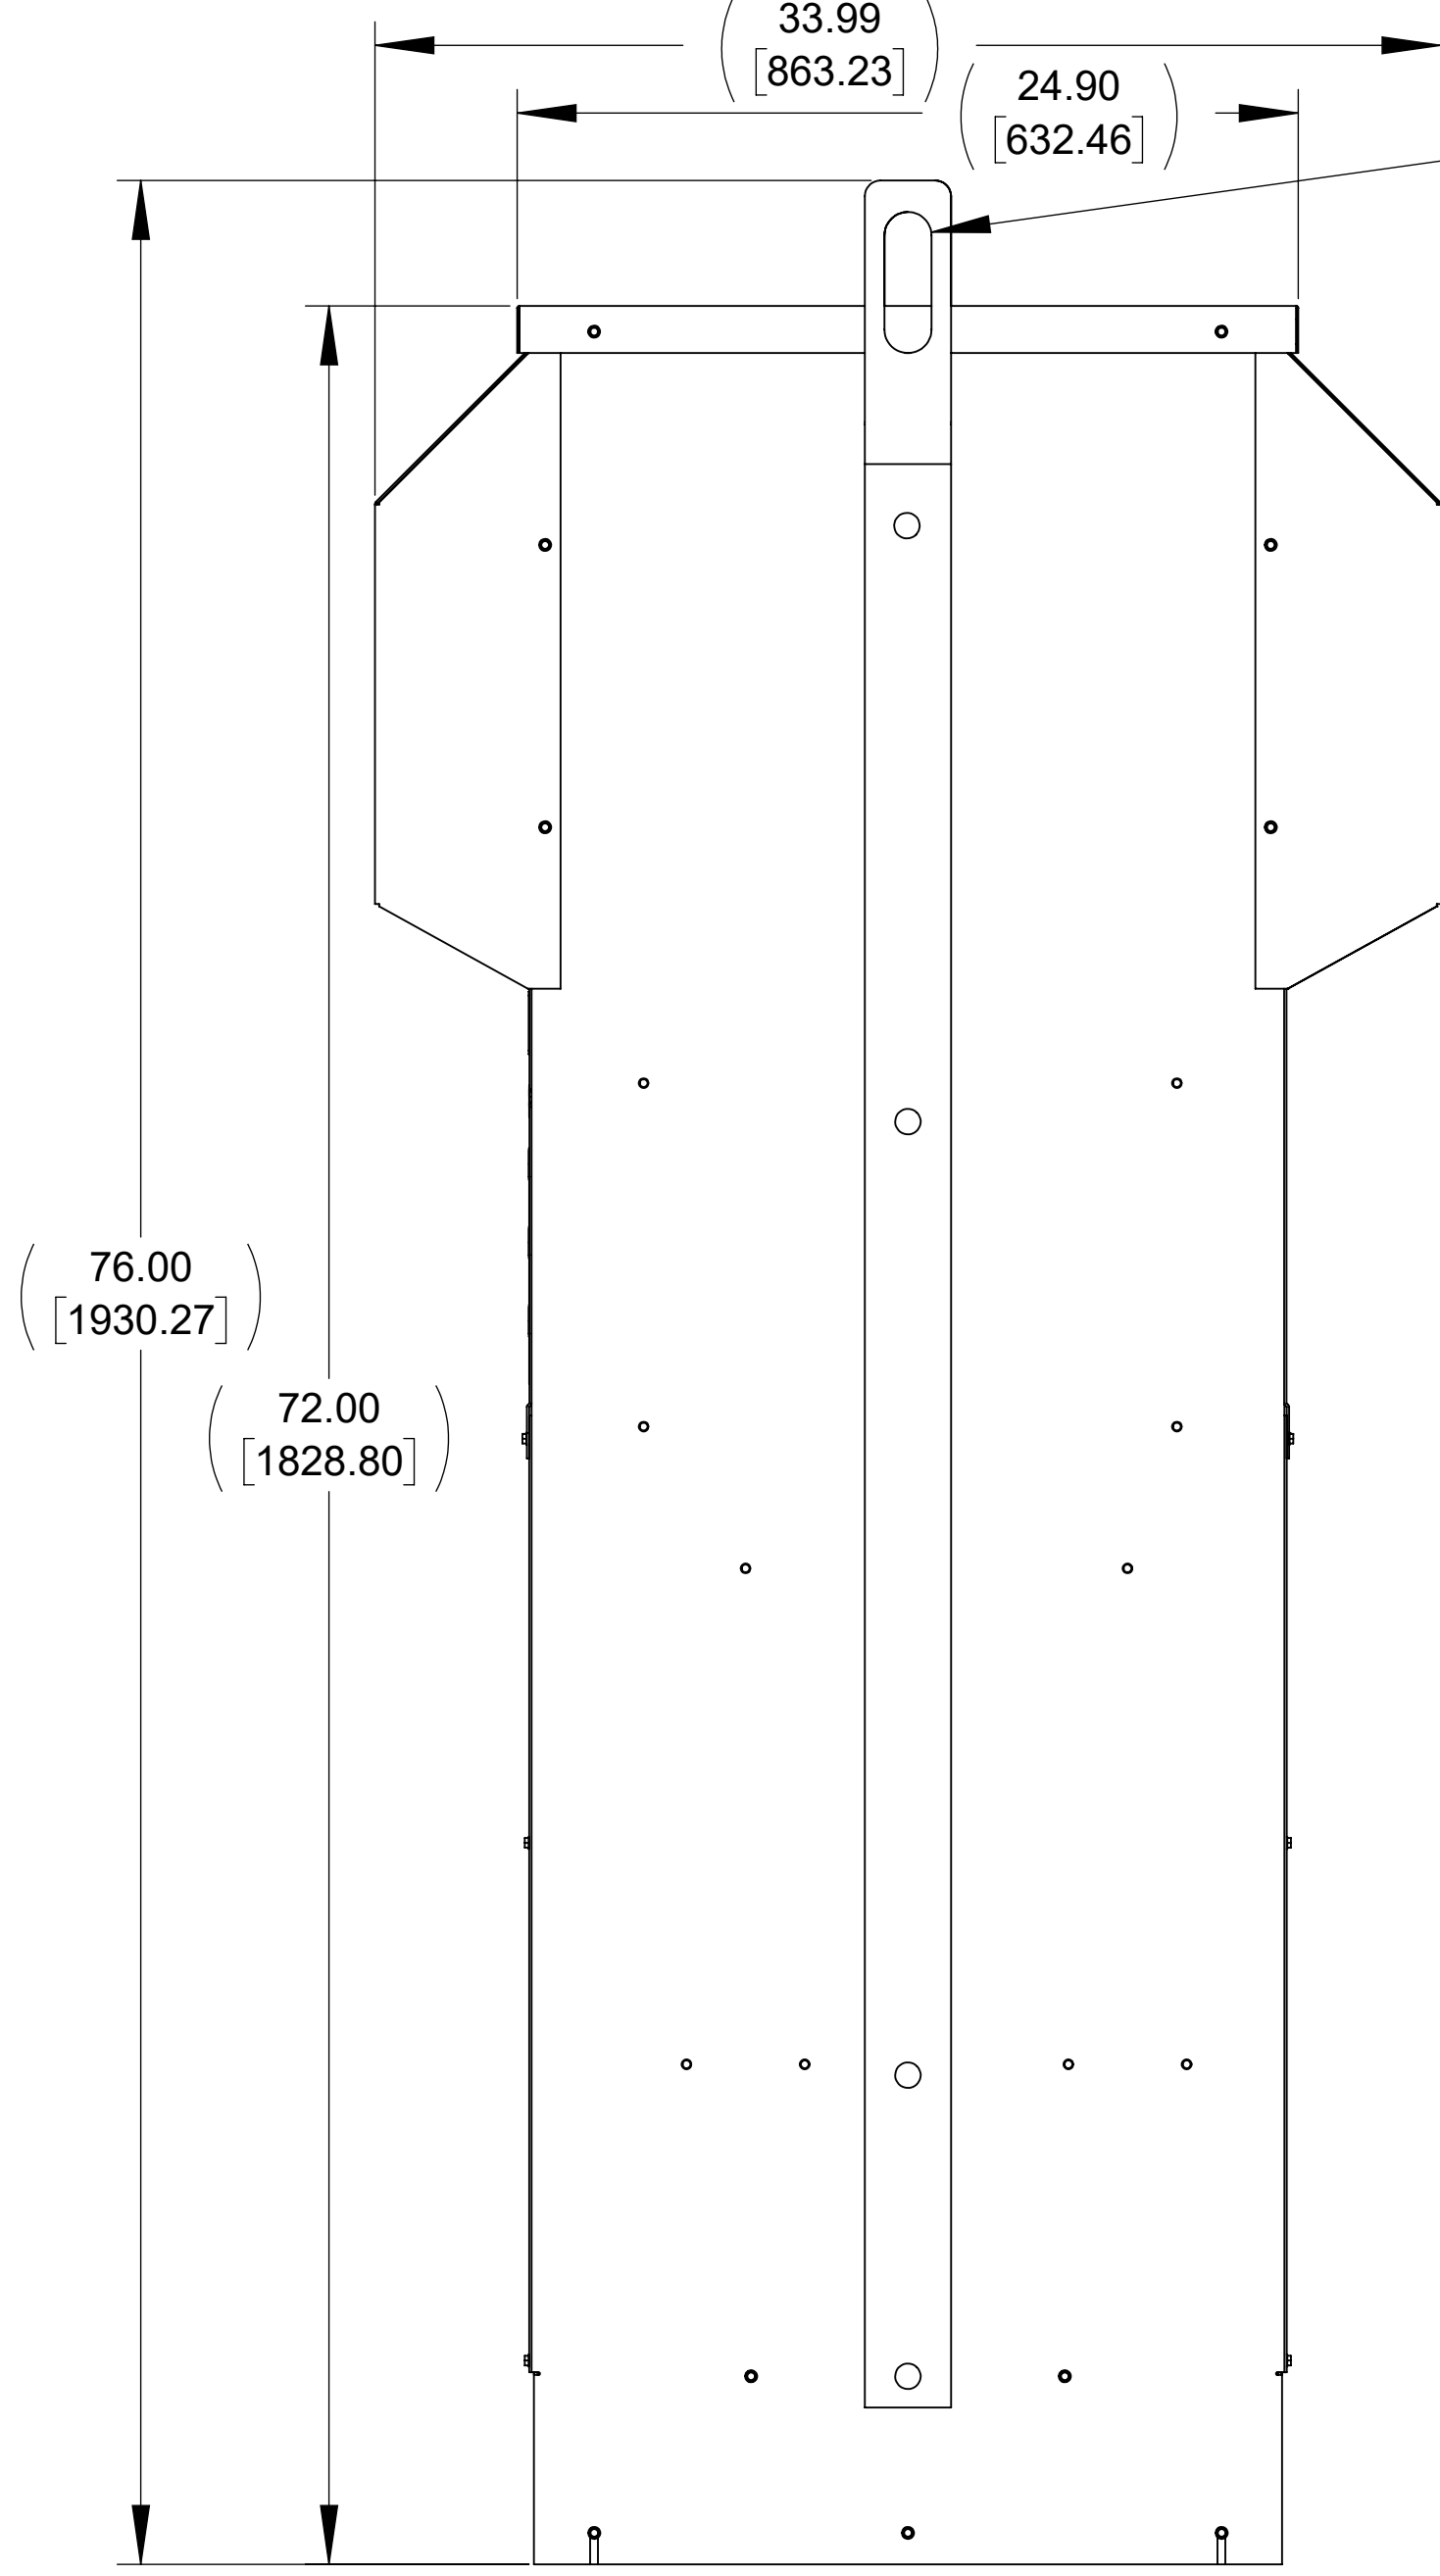


B


**TOP VIEW
(PANELS REMOVED)**

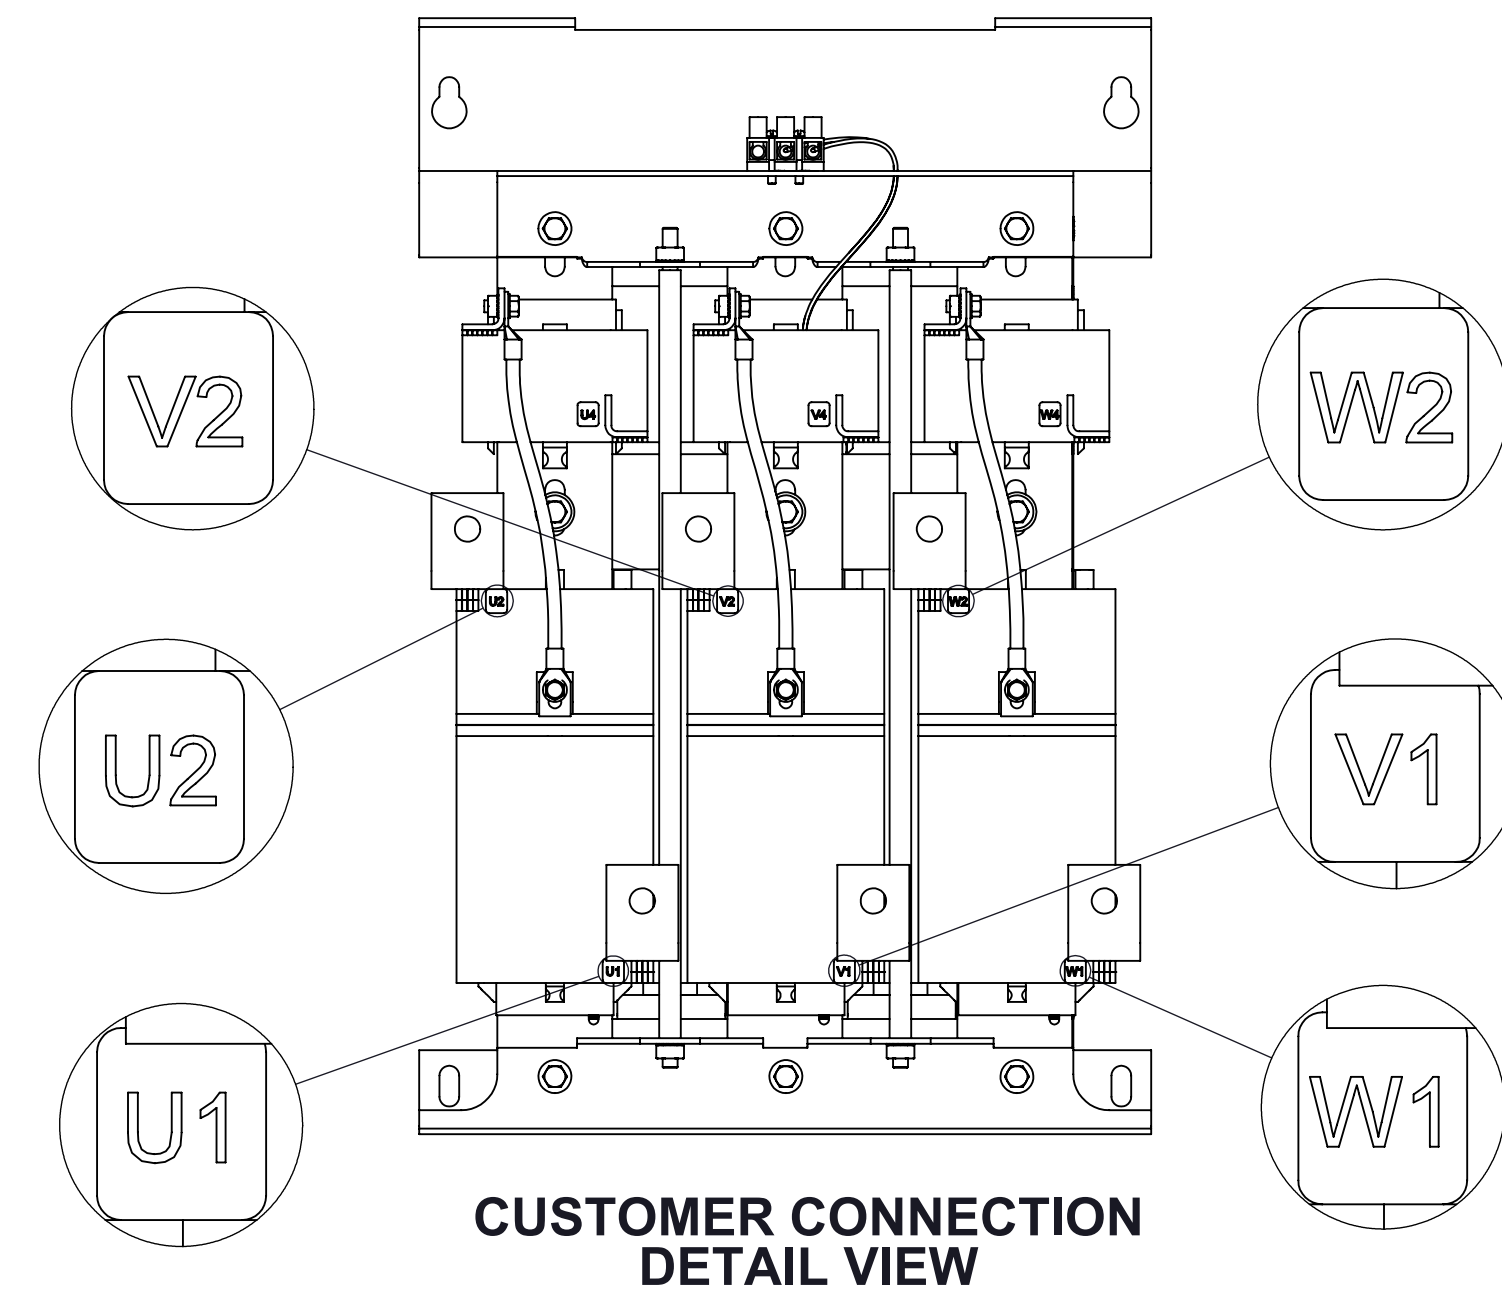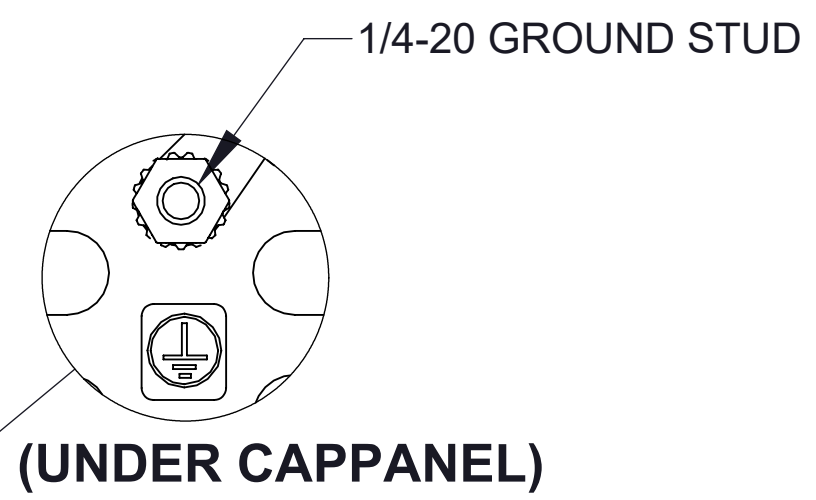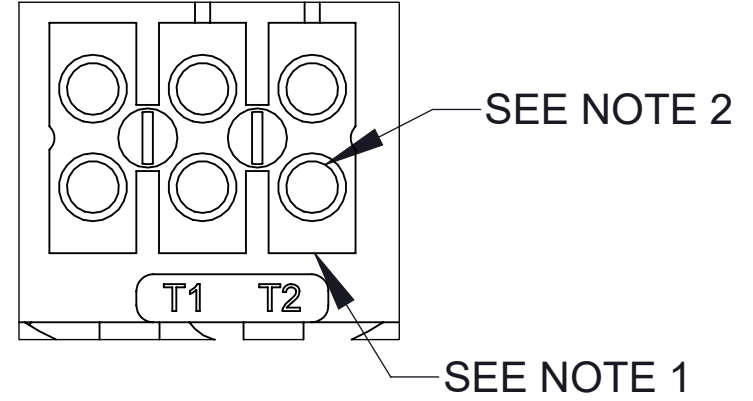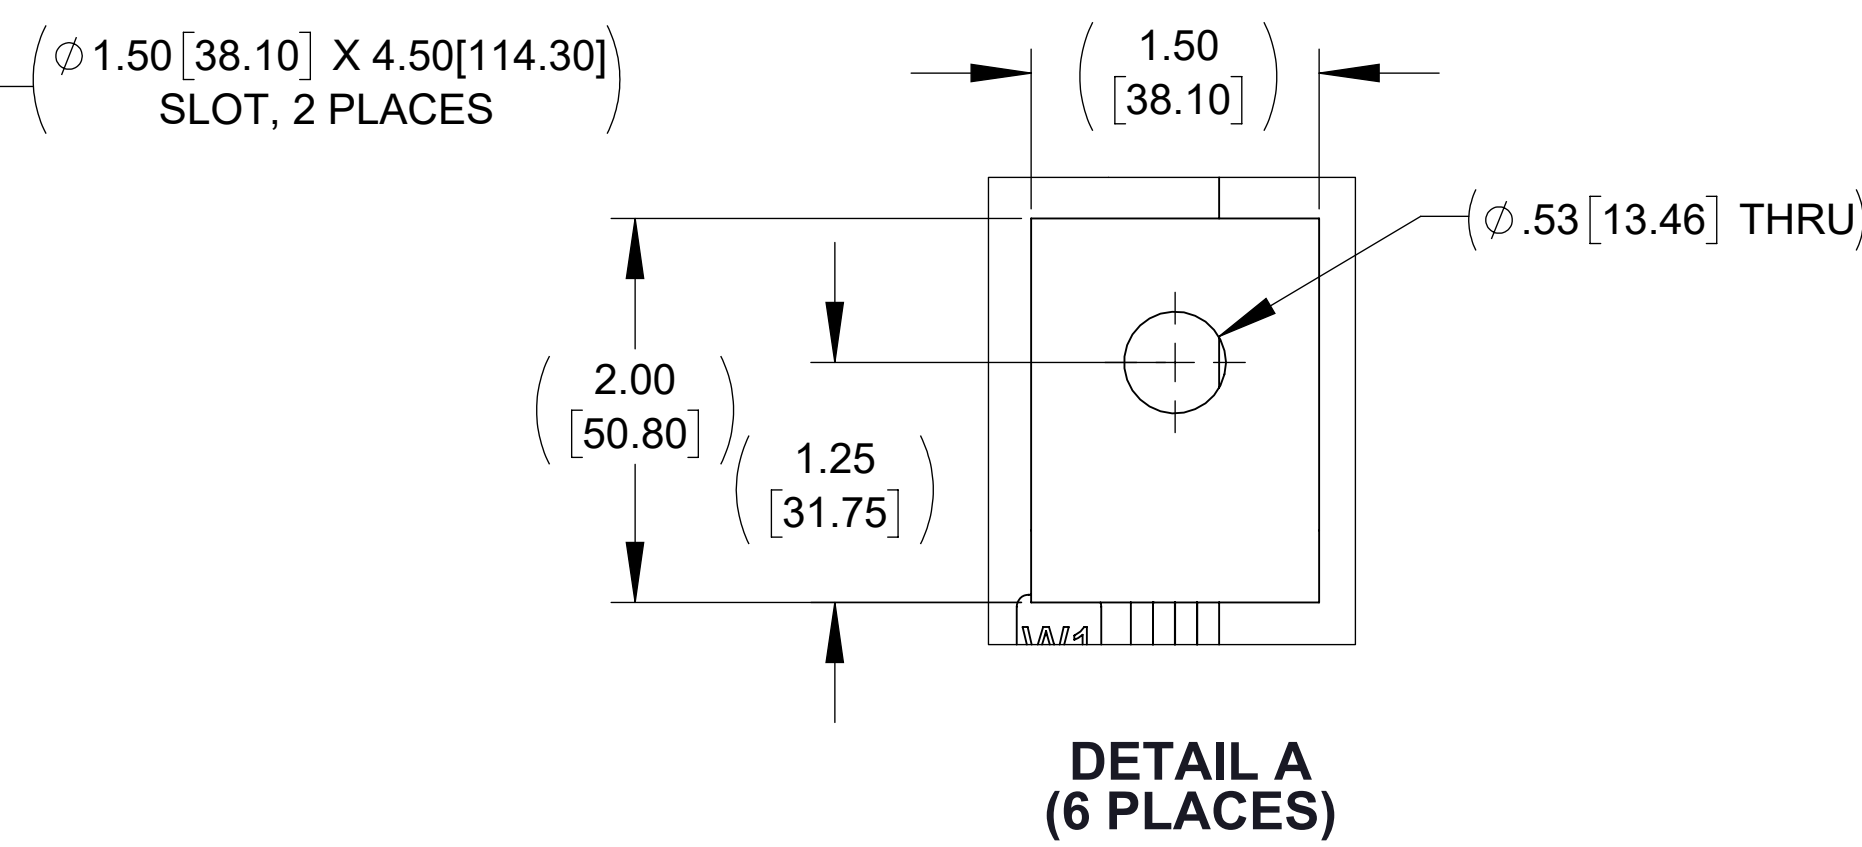

- NOTES:**
1. TERMINAL WIRE RANGE: 4-14 AWG.
 2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
 3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:		DRAWN		MATRIX AP 403A 480V 60HZ FILTER NEMA, 3R ENCL		
 N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253-8200		MM		DATE		
		CHECKED		DATE		
		MN		03/27/20		
ANGLES: ± 1 °		APPROVED		DATE		
1 PLACE .X: ± .1 [2.5]		PY		03/30/20		
2 PLACE .XX: ± .03 [0.76]				SIZE		
3 PLACE .XXX: ± .010 [0.254]				D		
				DWG No.		
				CD MAPW0403D		
				SCALE		
				1:6		
						REV
						06
						SHEET 1 OF 1

ECO No	DESCRIPTION	REV BY	DATE
M12785	UPDATE TO MODIFIED CAB-26APD & UPDATE FORMAT	MN	03/27/20

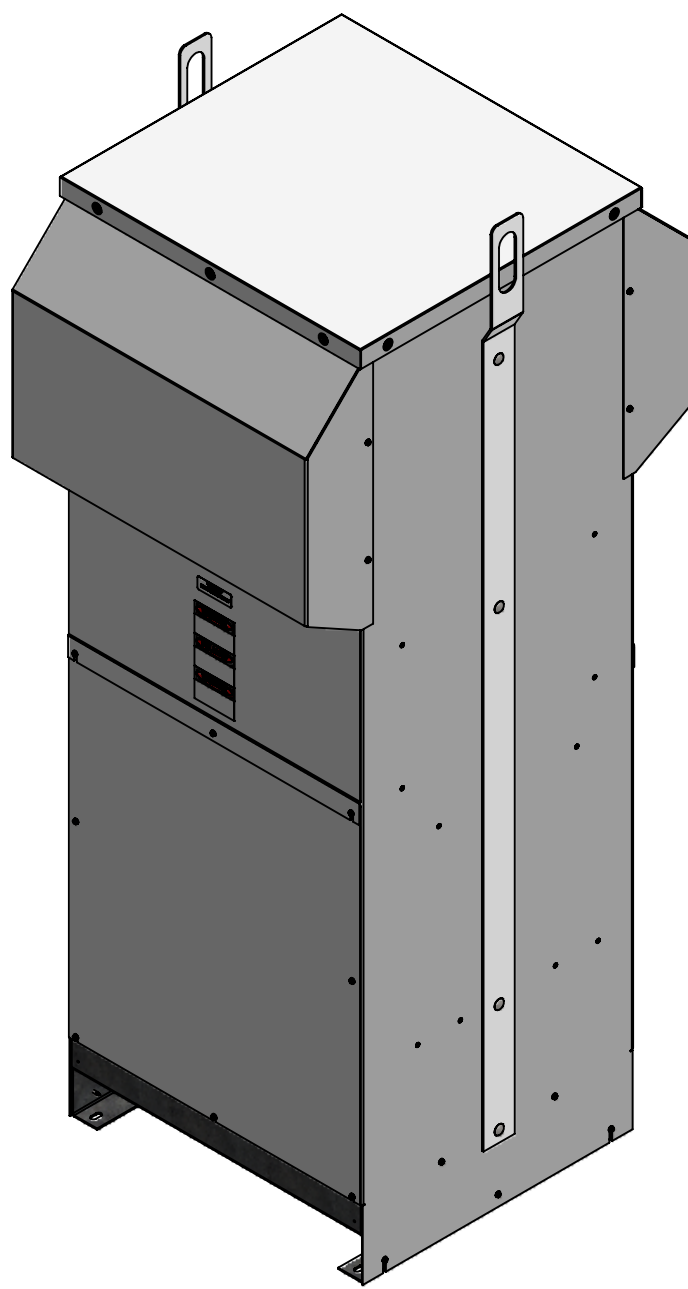

D

C

B

A