



APPROX. WEIGHT (LBS)
1275


ECO No	DESCRIPTION	REV BY	DATE
M9834	REPLACED CAPPANEL-576 WITH 576C	MN	09/06/16

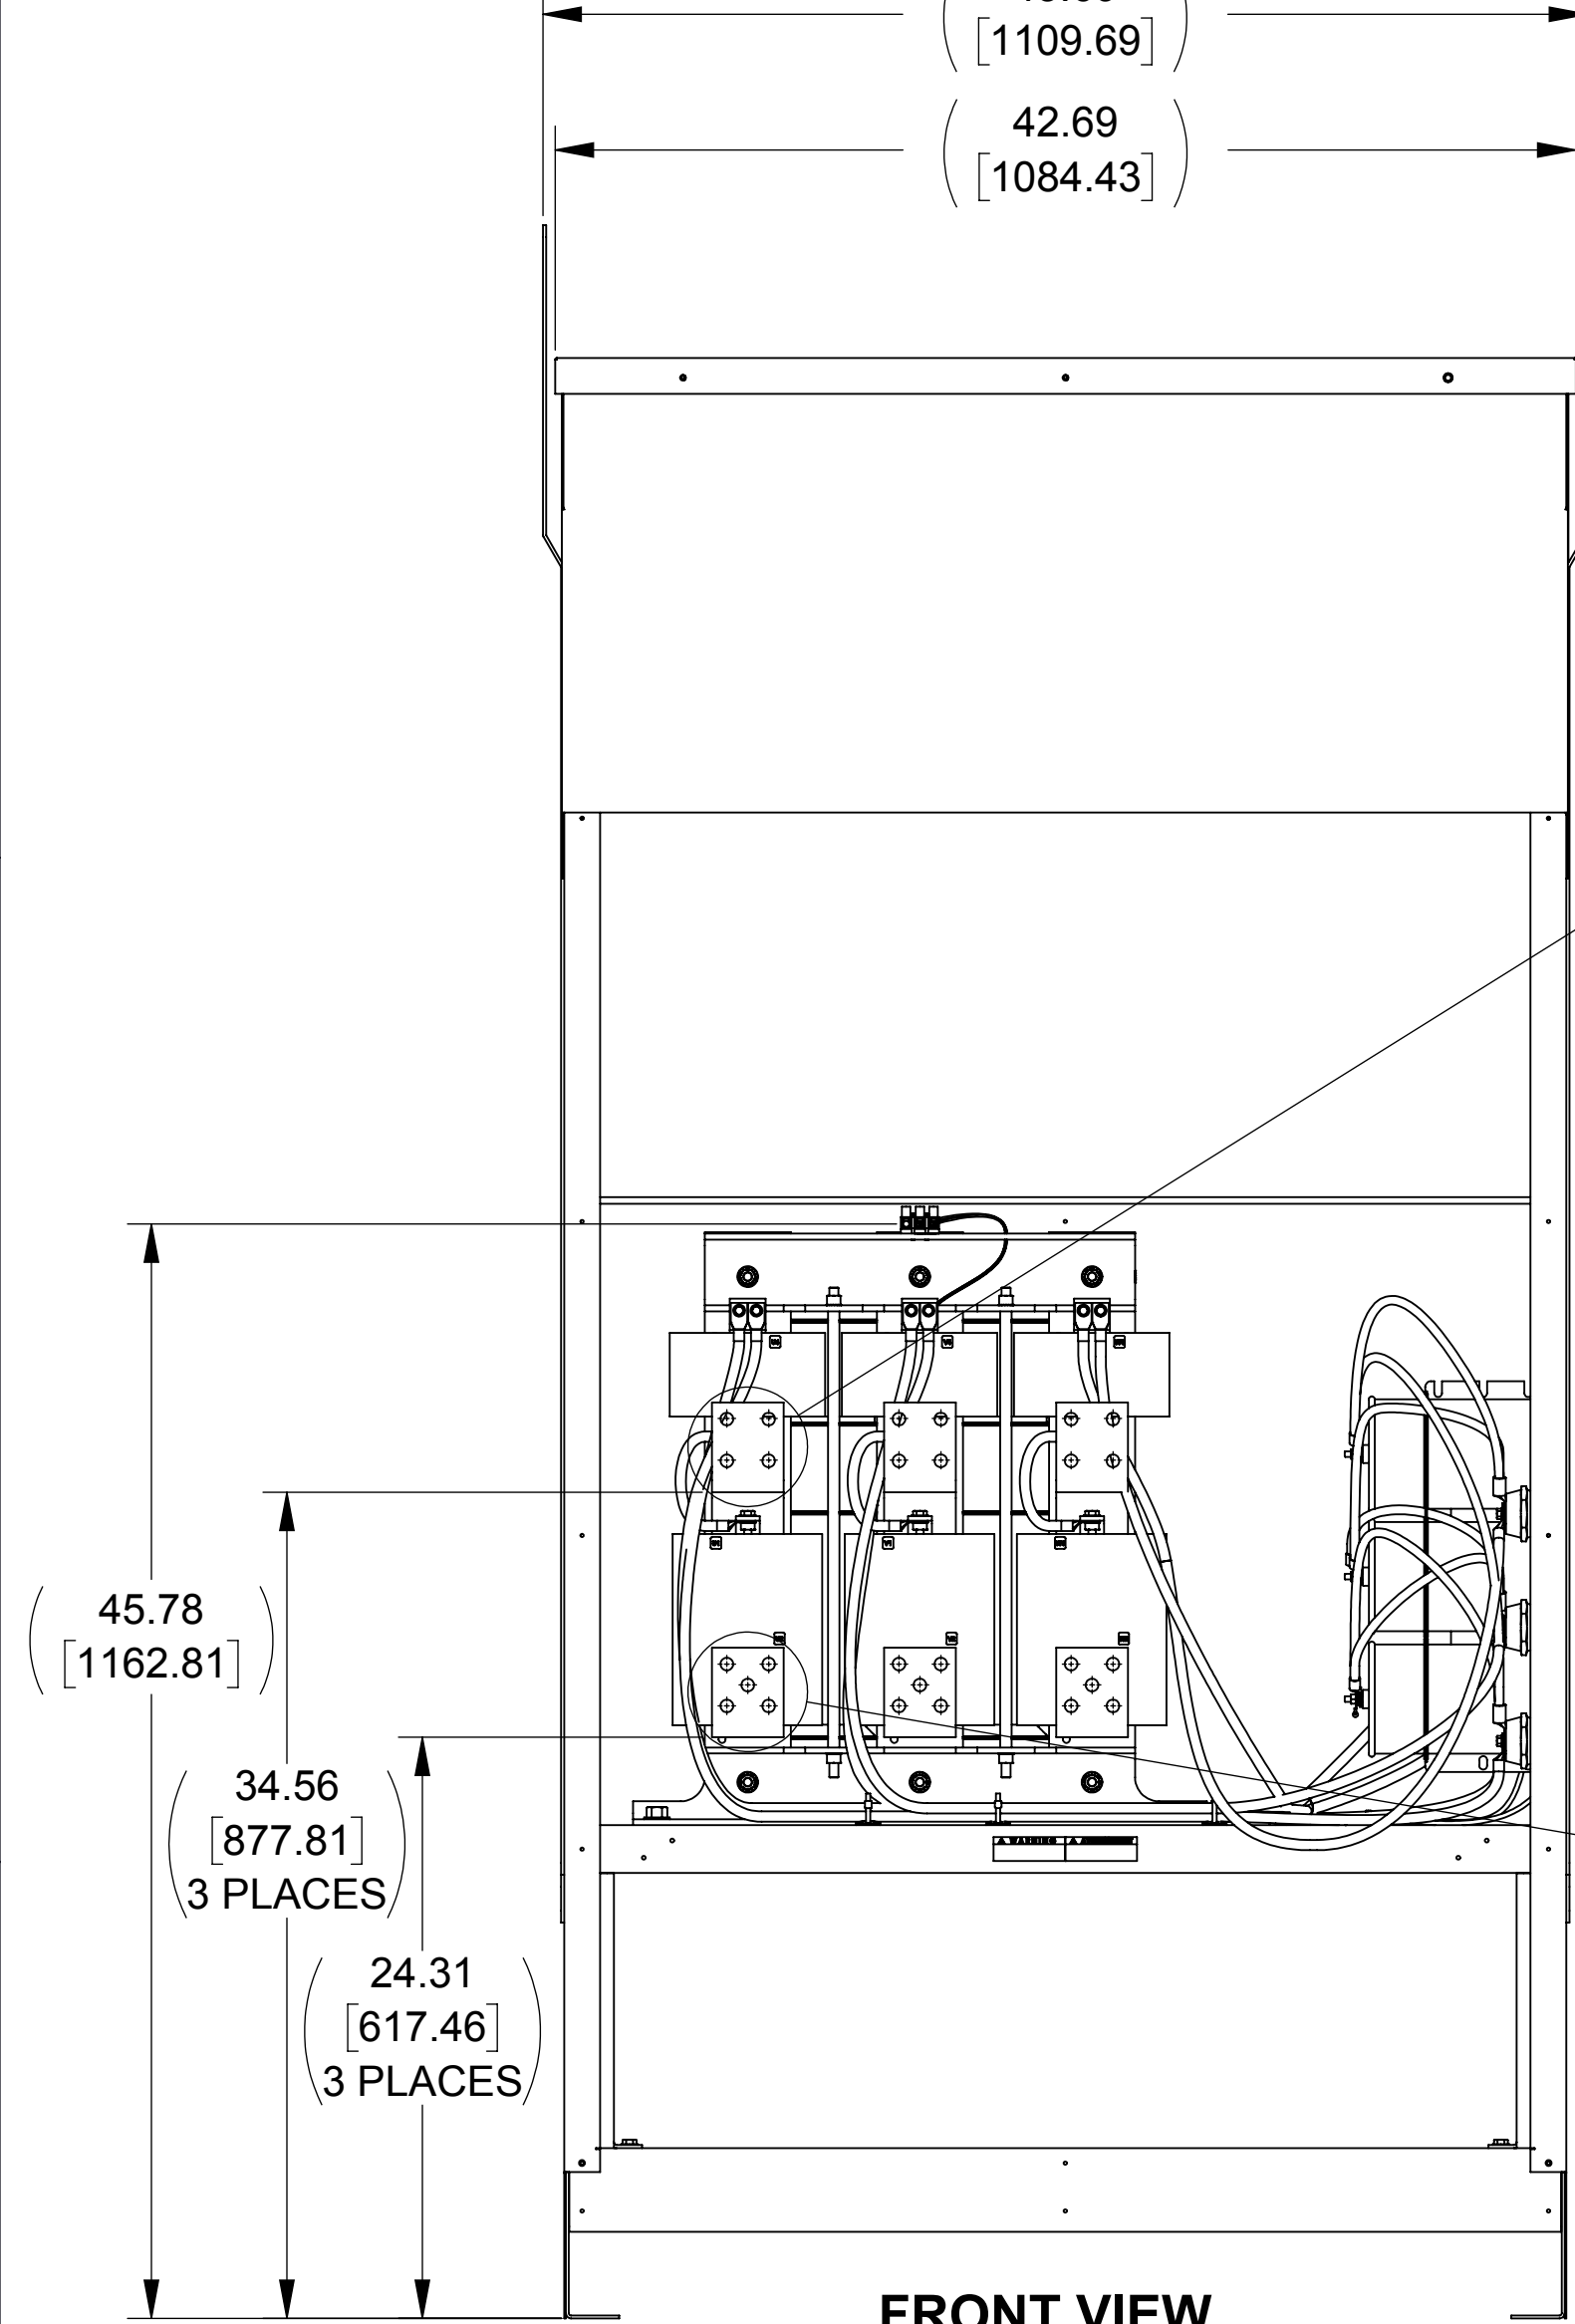

FRONT VIEW
(PANELS REMOVED)

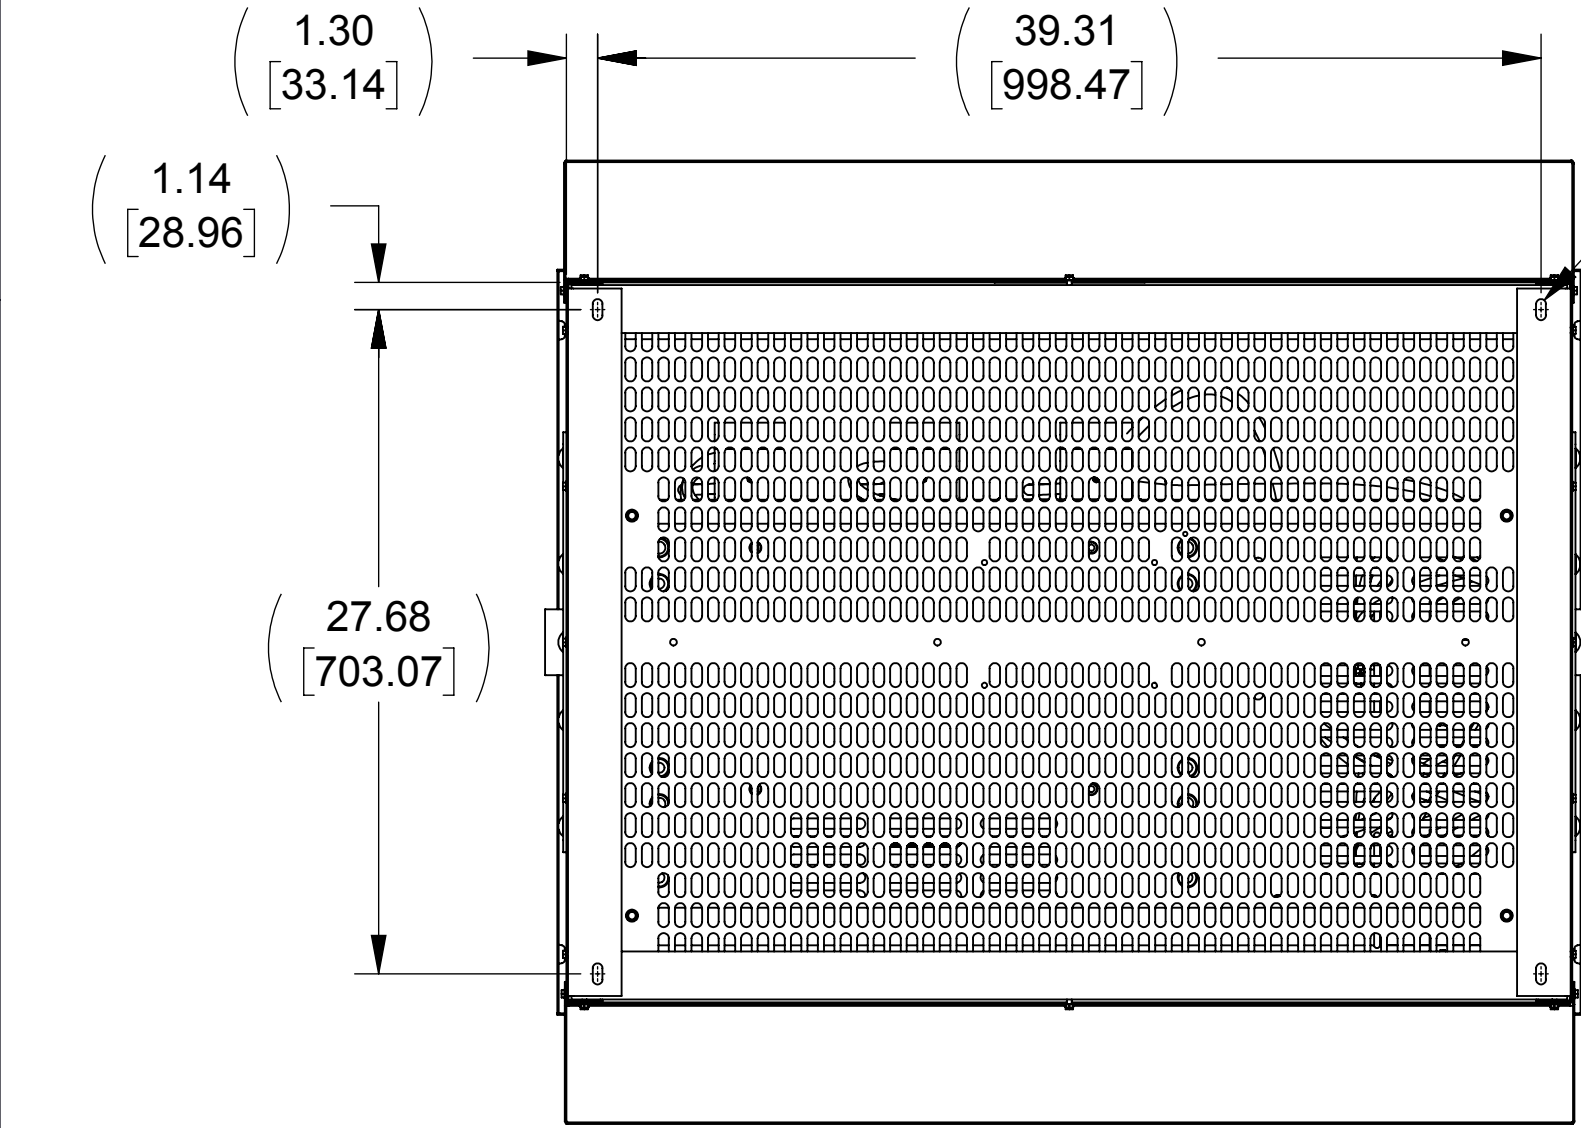


BOTTOM VIEW

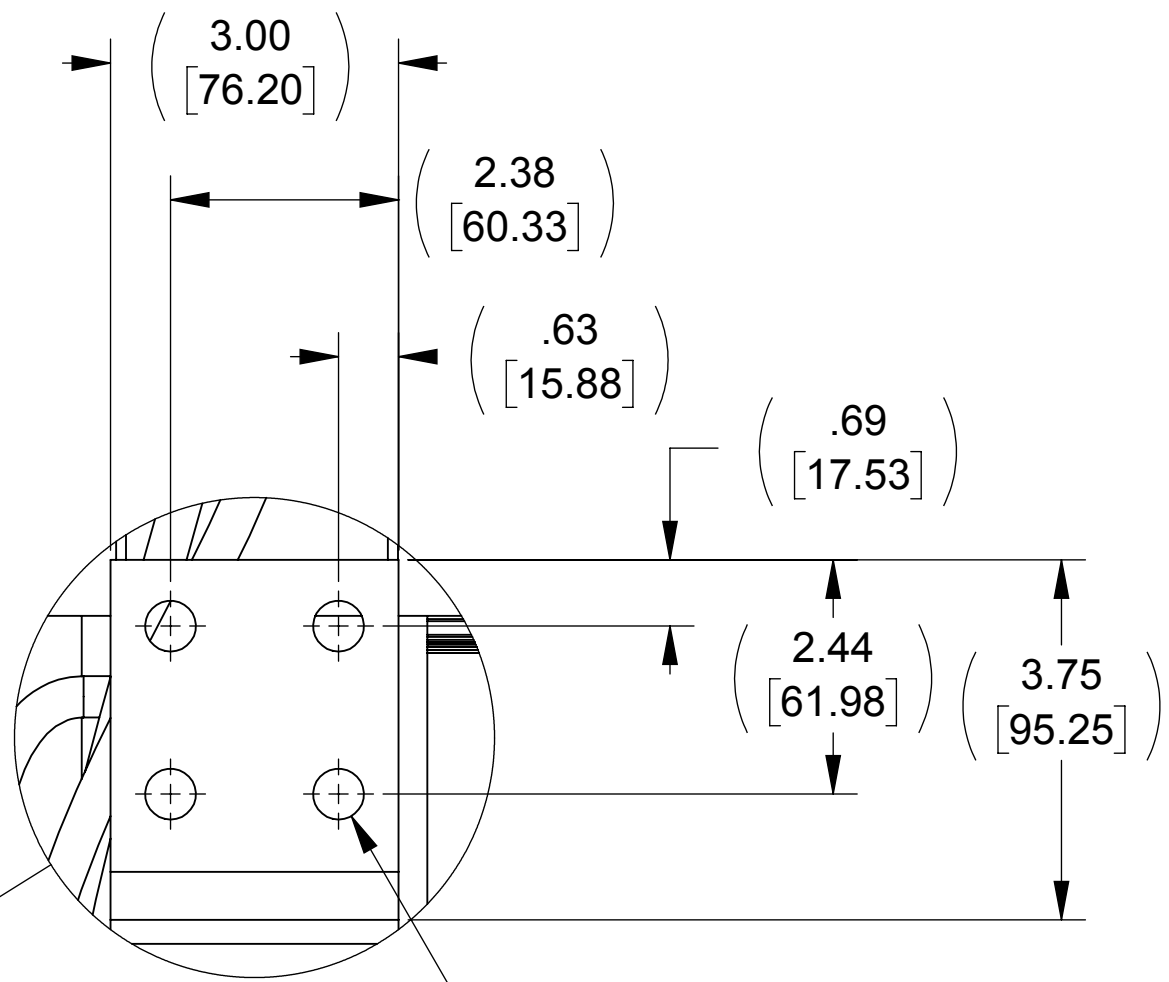


DETAIL A
(3 PLACES)

(\varnothing .53 [13.46] THRU.)
4 PLACES

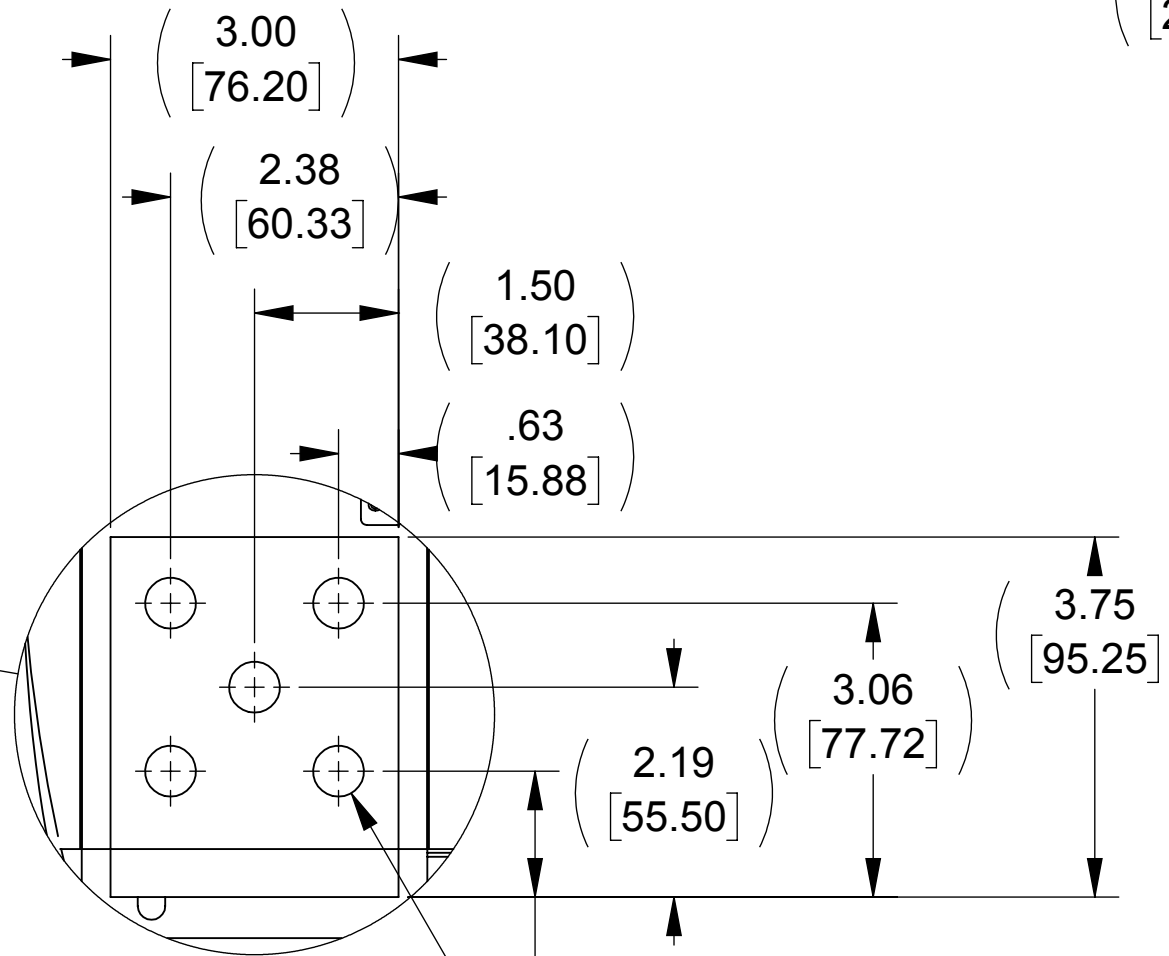


DETAIL B
(3 PLACES)

(\varnothing .53 [13.46] THRU.)
5 PLACES

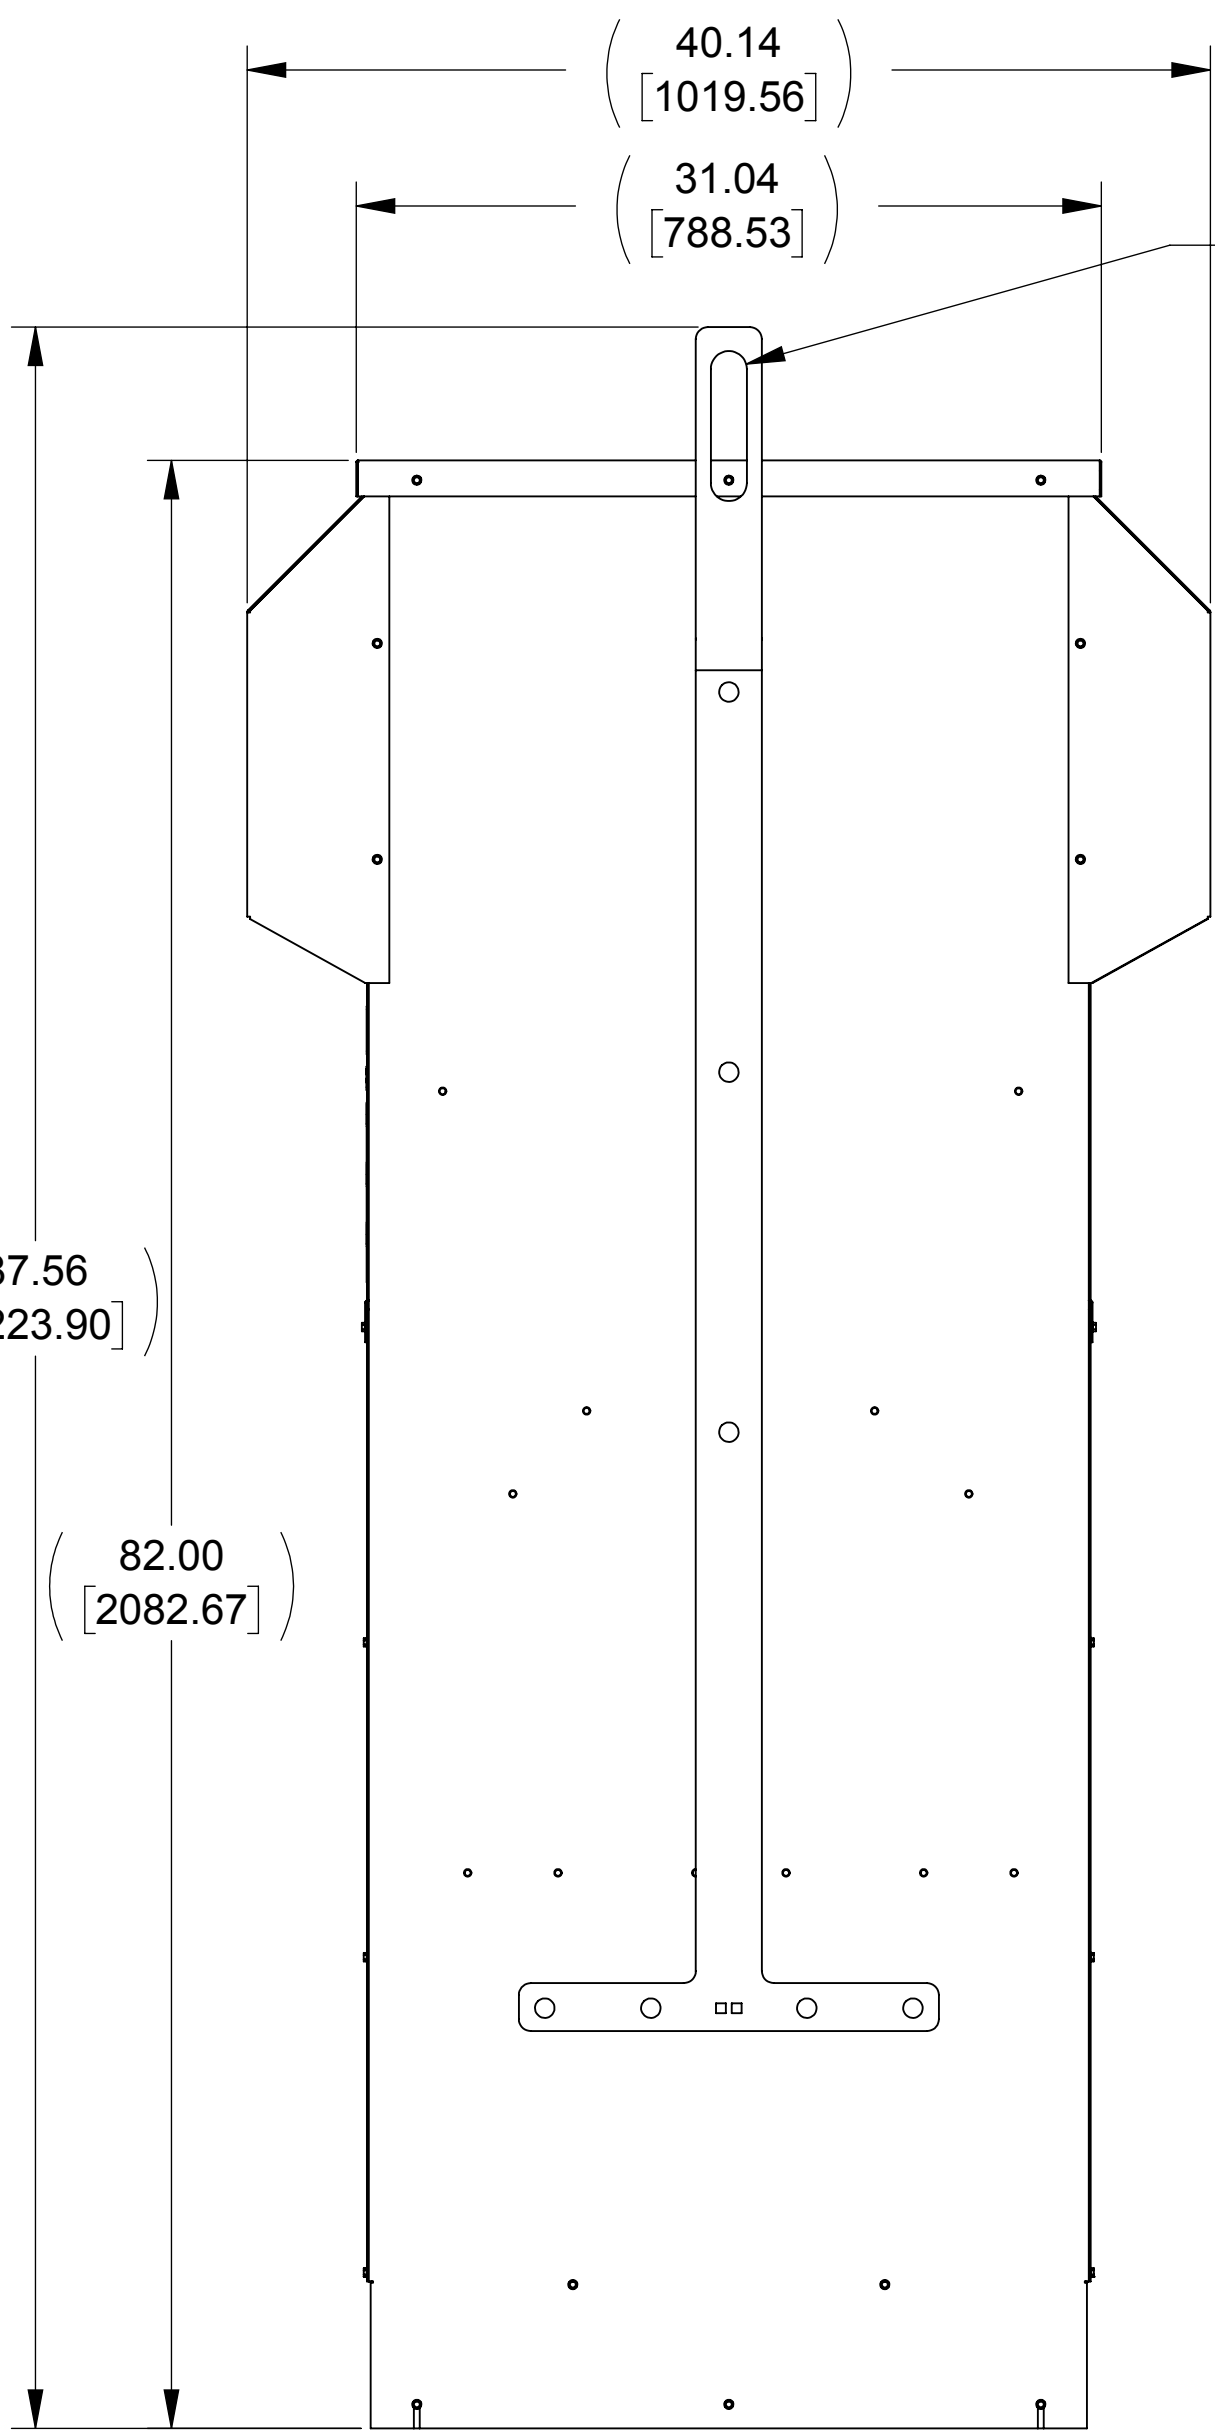

SIDE VIEW



(\varnothing 1.50 [38.10] X 6.25 [158.75])
SLOT, 2 PLACES

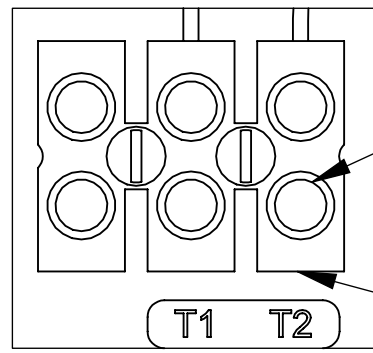

DETAIL C
CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

SEE NOTE 1

SEE NOTE 2

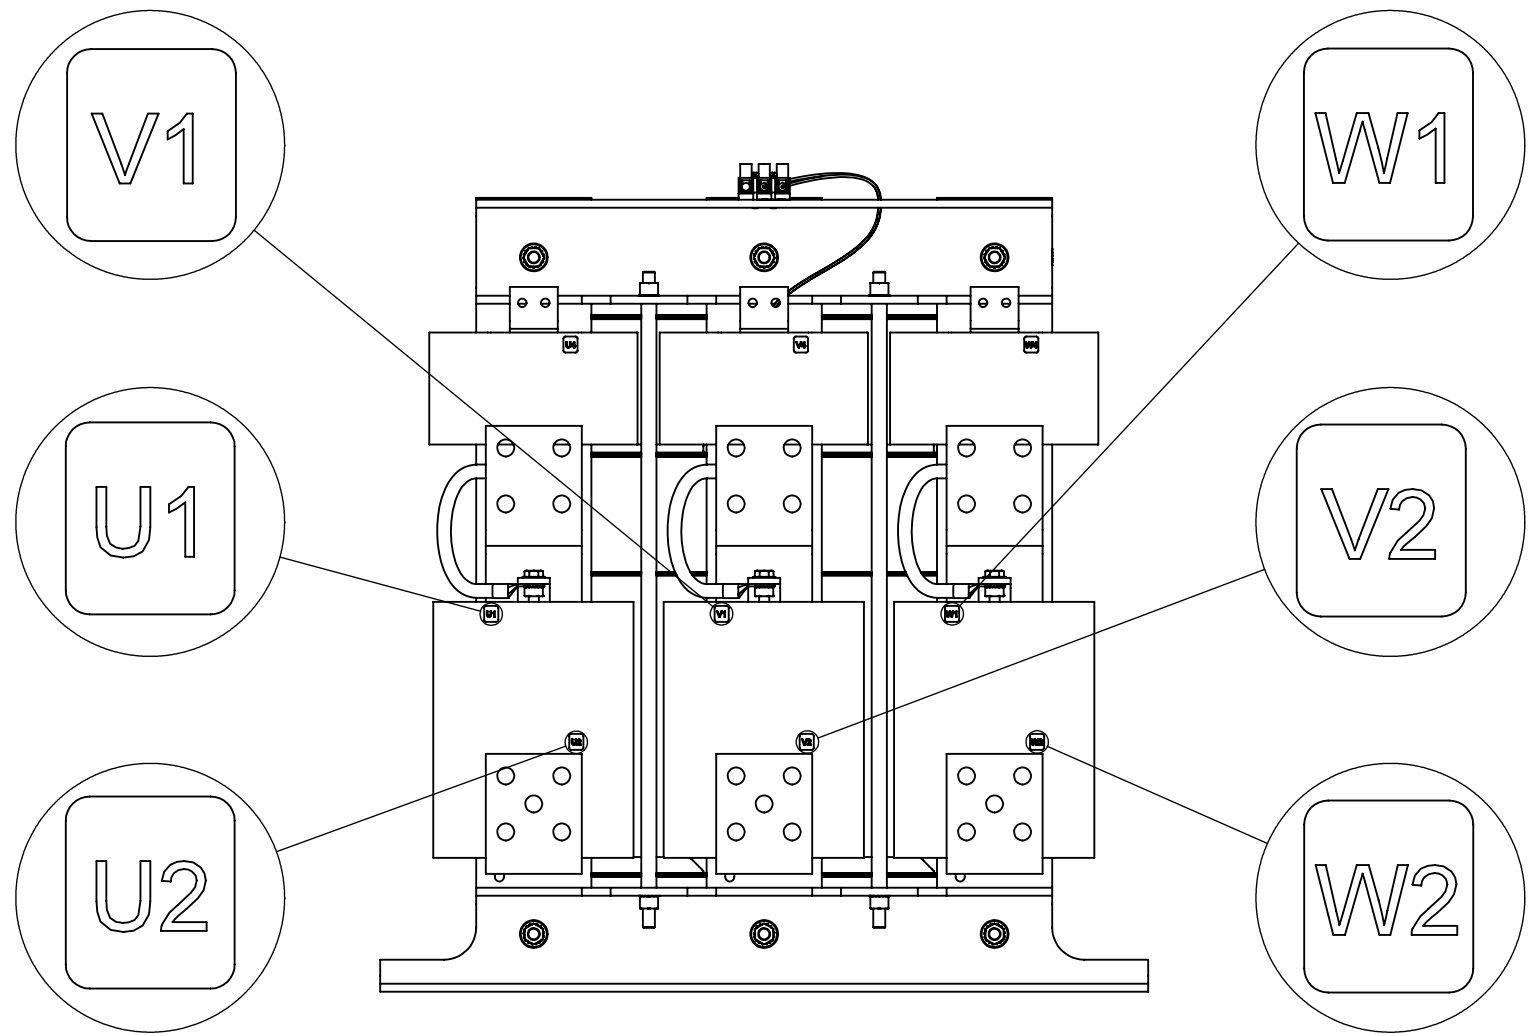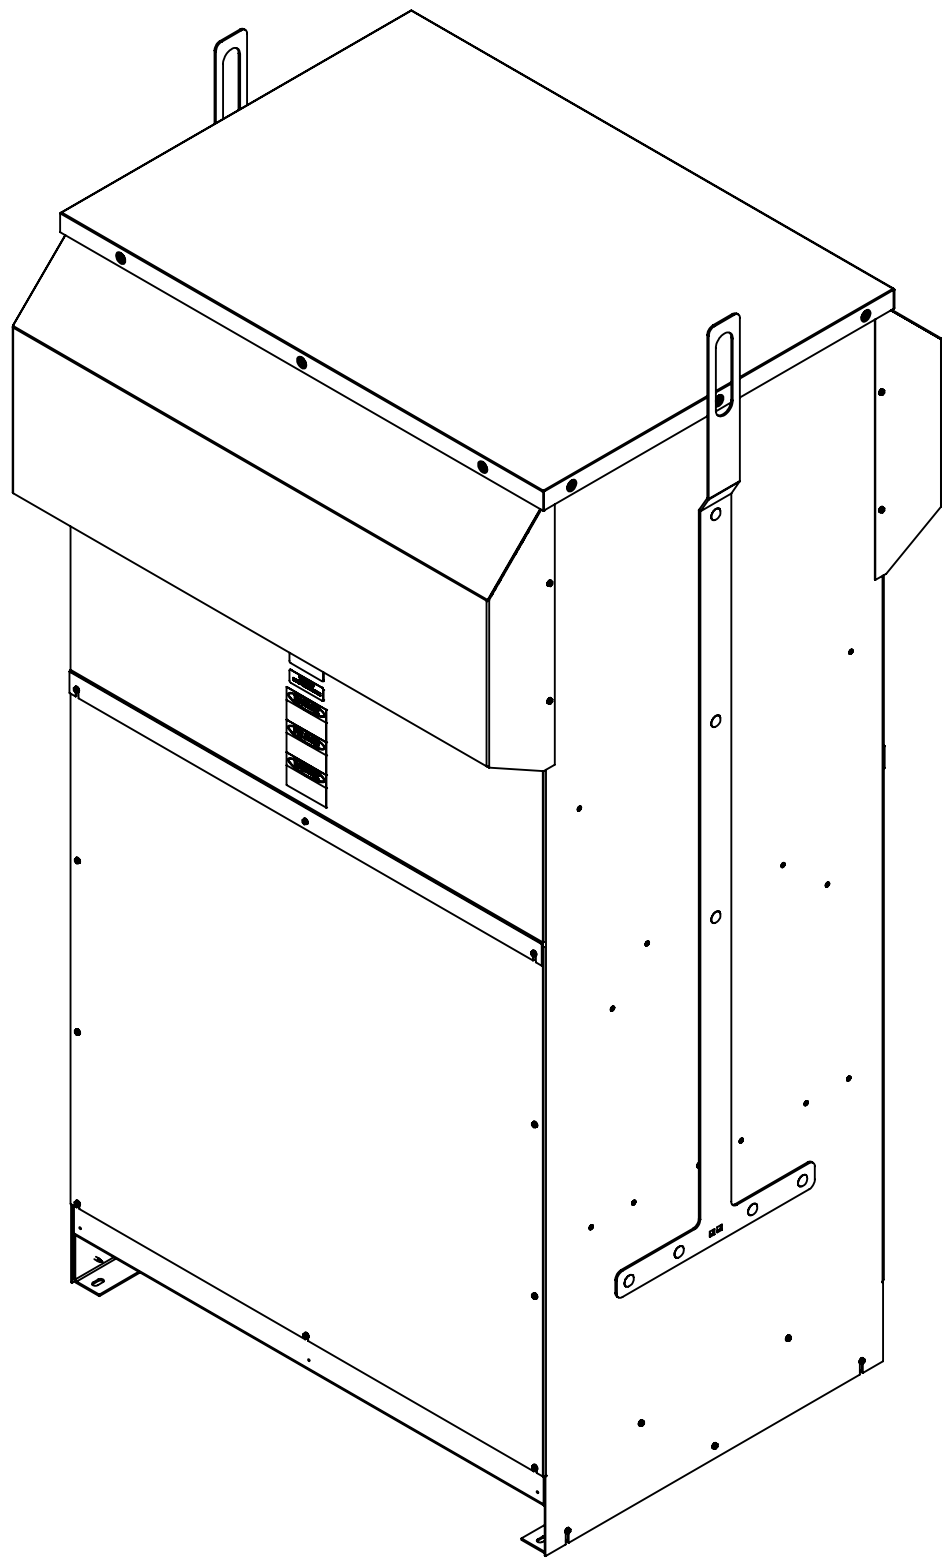

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
2. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: $\pm 1^\circ$ 1 PLACE .X: $\pm .1$ [2.5] 2 PLACE .XX: $\pm .01$ [0.25] 3 PLACE .XXX: $\pm .005$ [0.127]		DRAWN SU	DATE 05/17/13	MATRIX AP 636A 600V 60HZ FILTER, NEMA 3R ENCL		
		CHECKED JM	DATE 11/21/16			
		APPROVED JM	DATE 11/21/16			
				SIZE D	DWG No. CD MAPW0636E	REV 03
				SCALE 1:8	SHEET 1 OF 1	

