
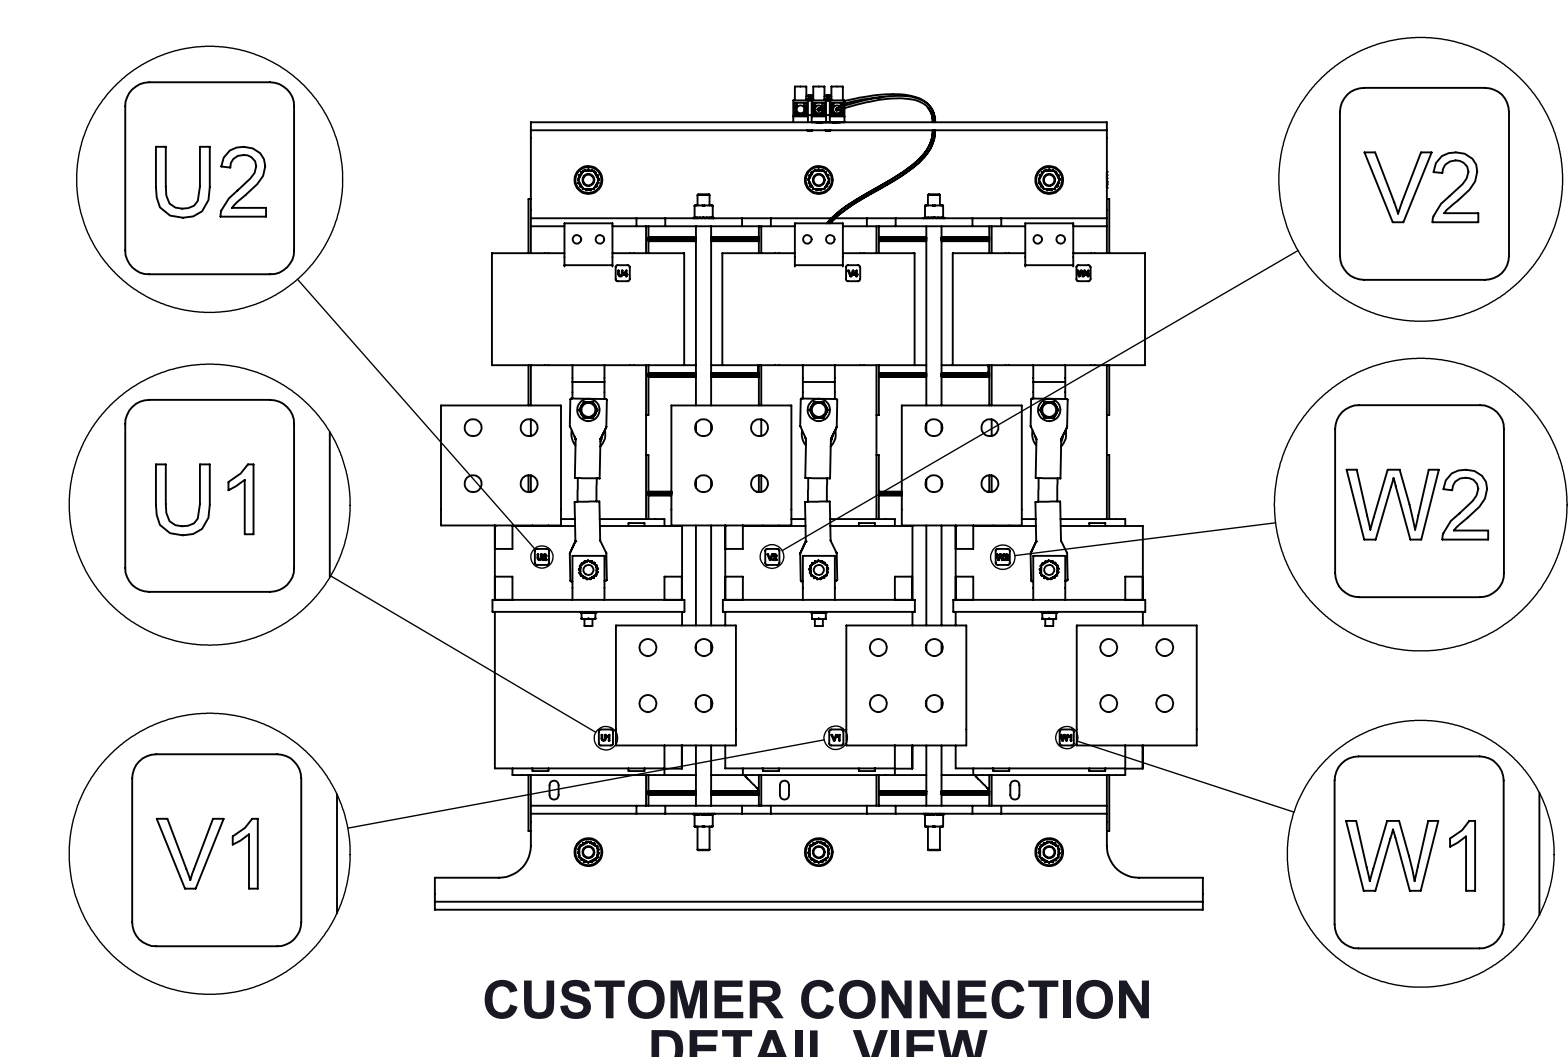



ECO No	DESCRIPTION	REV BY	DATE
M9921	REPLACED CAPPANEL-562 WITH CAPPANEL-562C	SL	01/04/17

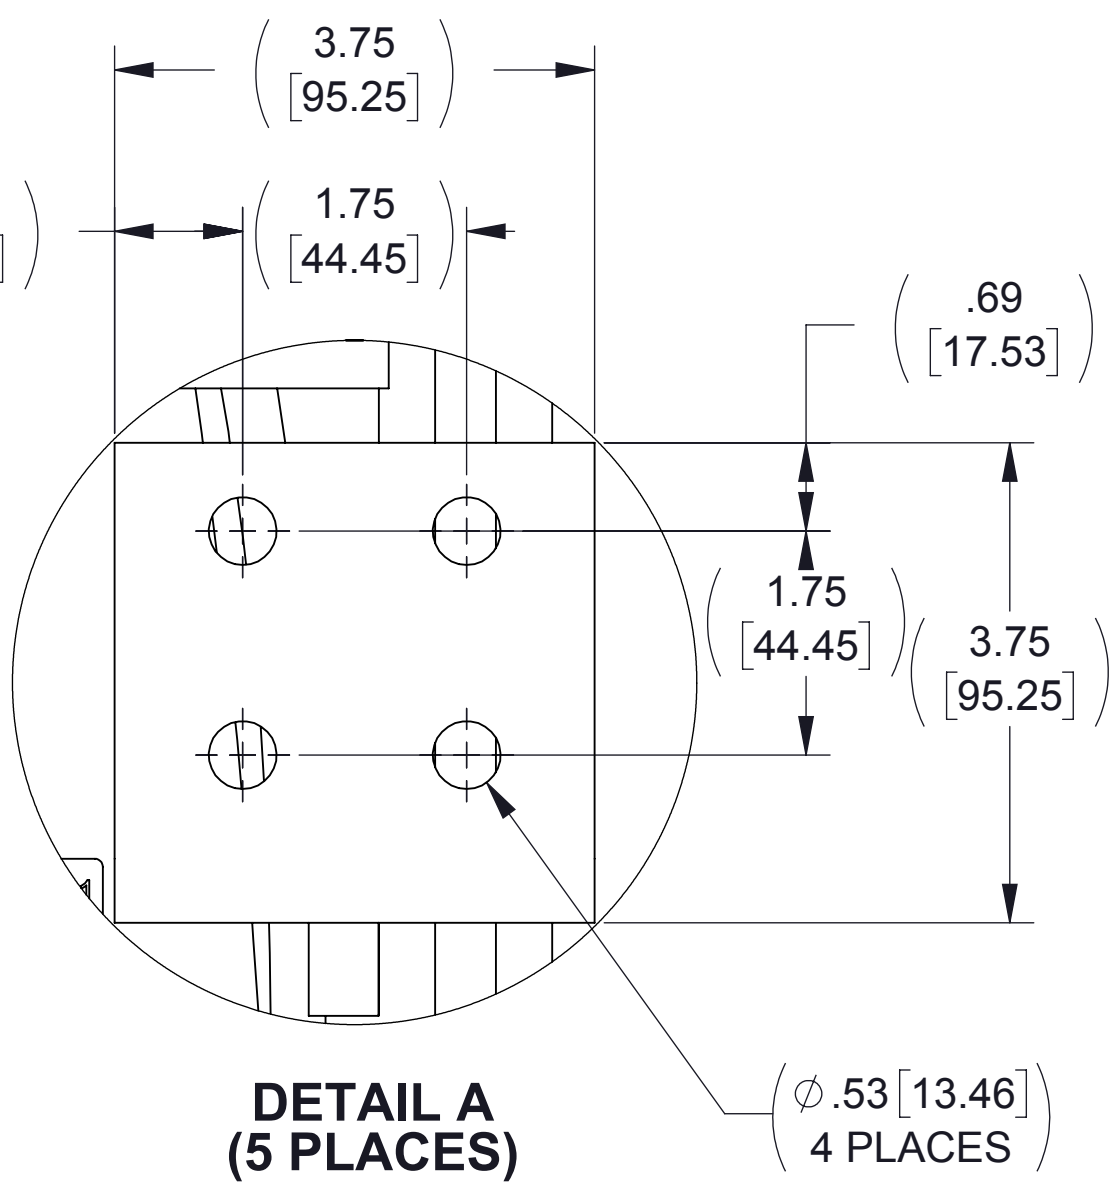

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS
  2. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:  ANGLES: ± 1 °  1 PLACE .X: ± .1 [2.5]  2 PLACE .XX: ± .03 [0.76]  3 PLACE .XXX: ± .010 [0.254]		  N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200		MATRIX AP 786A 480V 60HZ FILTER, NEMA 3R ENCLOSURE		
		DRAWN SG	DATE 09/30/11	SIZE D	DWG No. CD MAPW0786D	REV 06
		CHECKED JM	DATE 02/08/17			
		APPROVED JM	DATE 02/08/17	SCALE 1:8	SHEET 1 OF 1	