



WEIGHT (LBS)
29

ECO No	DESCRIPTION	REV BY	DATE
M11976	CORRECTED DISASSOCIATED DIMENSIONS	WF	09/18/19

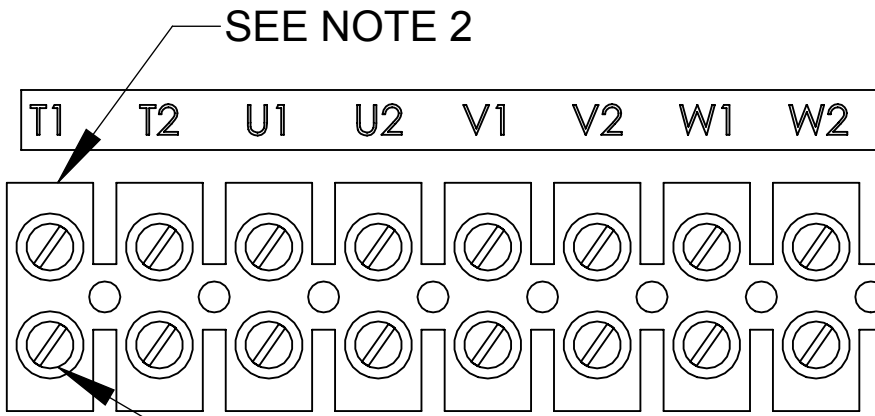

SEE NOTE 1
CUSTOMER CONNECTION
DETAIL VIEW

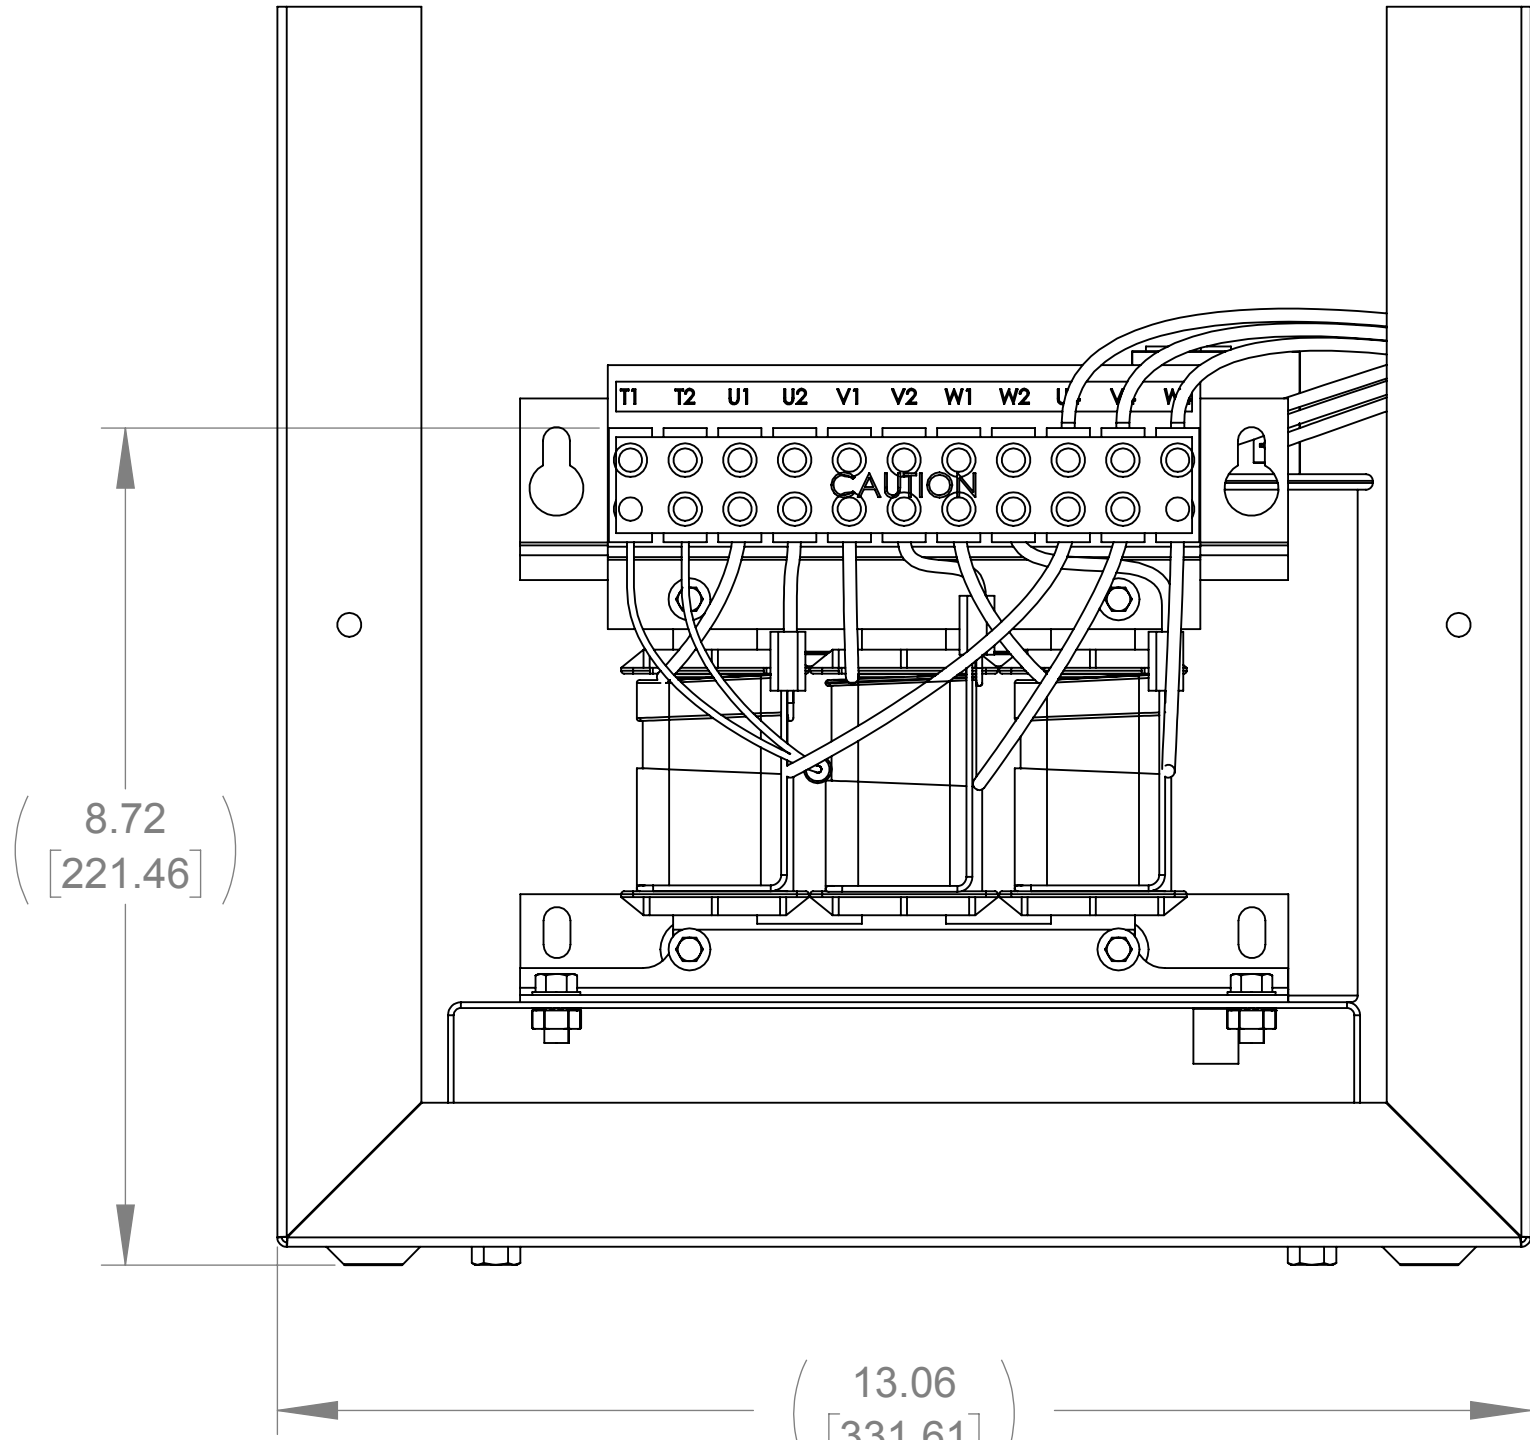


FRONT VIEW
(FRONT PANEL REMOVED)


03

13.17
[334.49]


Ø.31
[7.87]
4 PLACES

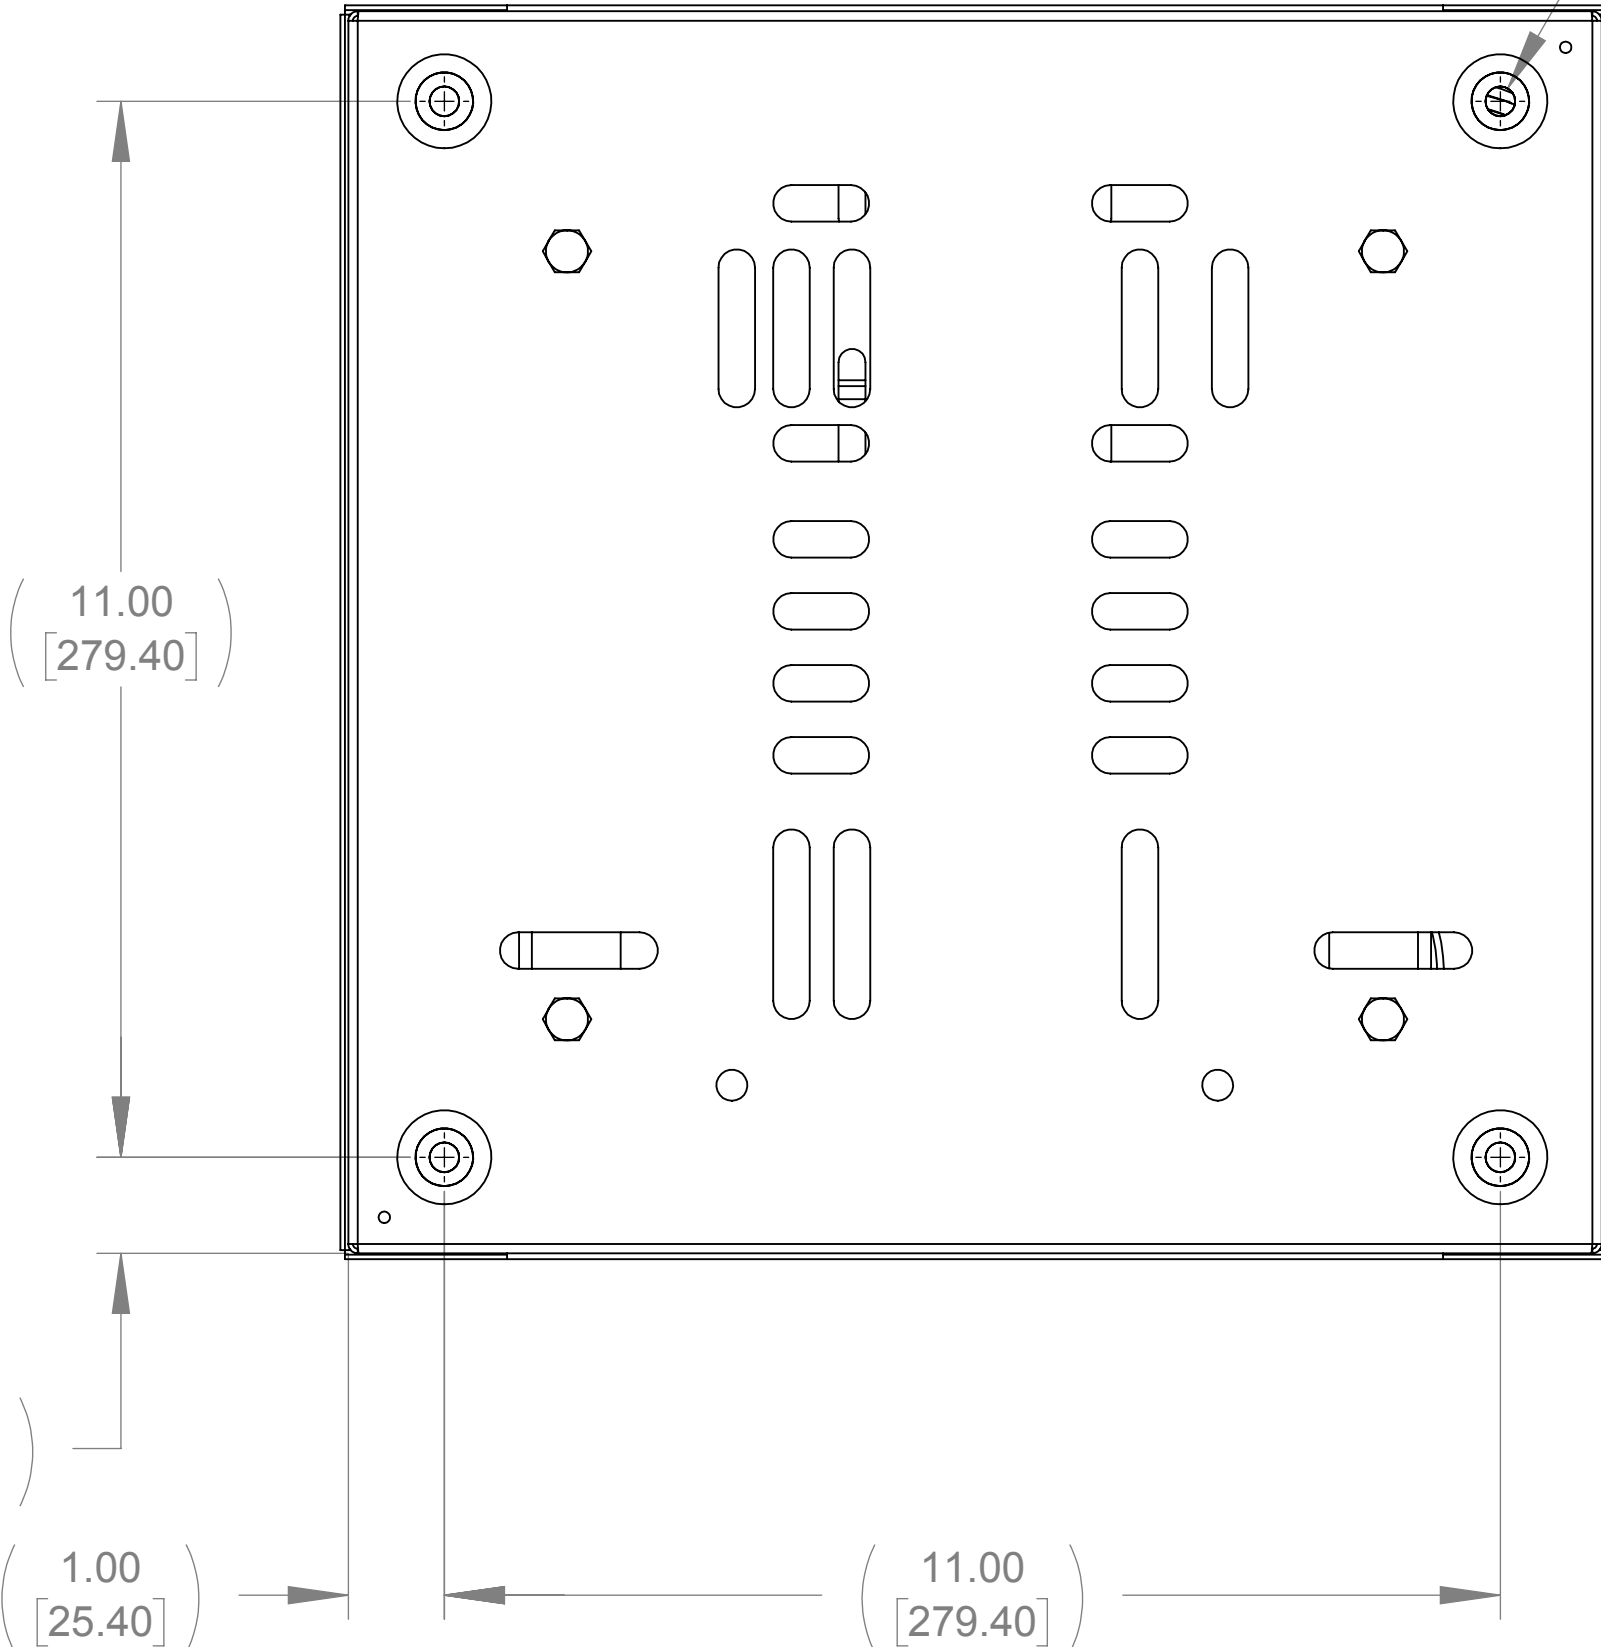

BOTTOM VIEW

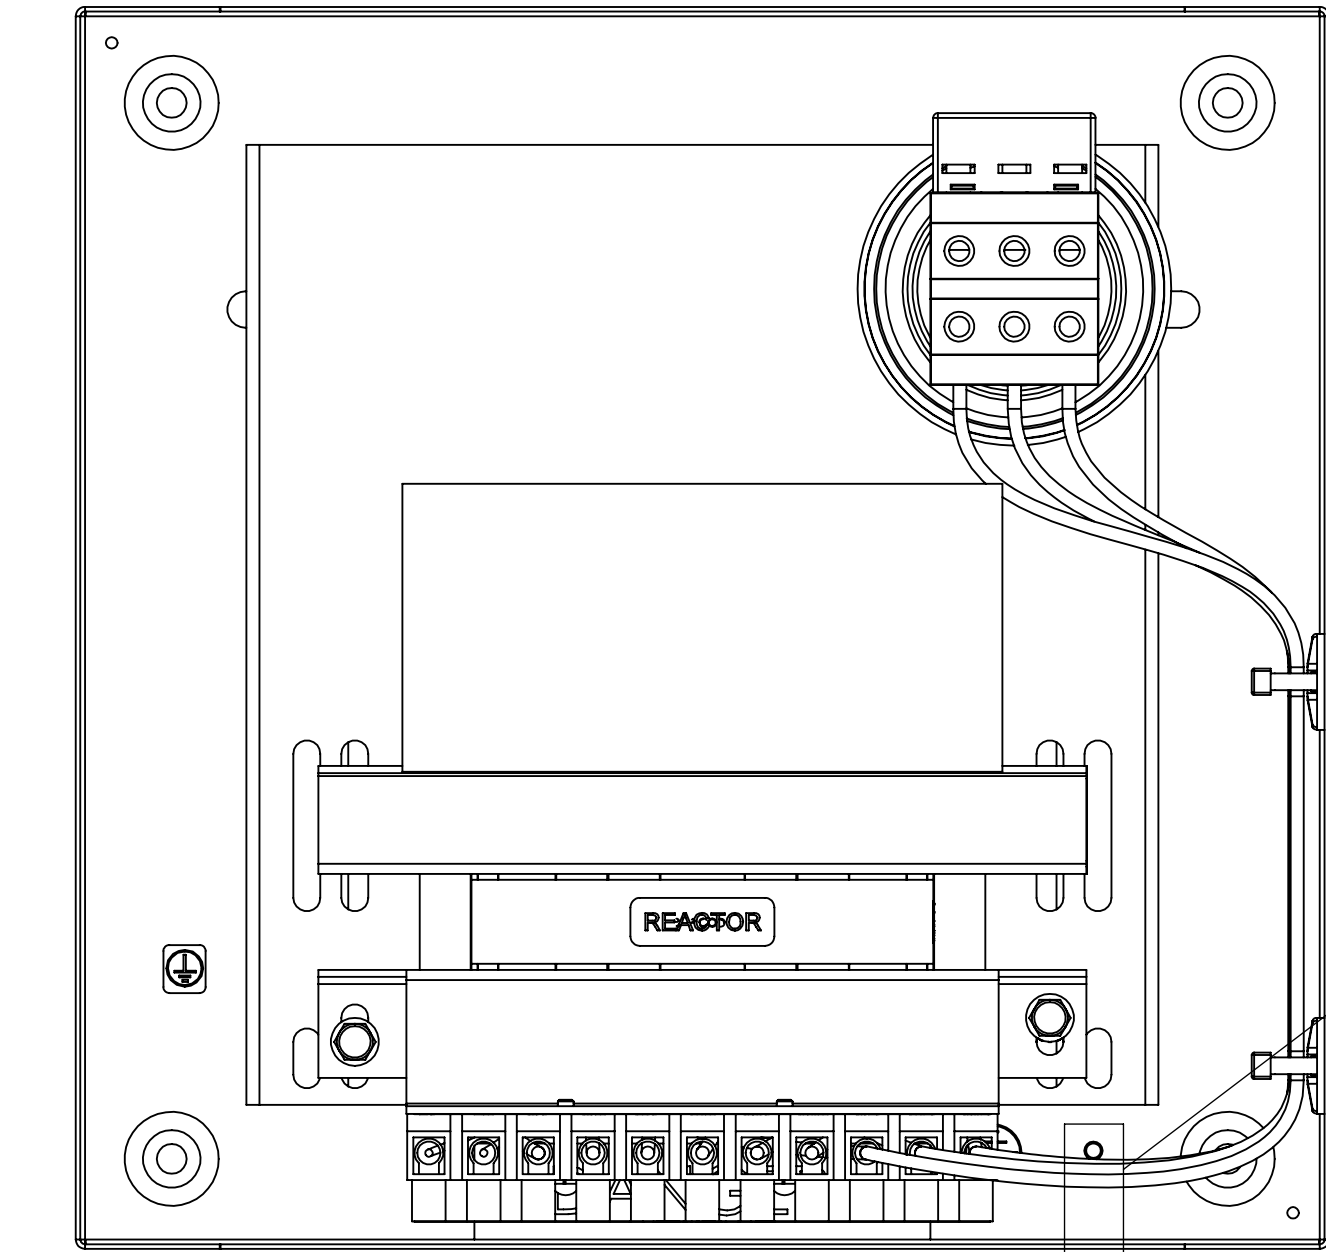

TOP VIEW
(TOP HAT REMOVED)

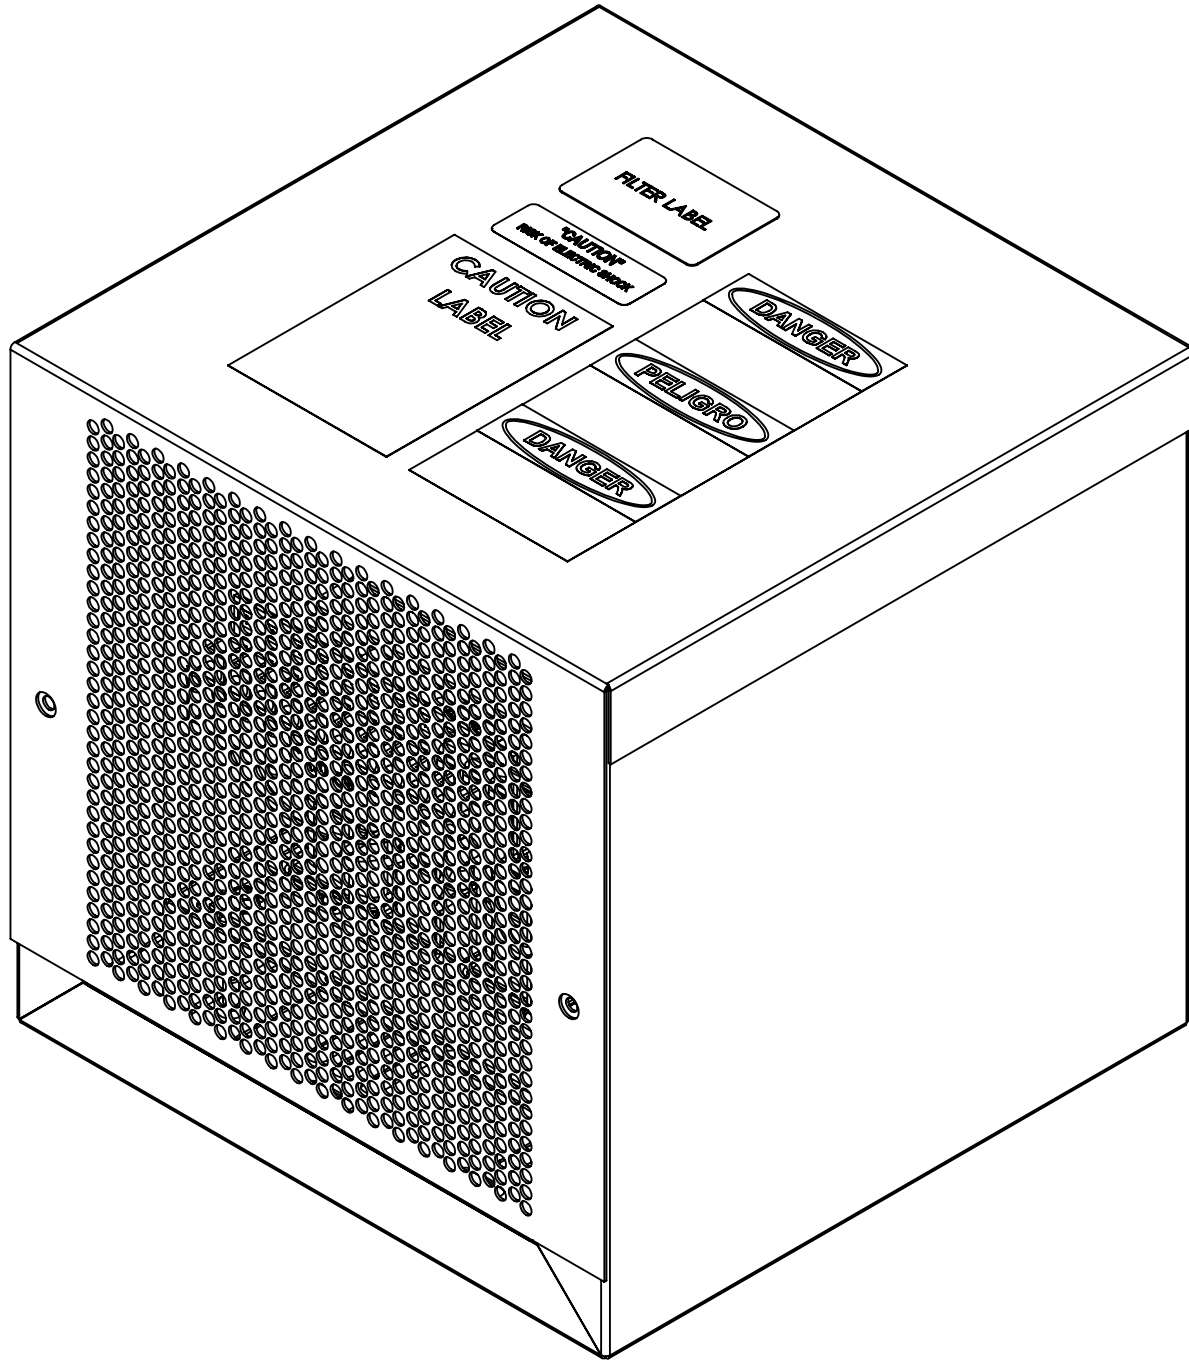

- NOTES:
1. TIGHTEN TERMINAL BLOCK SCREWS TO 16 IN/LBS. TORQUE, MAX.
2. TERMINAL WIRE SIZE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2			MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION					DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]			DRAWN MN	DATE 09/19/13	SWG 5A 380-480V 2-8kHz FILTER NEMA 1/2		
			CHECKED WF	DATE 09/18/19			
			APPROVED AK	DATE 09/19/19			
			SIZE D	DWG No. CD SWGG0005D	REV 03		
			SCALE 1:2	SHEET 1 OF 1			

MTE
POWER QUALITY. SOLVED.

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200