



WEIGHT (LBS)
31

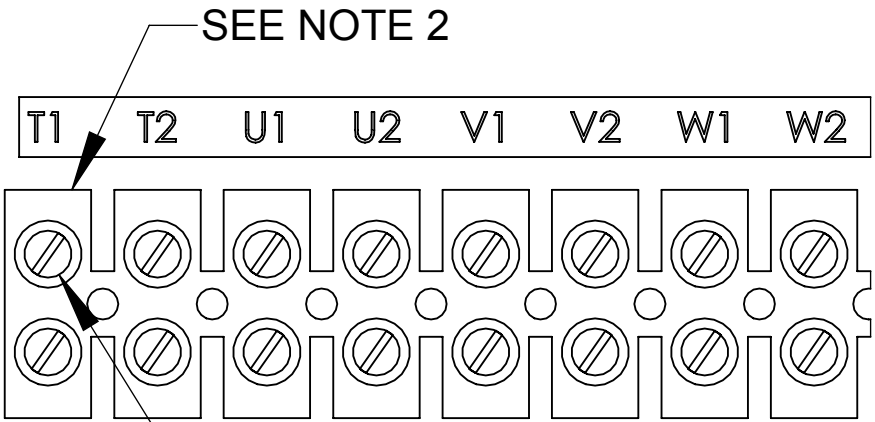

CUSTOMER CONNECTION
DETAIL VIEW


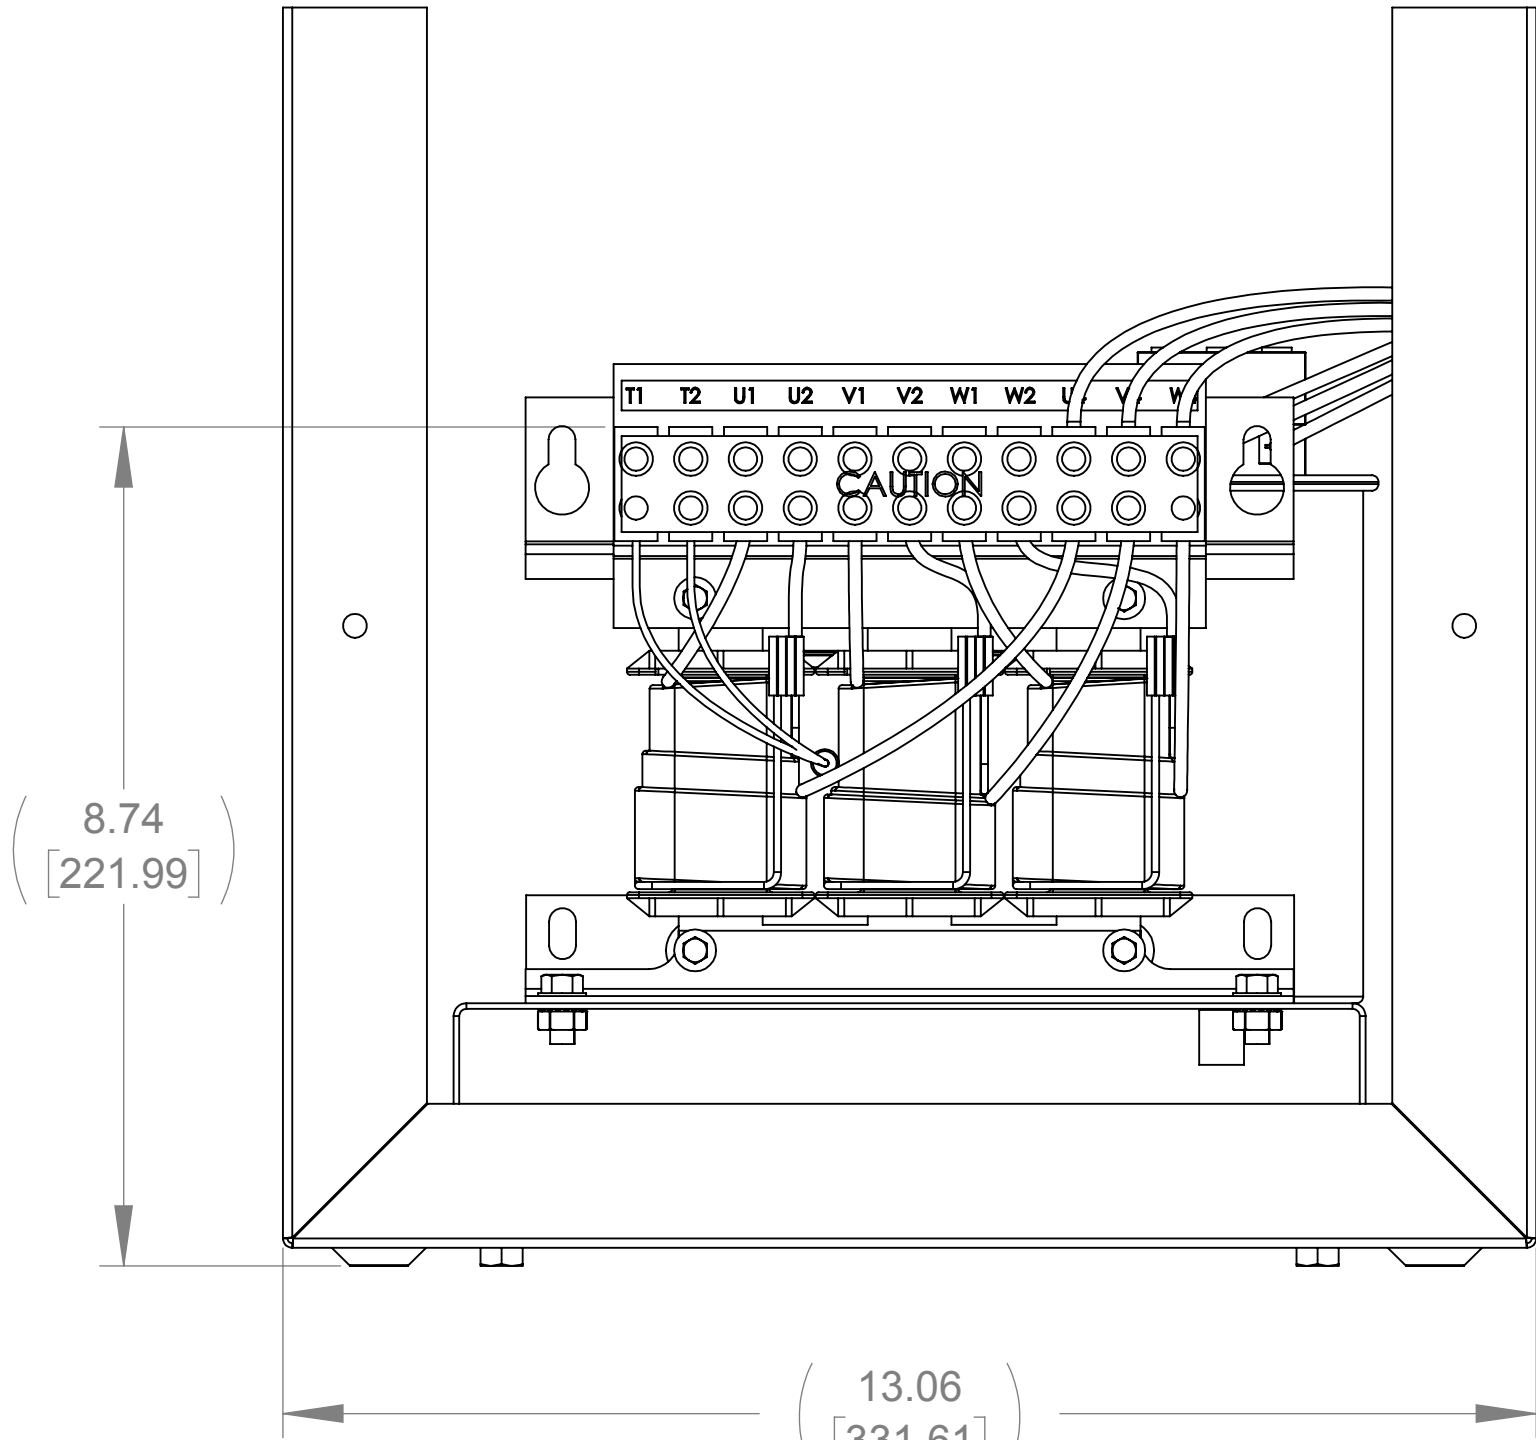


FRONT VIEW
(FRONT PANEL REMOVED)

03


13.17
[334.49]

RIGHT SIDE VIEW

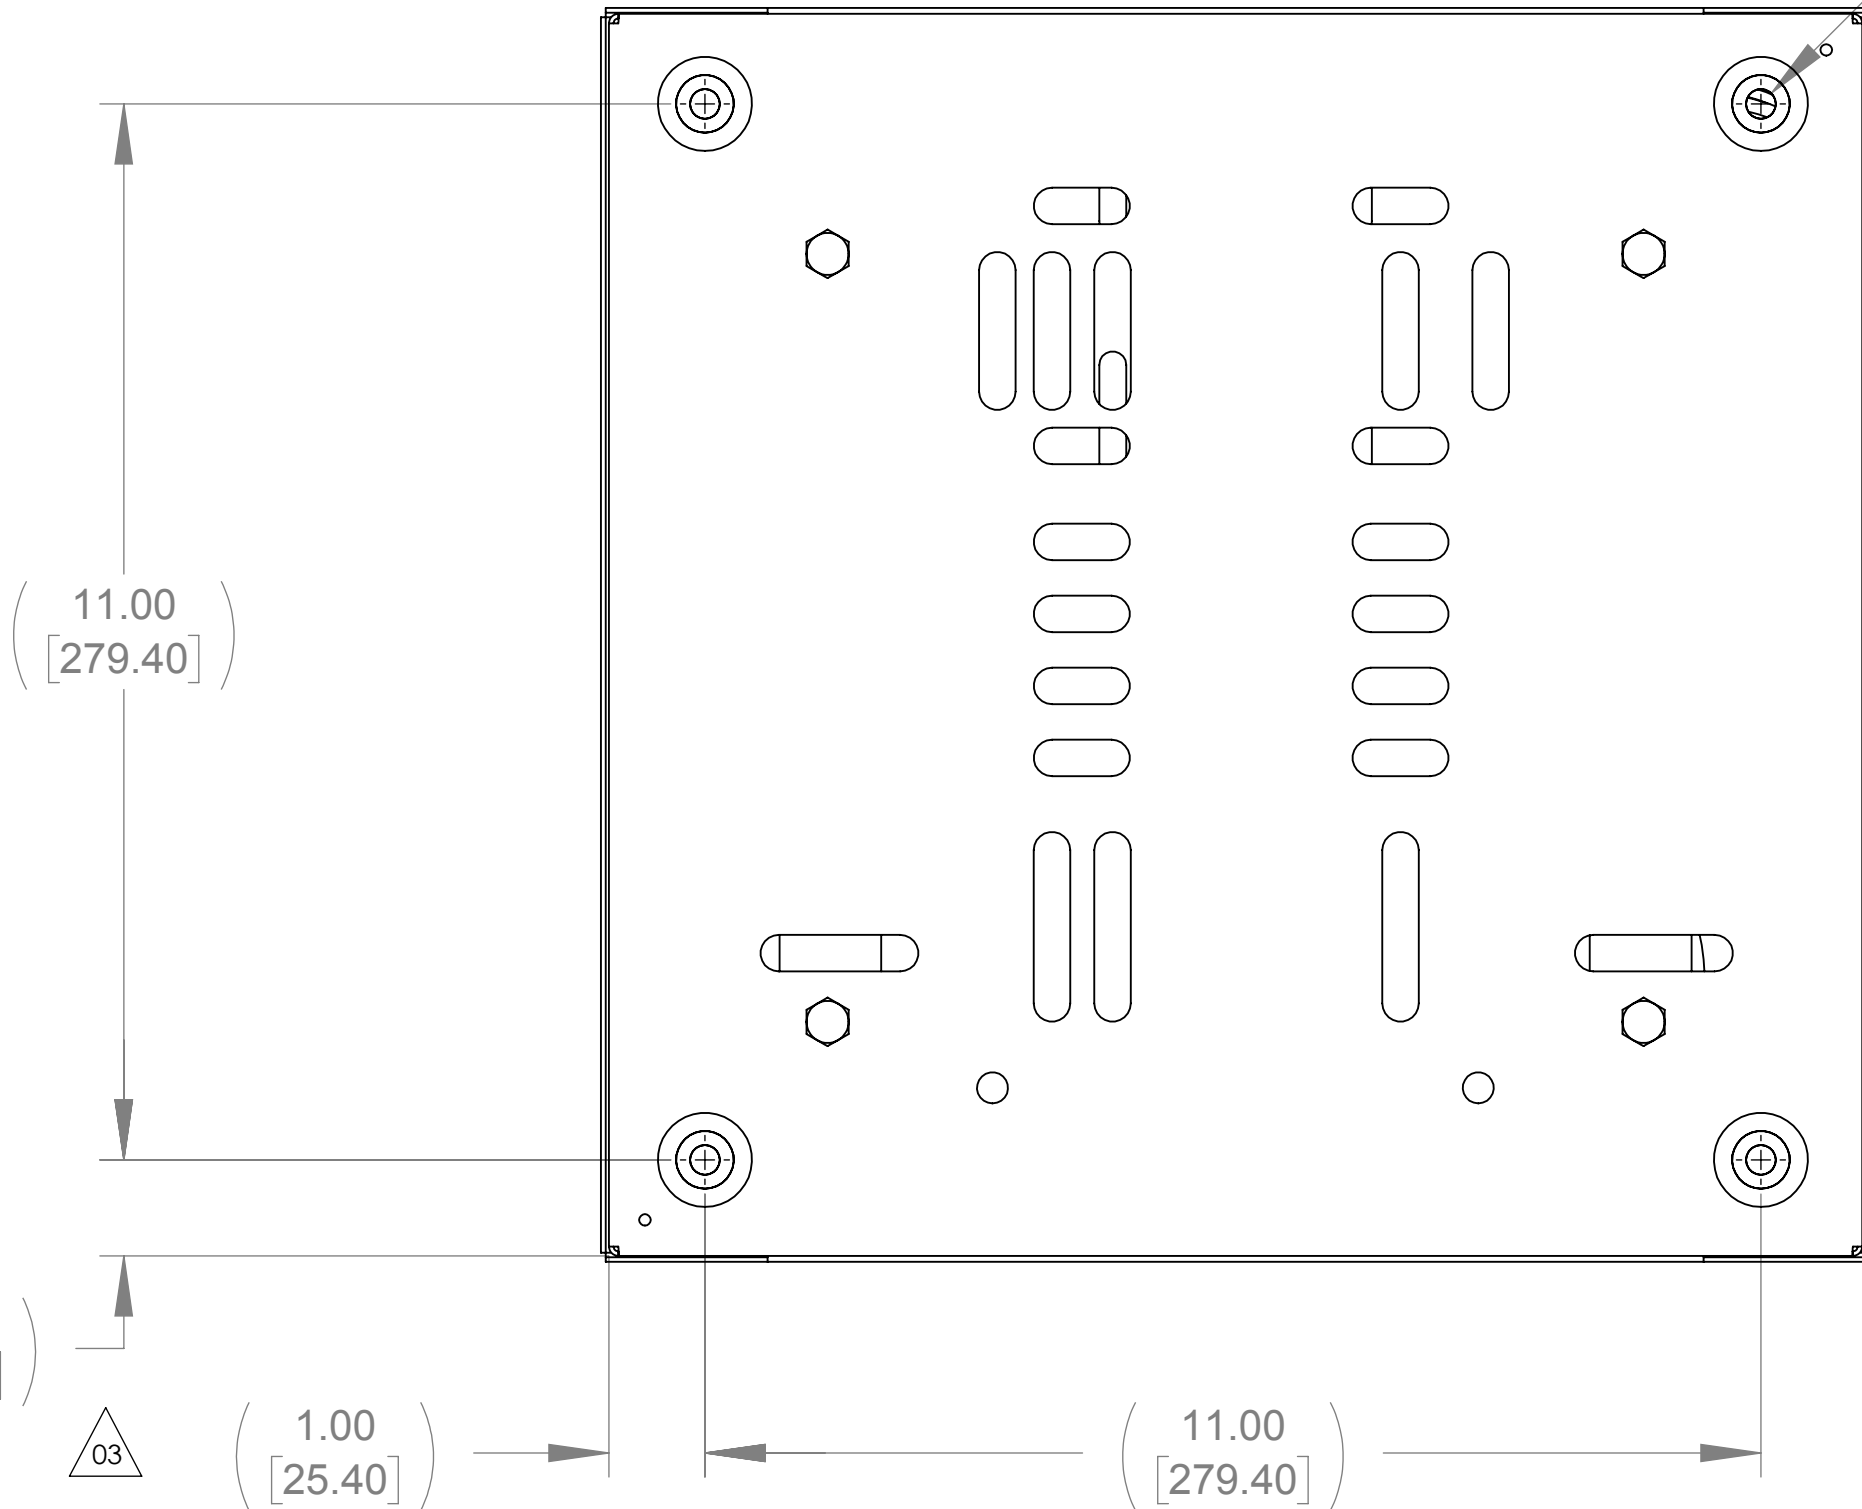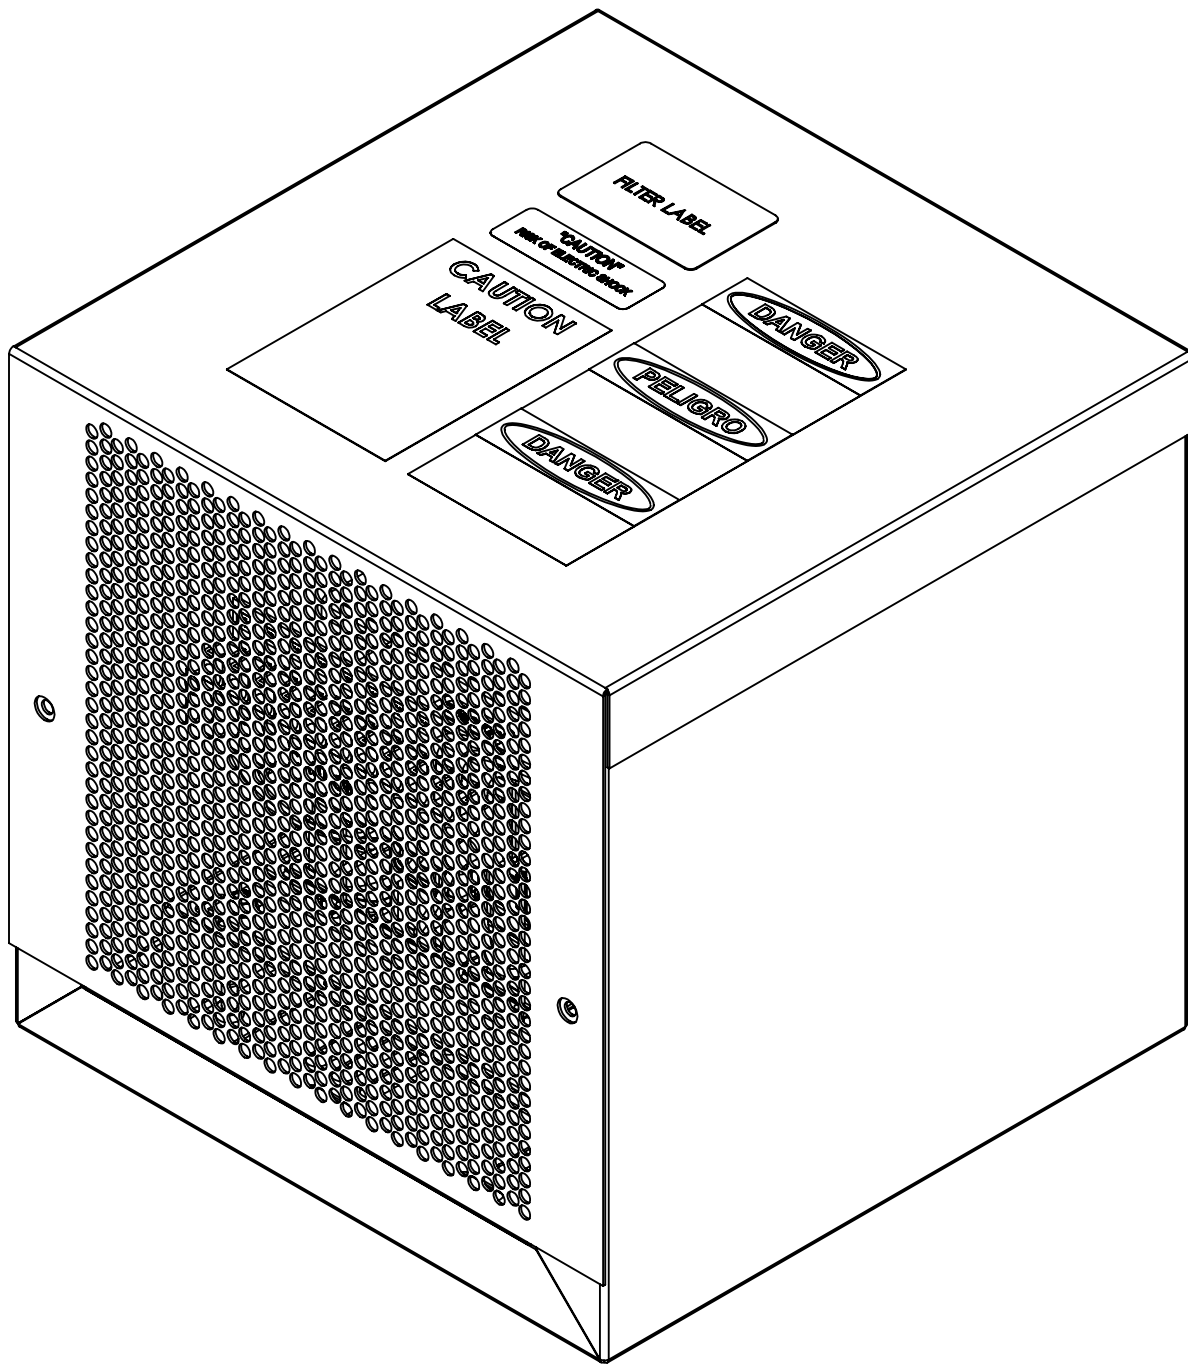

BOTTOM VIEW

Ø.31
[7.87]
4 PLACES

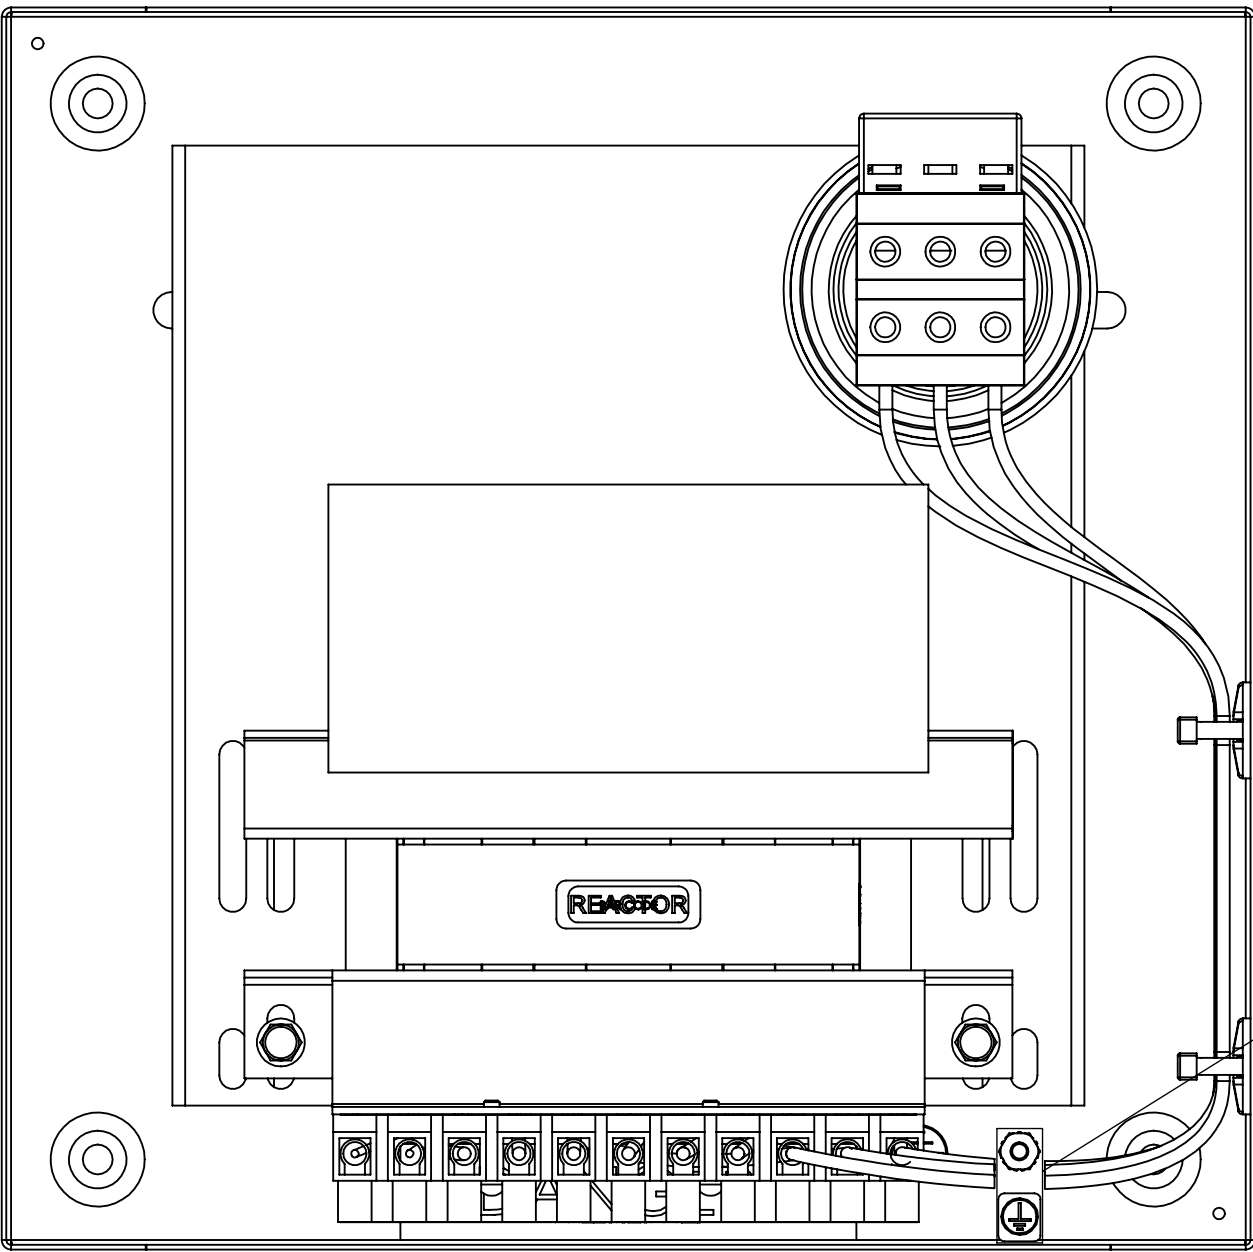

TOP VIEW
(TOP HAT REMOVED)

- NOTES:
1. TIGHTEN TERMINAL BLOCK SCREWS TO 16 IN/LBS. TORQUE, MAX.
2. TERMINAL WIRE SIZE: 4-14 AWG.

| | | | | | |
|--|--|---|------------------|--|--------------|
| THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2 | | MATERIAL | | CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION | |
| CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION | | | | DESCRIPTION | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254] | | MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200 | | SWG 9A 380-480V 2-8kHz FILTER NEMA 1/2 | |
| | | DRAWN MN | DATE 09/18/13 | SIZE D | REV |
| | | CHECKED WF | DATE 09/18/19 | DWG No. CD SWGG0009D | |
| | | APPROVED | DATE | SCALE 1:2 | SHEET 1 OF 1 |