



APPROX. WEIGHT
(LBS)
34



ECO No	DESCRIPTION	REV BY	DATE

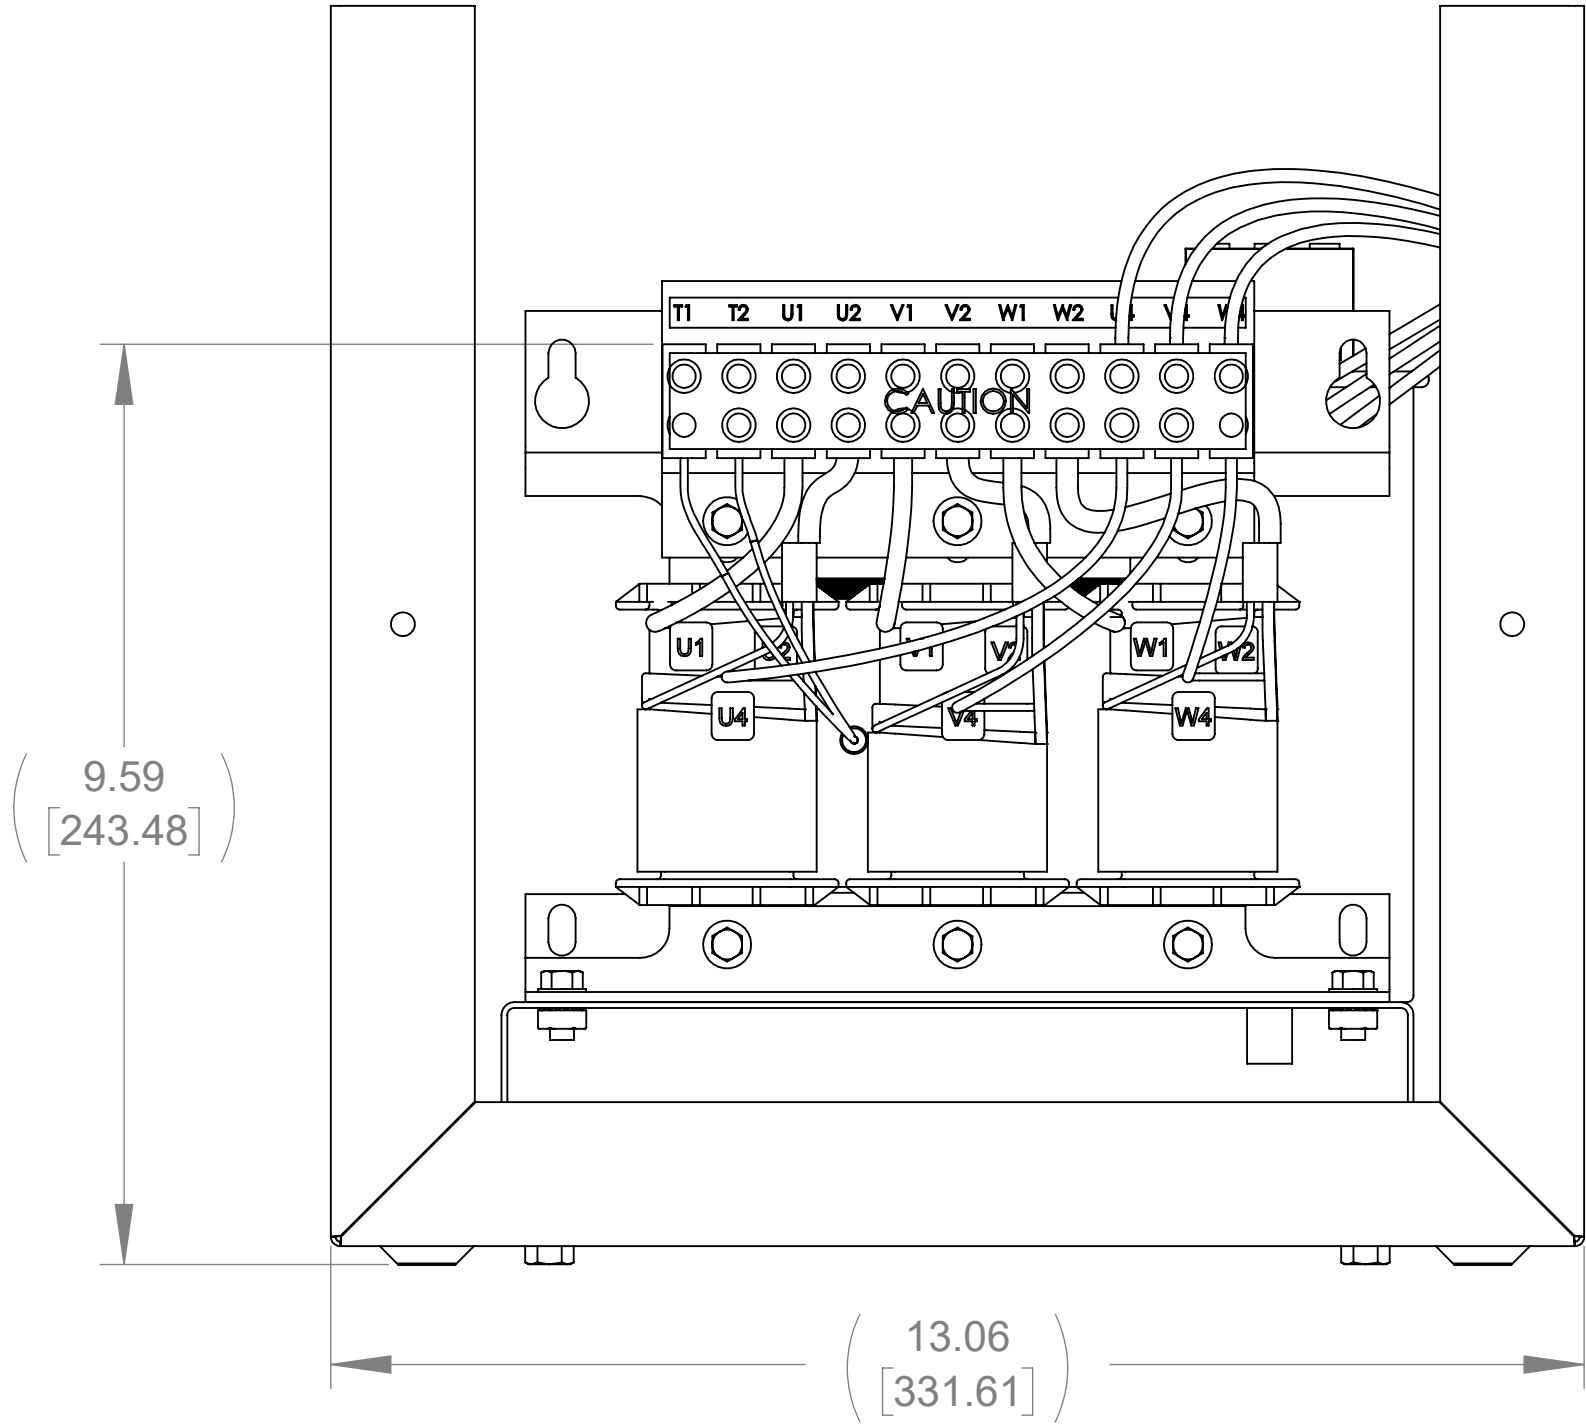


FRONT VIEW
(PANELS REMOVED)

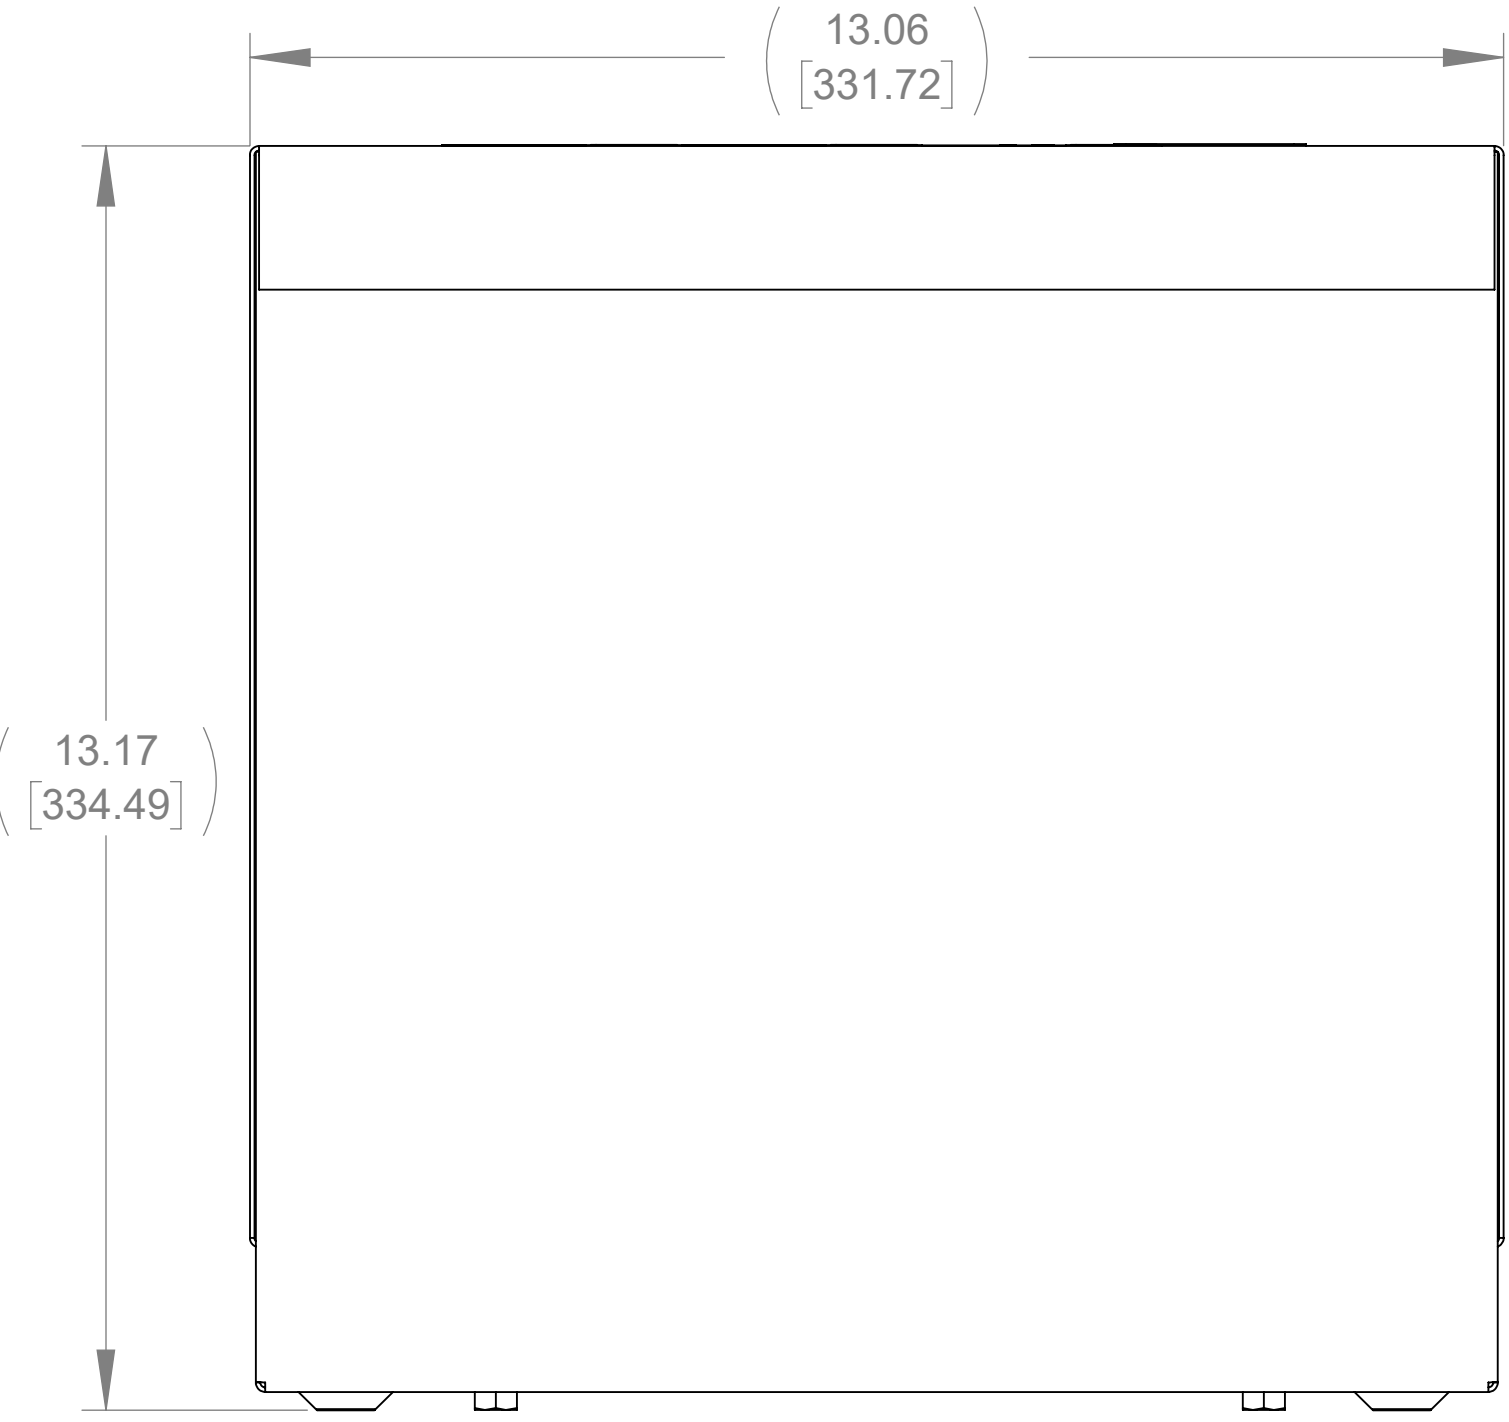


RIGHT SIDE VIEW

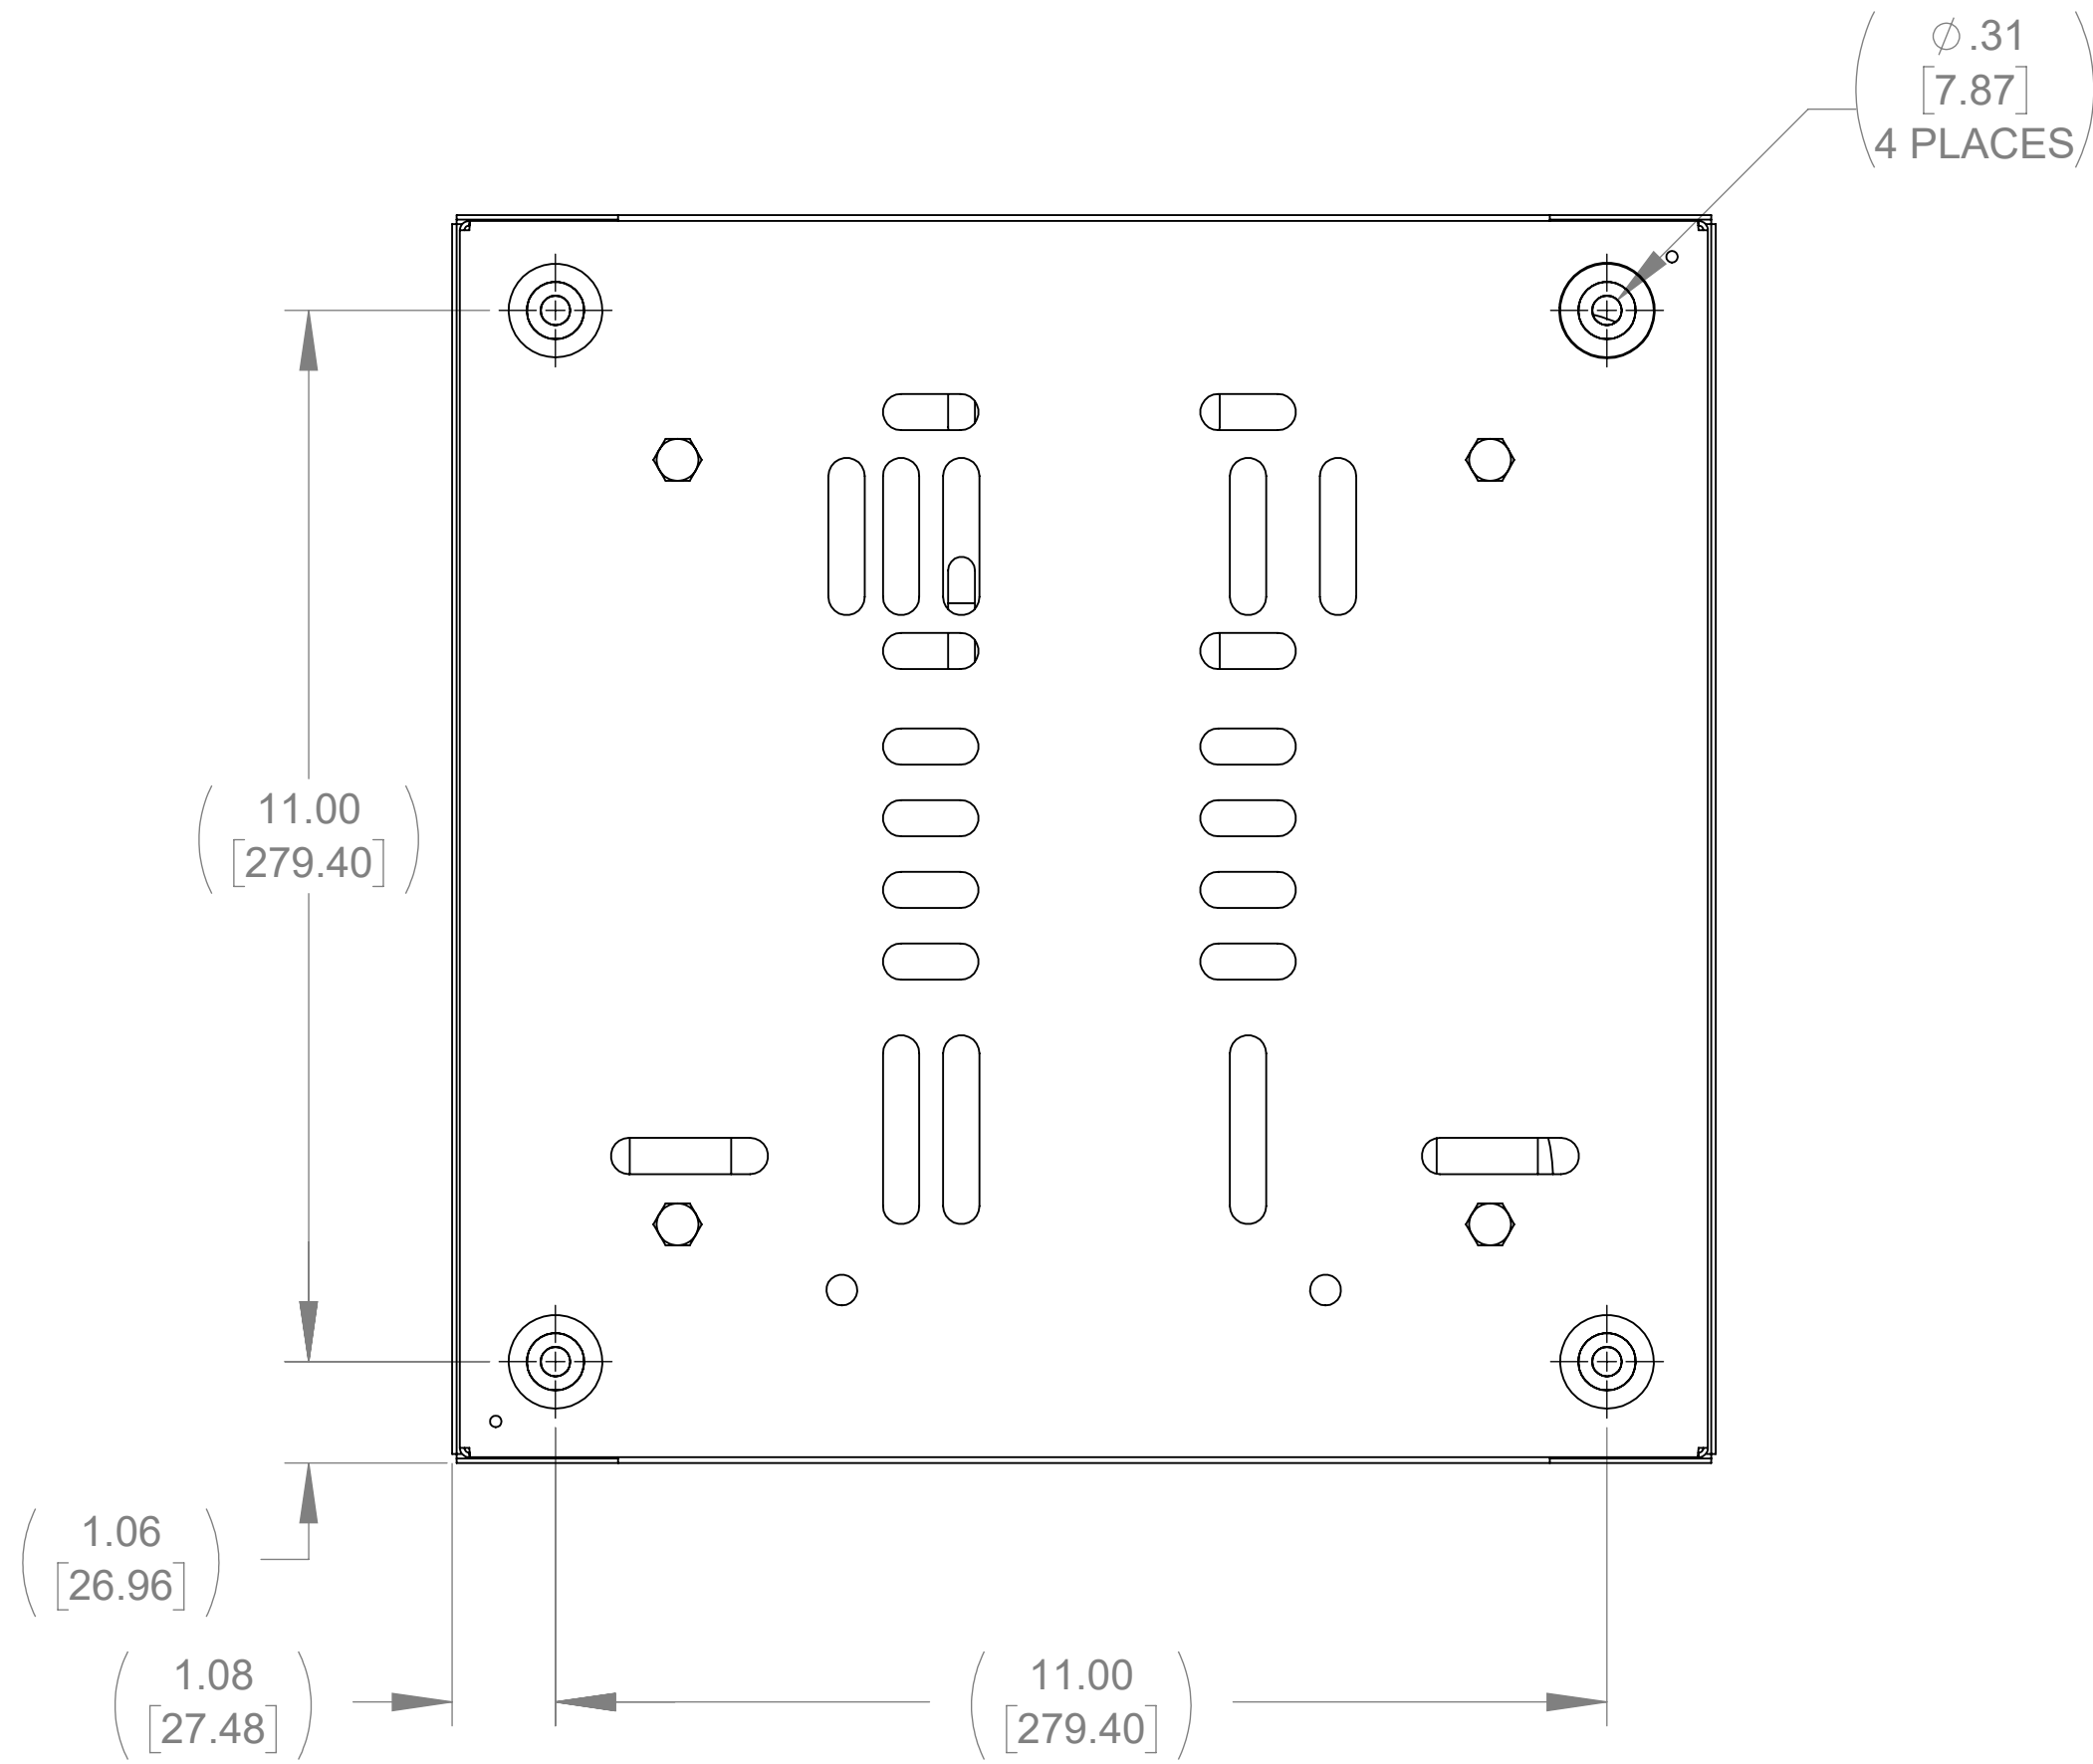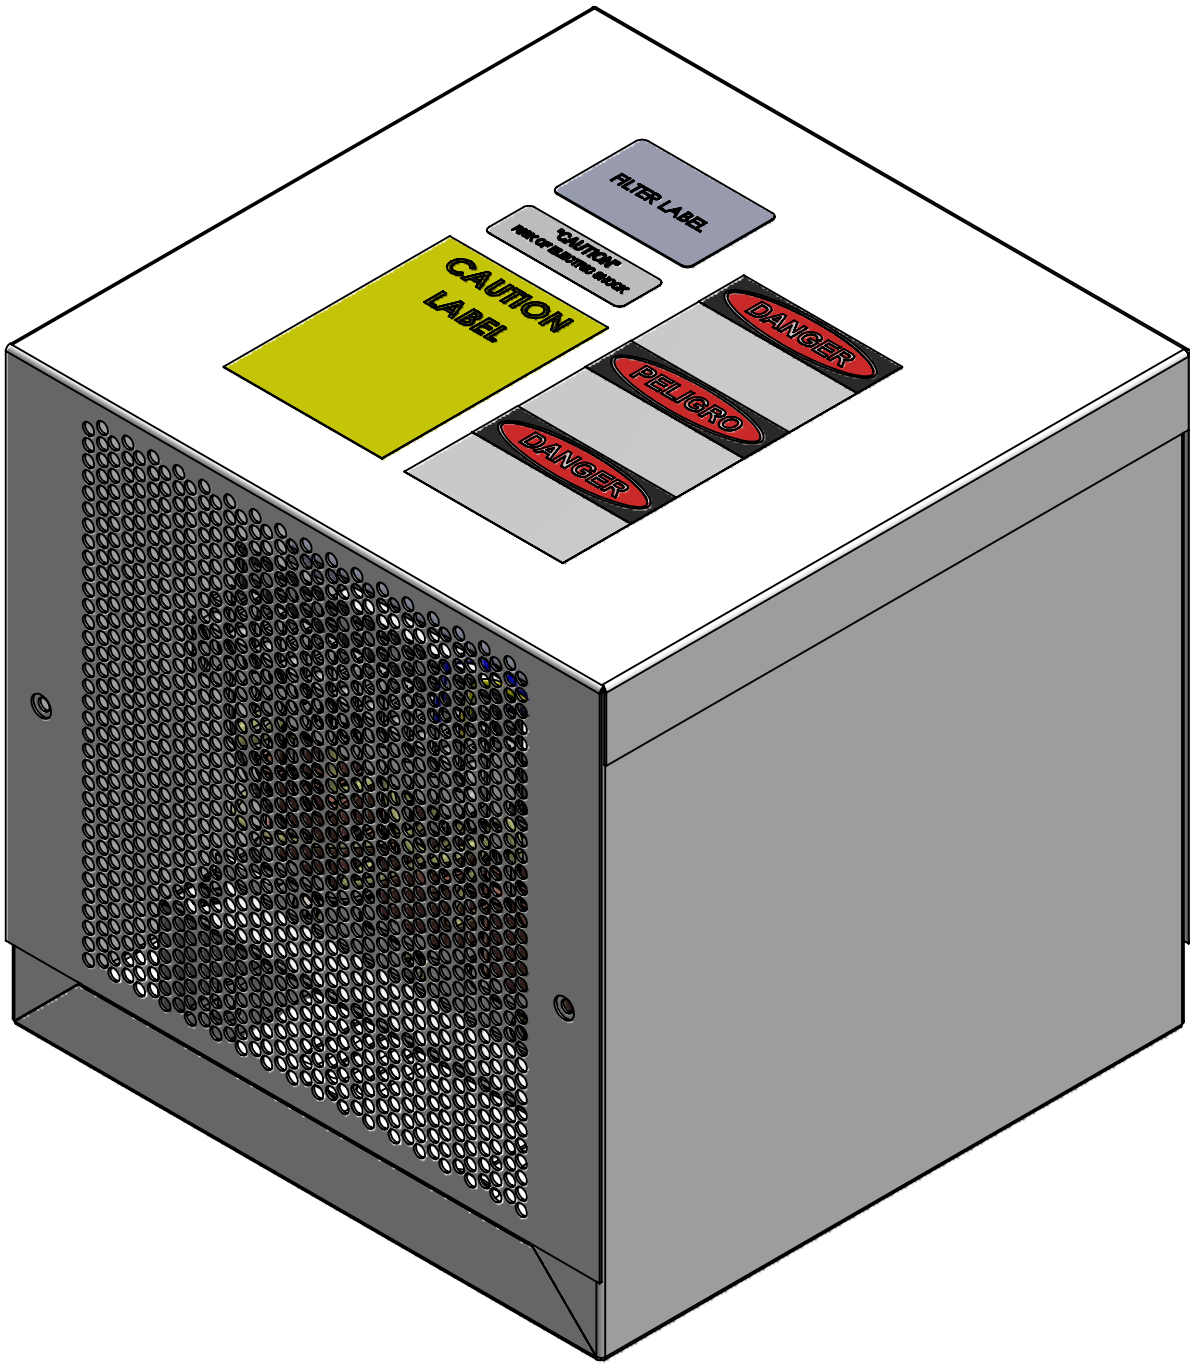


BOTTOM VIEW

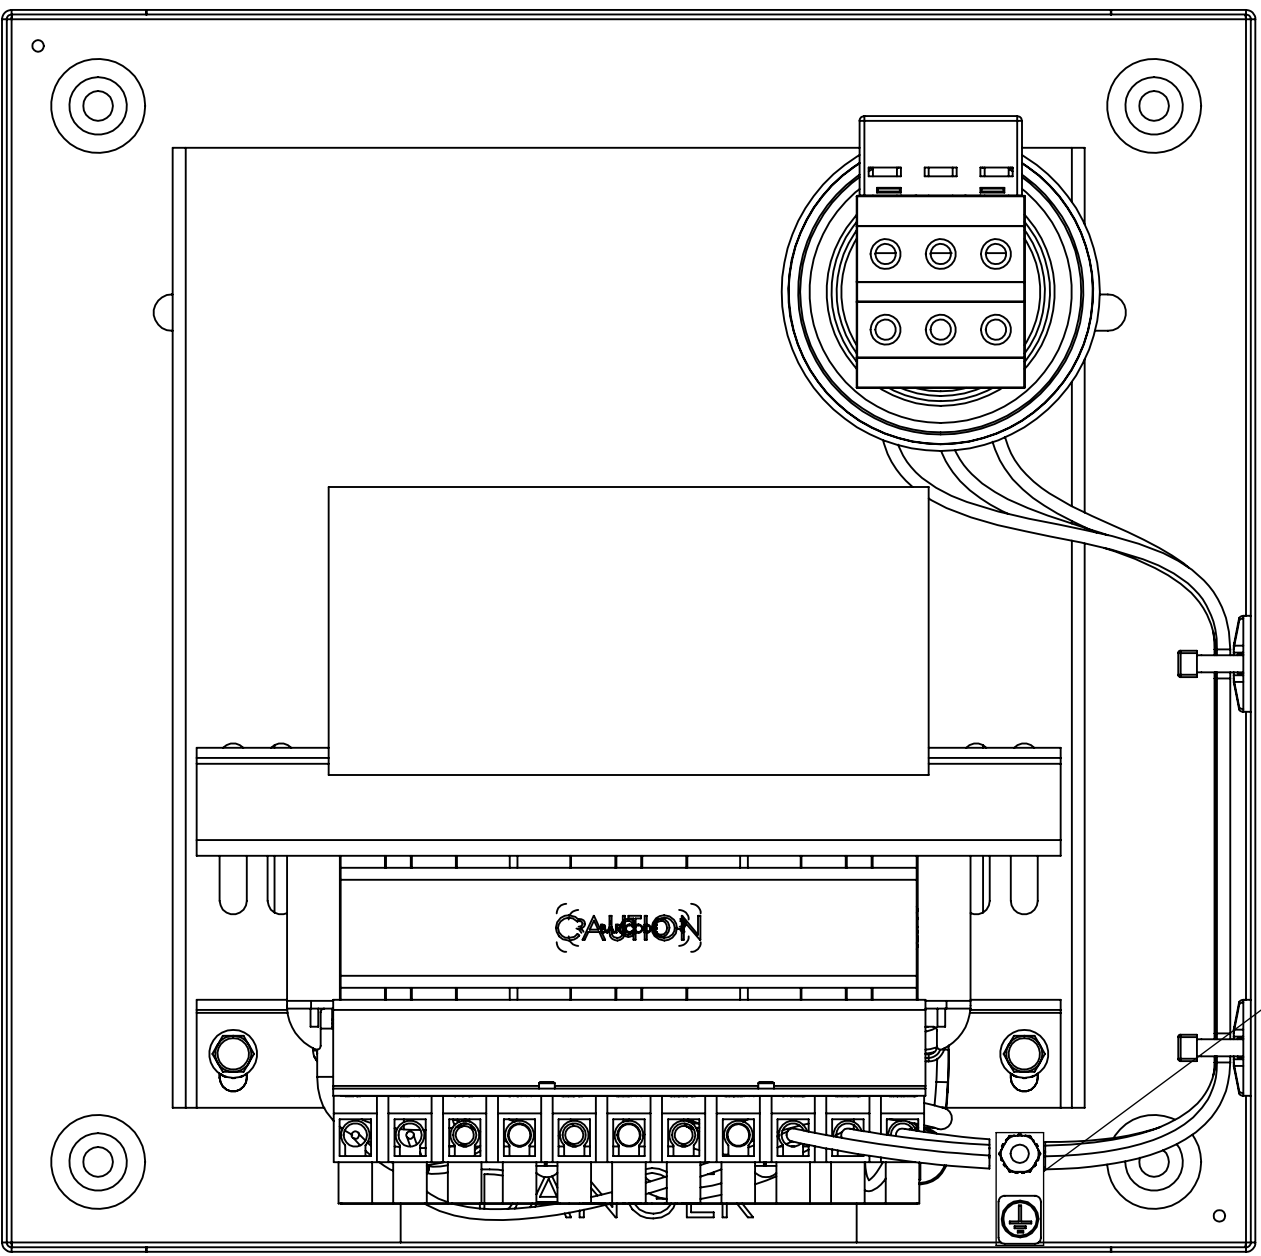

TOP VIEW
(PANELS REMOVED)

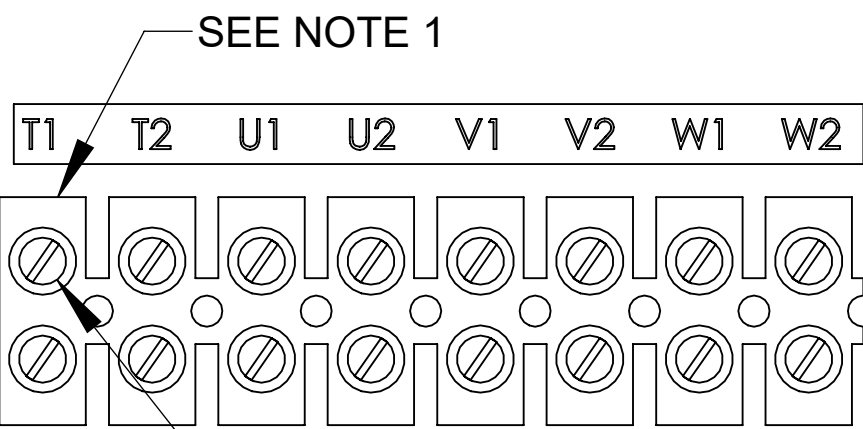

CUSTOMER CONNECTION
DETAIL VIEW

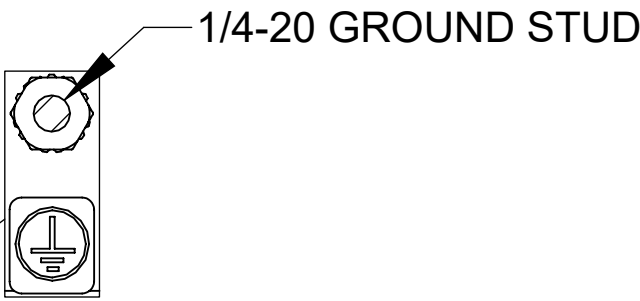

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200		SWG 30A 208-240V 2-8kHz FILTER, NEMA 1/2 ENCL.	
		DRAWN KV	DATE 08/01/19	SIZE D	DWG No. CD SWGG0030A
		CHECKED KV	DATE 08/01/19	REV 00	
		APPROVED PY	DATE 11/14/19	SCALE 1:2	SHEET 1 OF 1