WEIGHT (LBS)
17

ECO No	DESCRIPTION	REV BY	DATE
M9353	UPDATED LABEL GRAPHICS	JT	11/03/14

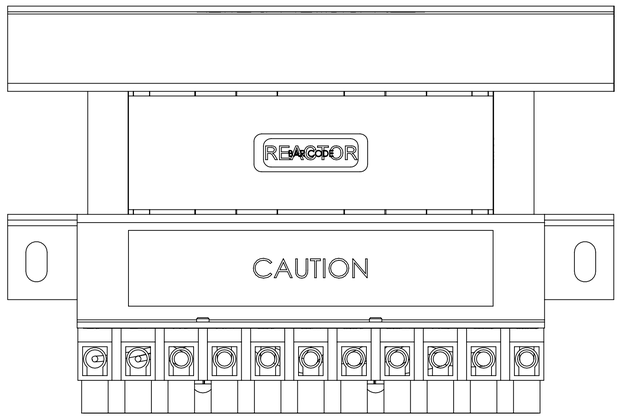

TOP VIEW

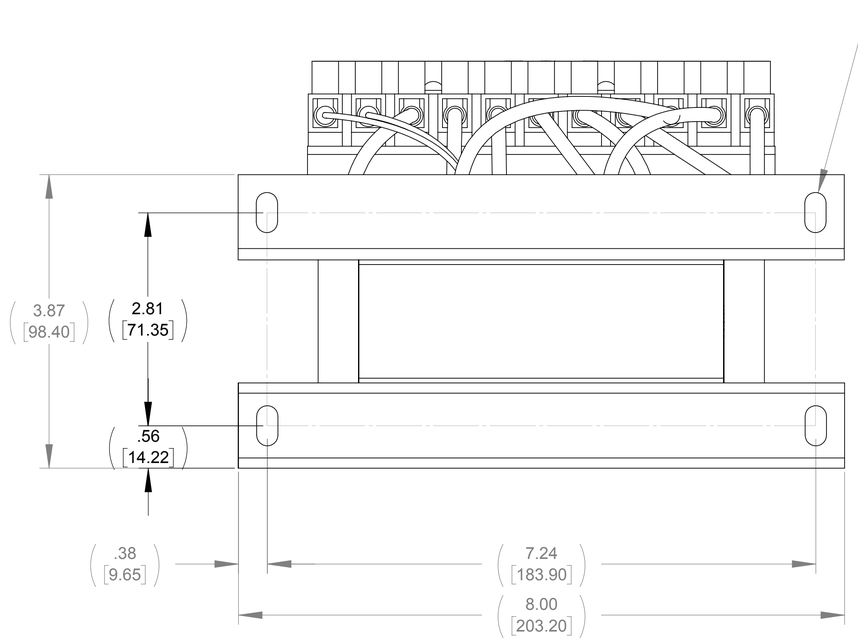

BOTTOM VIEW

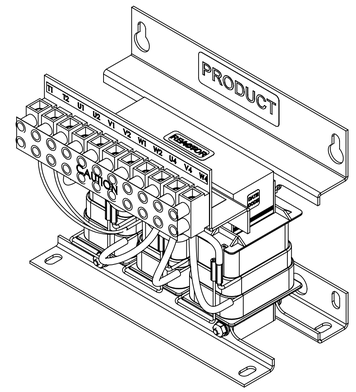



DETAIL B
(2 PLACES)

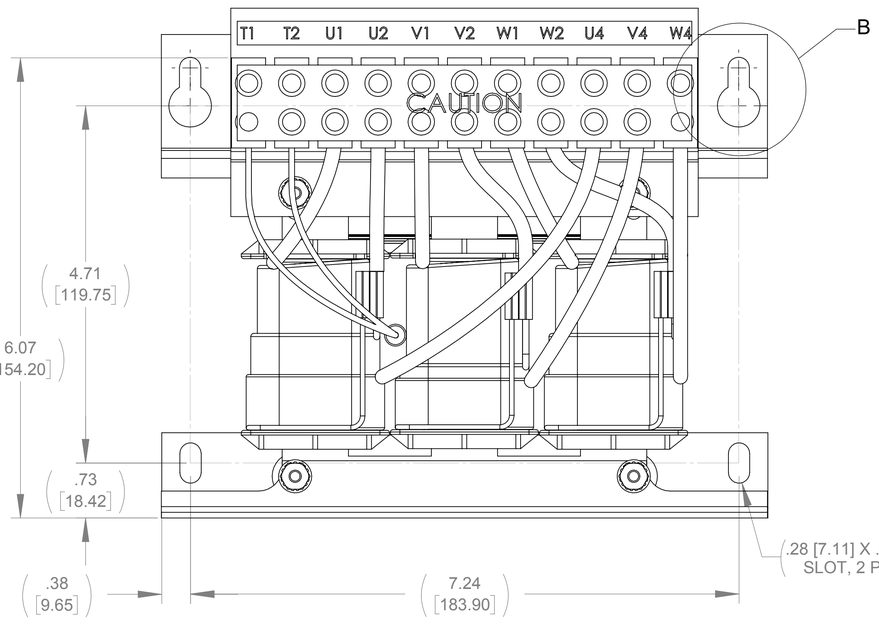

FRONT VIEW

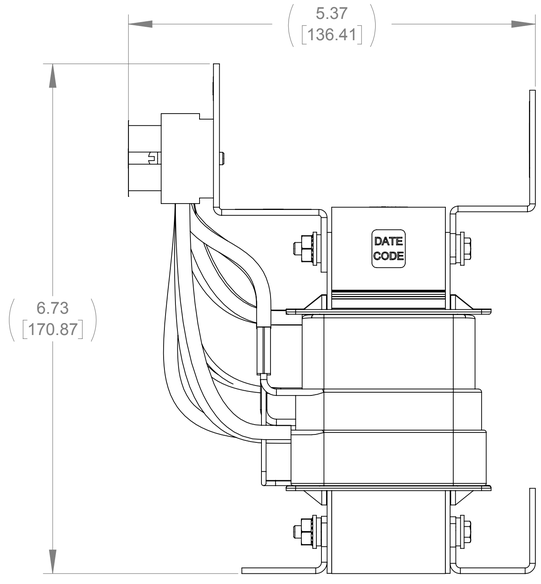

RIGHT SIDE VIEW

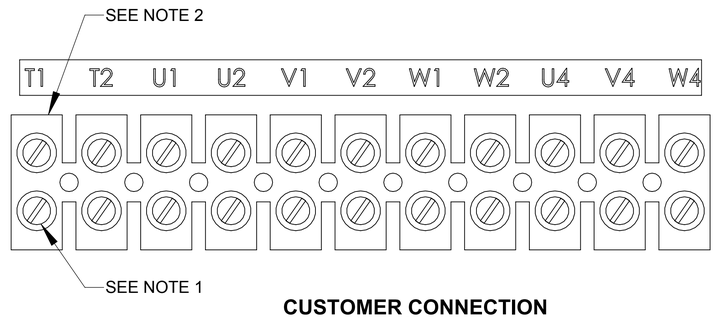

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:
1. **TIGHTEN TERMINAL BLOCK SCREWS TO 16 IN/LBS. TORQUE, MAX.**
2. **TERMINAL WIRE SIZE: 4-14 AWG.**
3. **FILTER REQUIRES: CAP-506SW (QTY. 1).**

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
AN EL POWER ELECTRONICS COMPANY

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN MN	DATE 09/18/13
CHECKED JM	DATE 11/04/14
APPROVED JM	DATE 11/04/14

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

SWG 12A 380-480V 2-8kHz

SIZE	DWG No.	REV
D	CD SWGM0012D	02

SCALE 1:1 SHEET 1 OF 1