


APPROX. WEIGHT  
(LBS)  
310

D


C

B


A

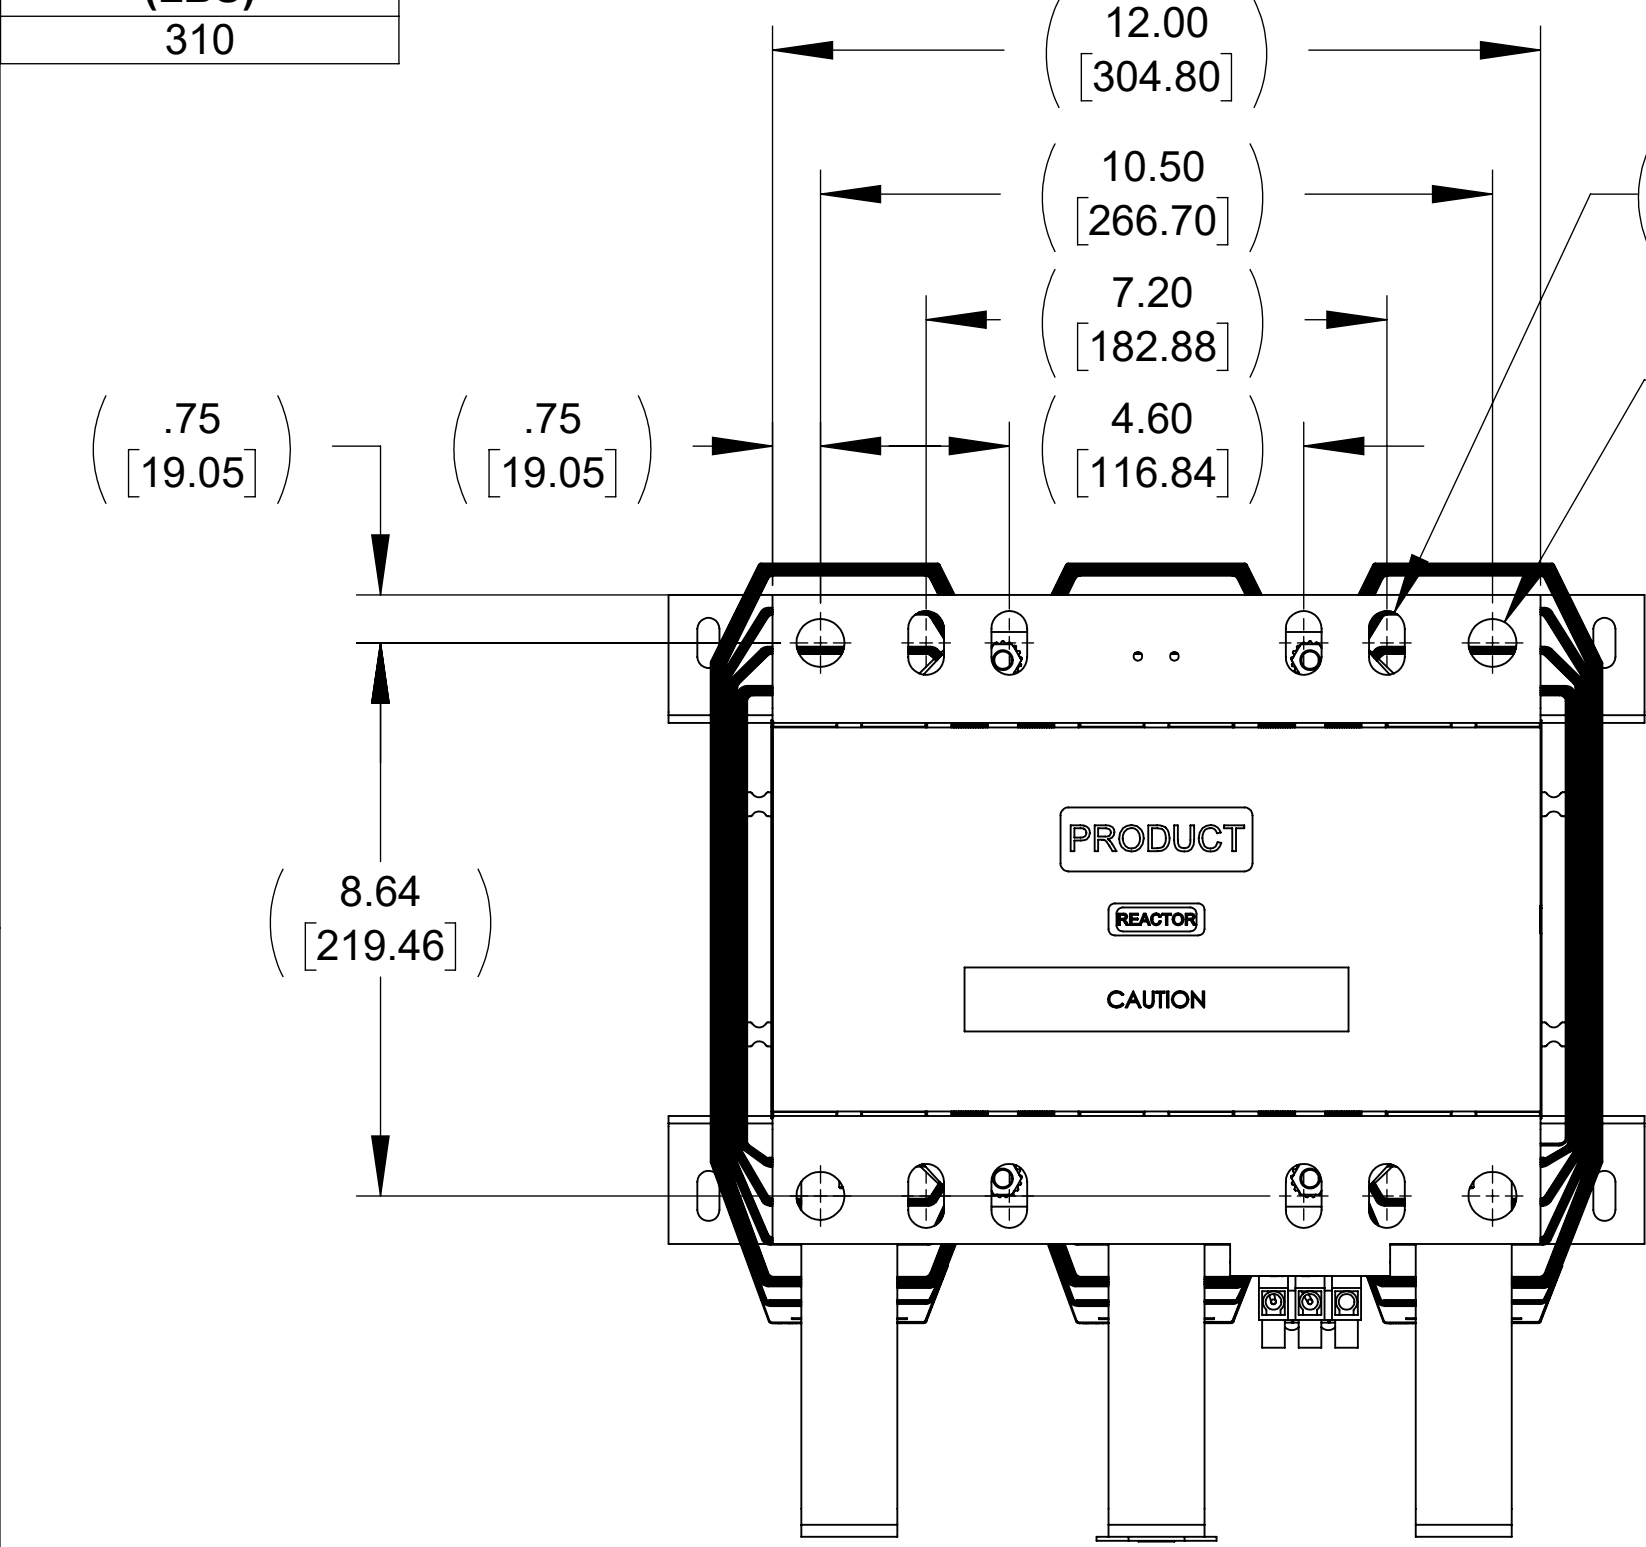


TOP VIEW

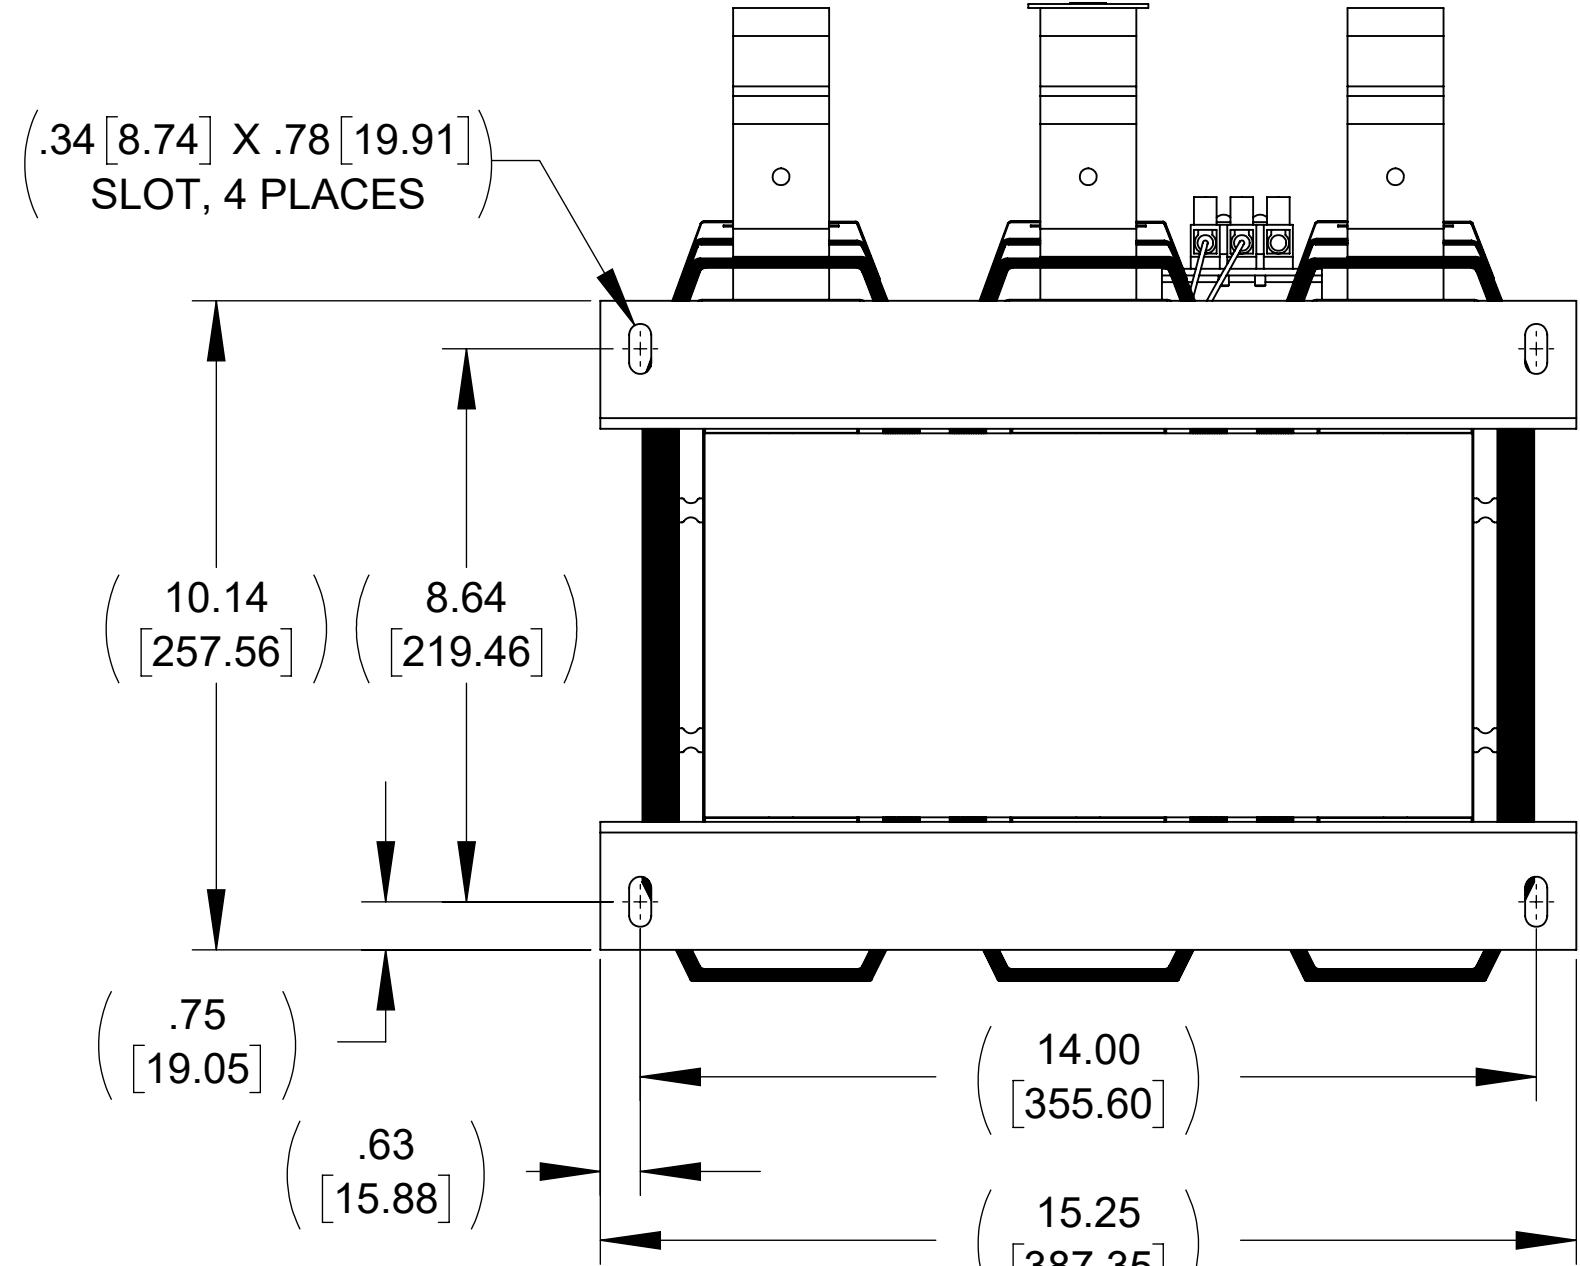


BOTTOM VIEW




CUSTOMER CONNECTION  
DETAIL VIEW( THERMAL)

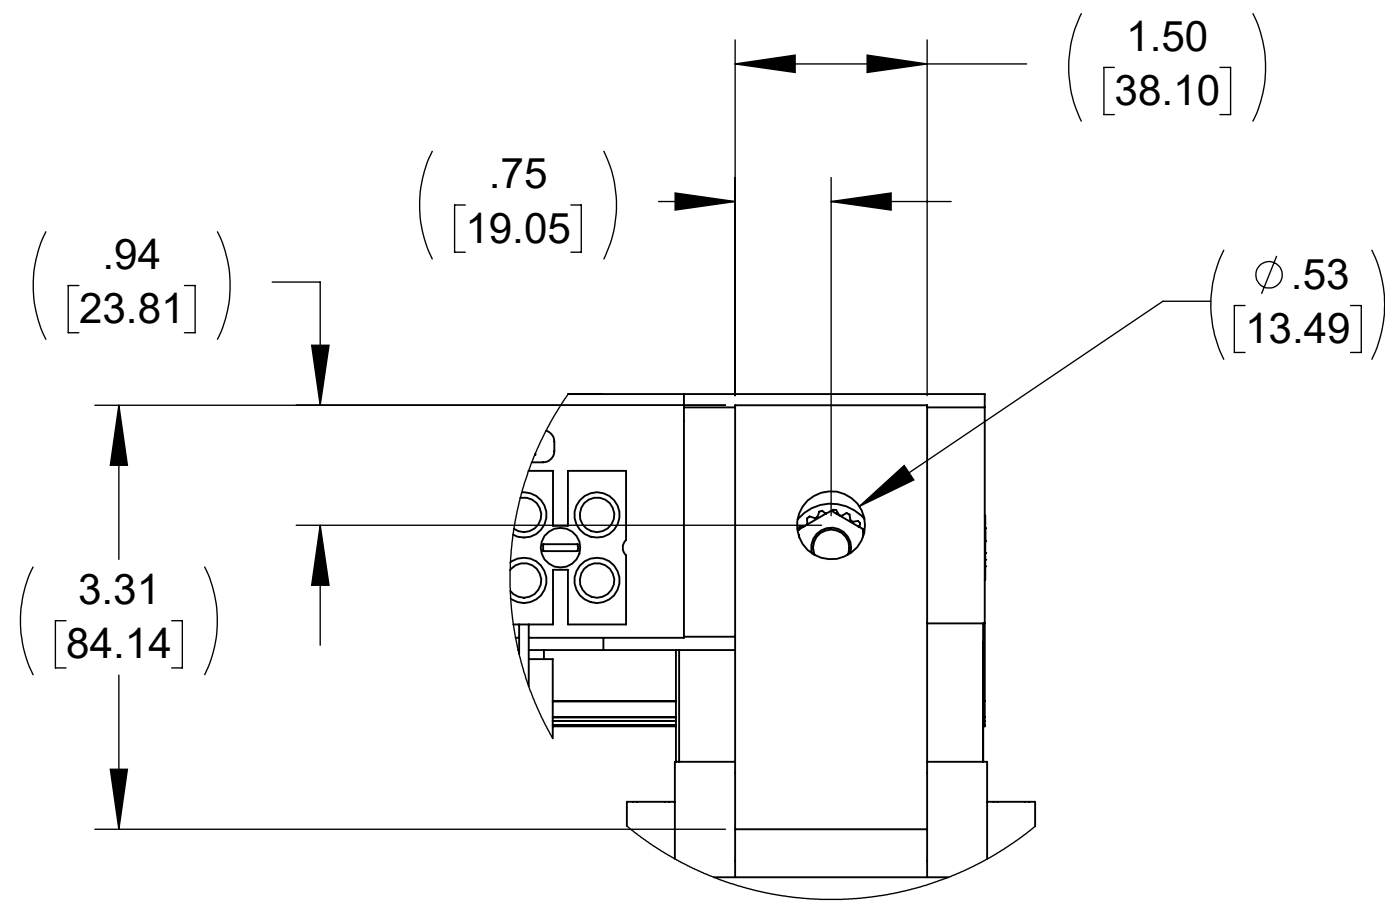


DETAIL B  
(3 PLACES)

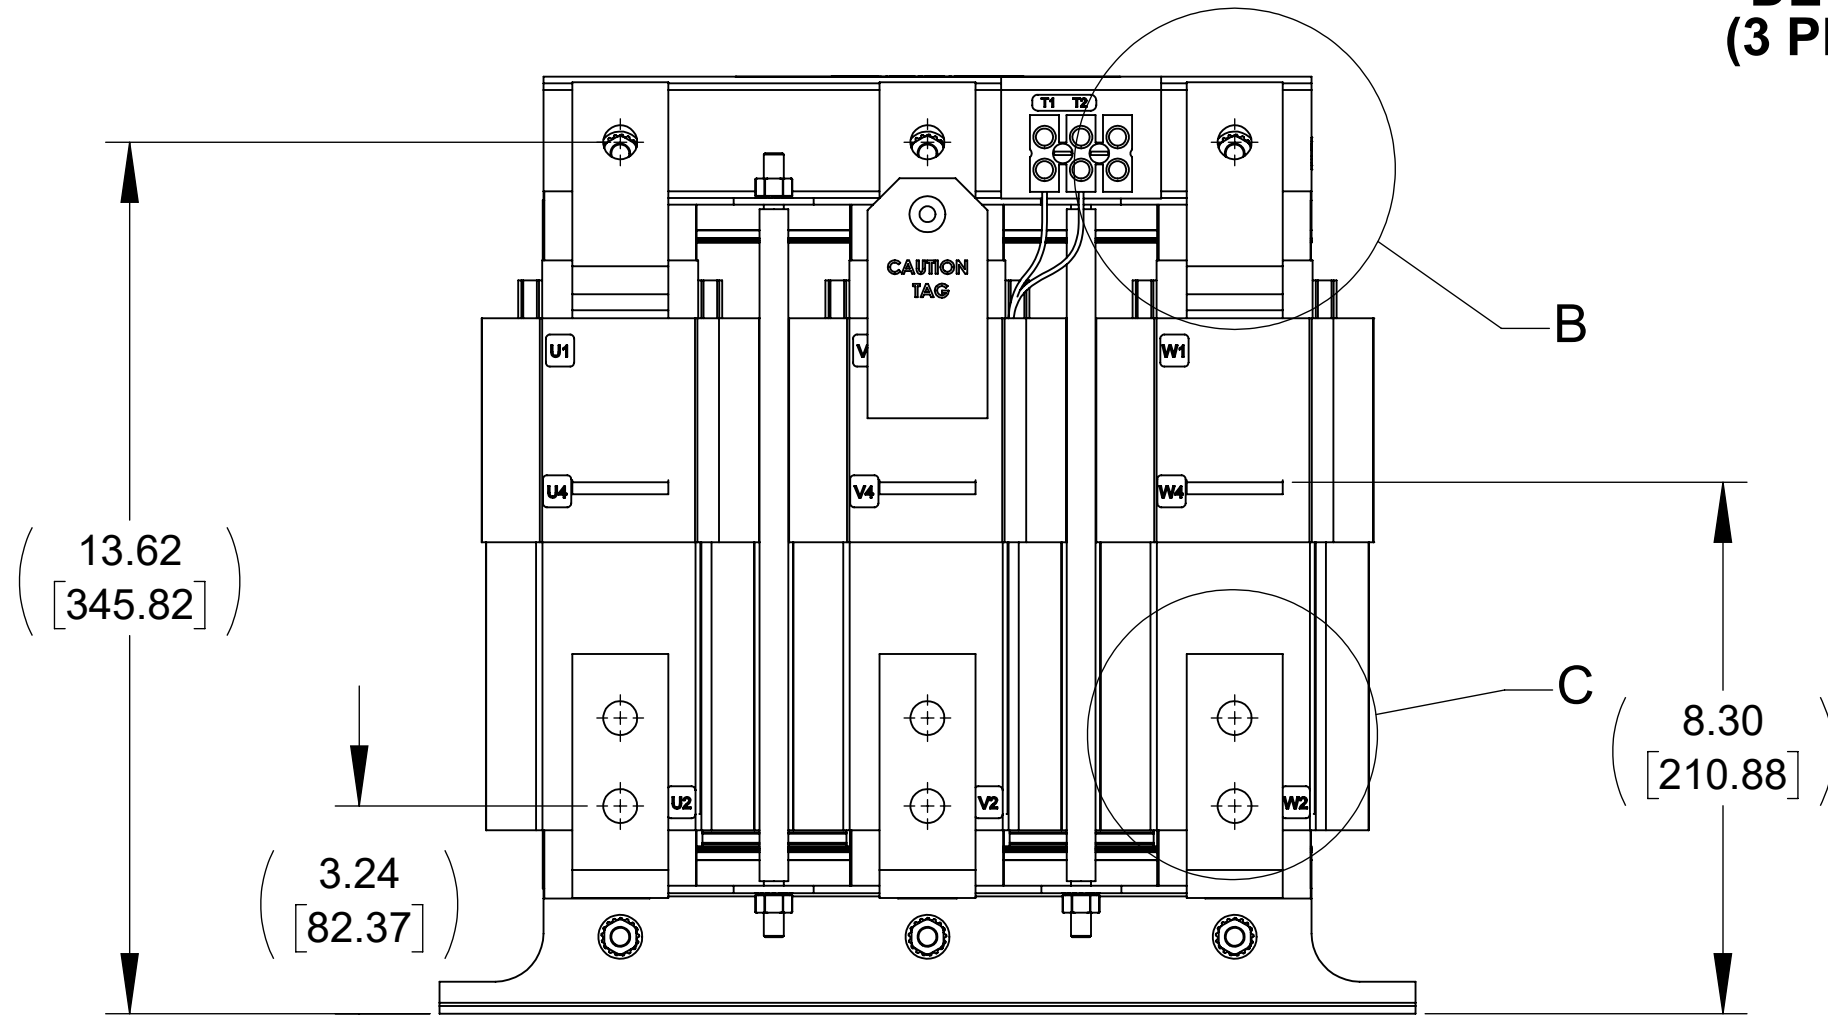


FRONT VIEW

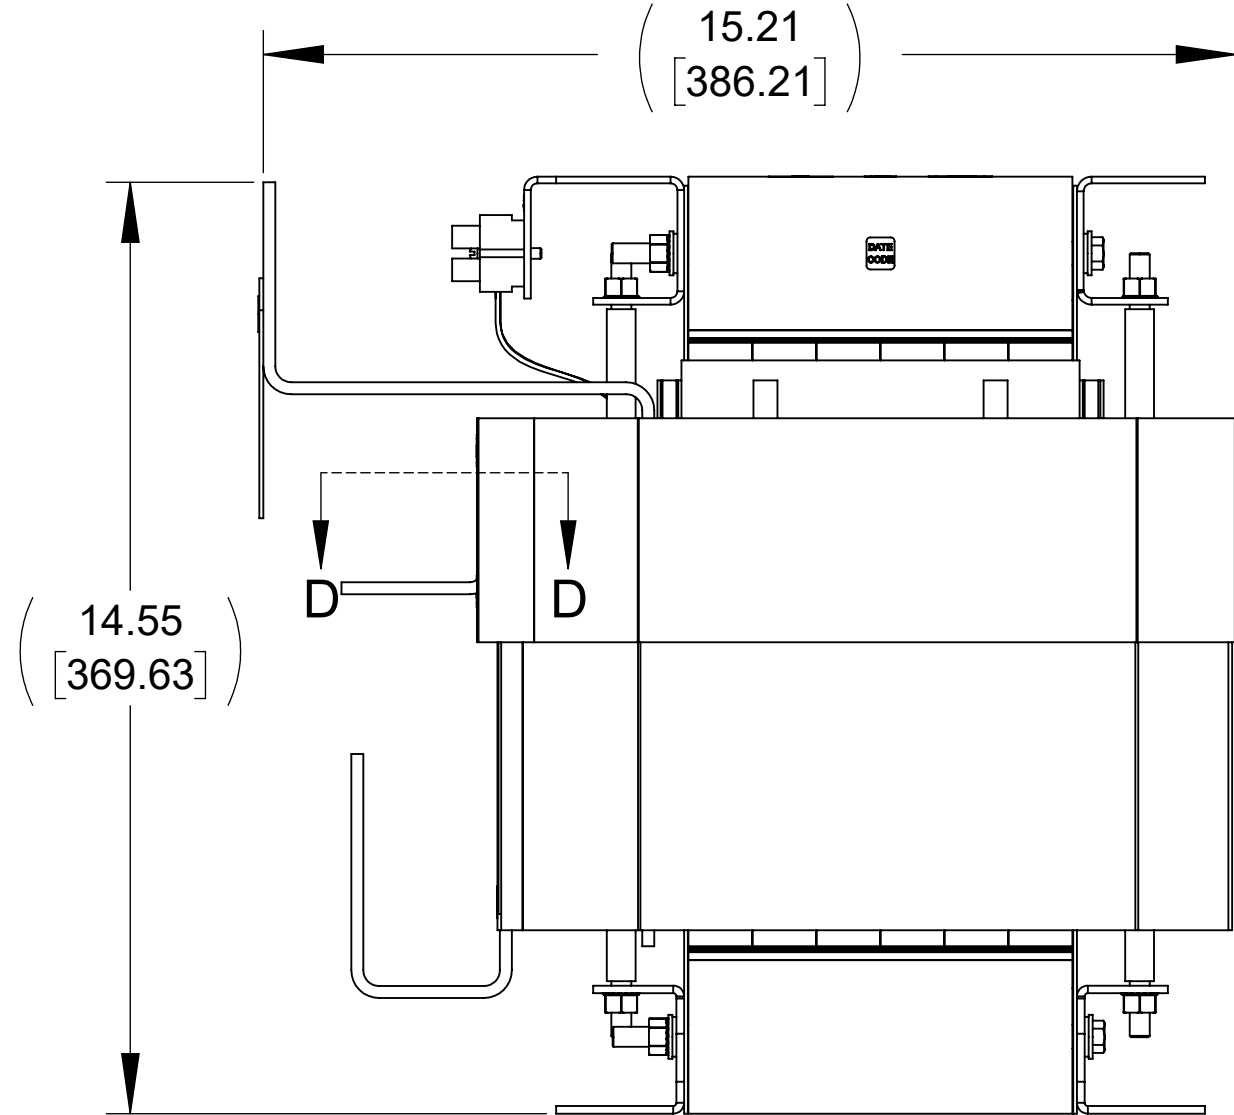


SIDE VIEW

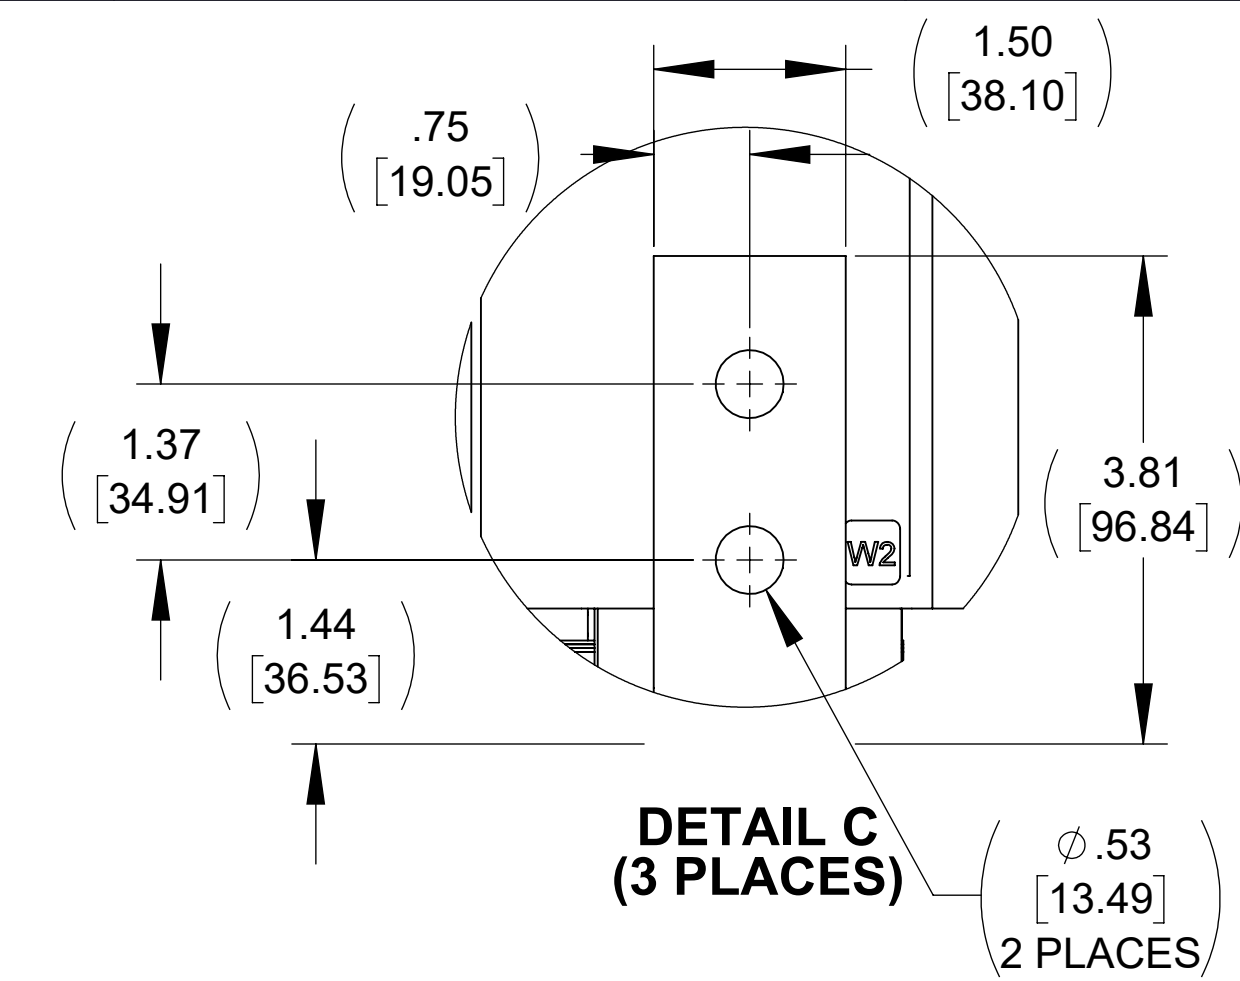

DETAIL C  
(3 PLACES)

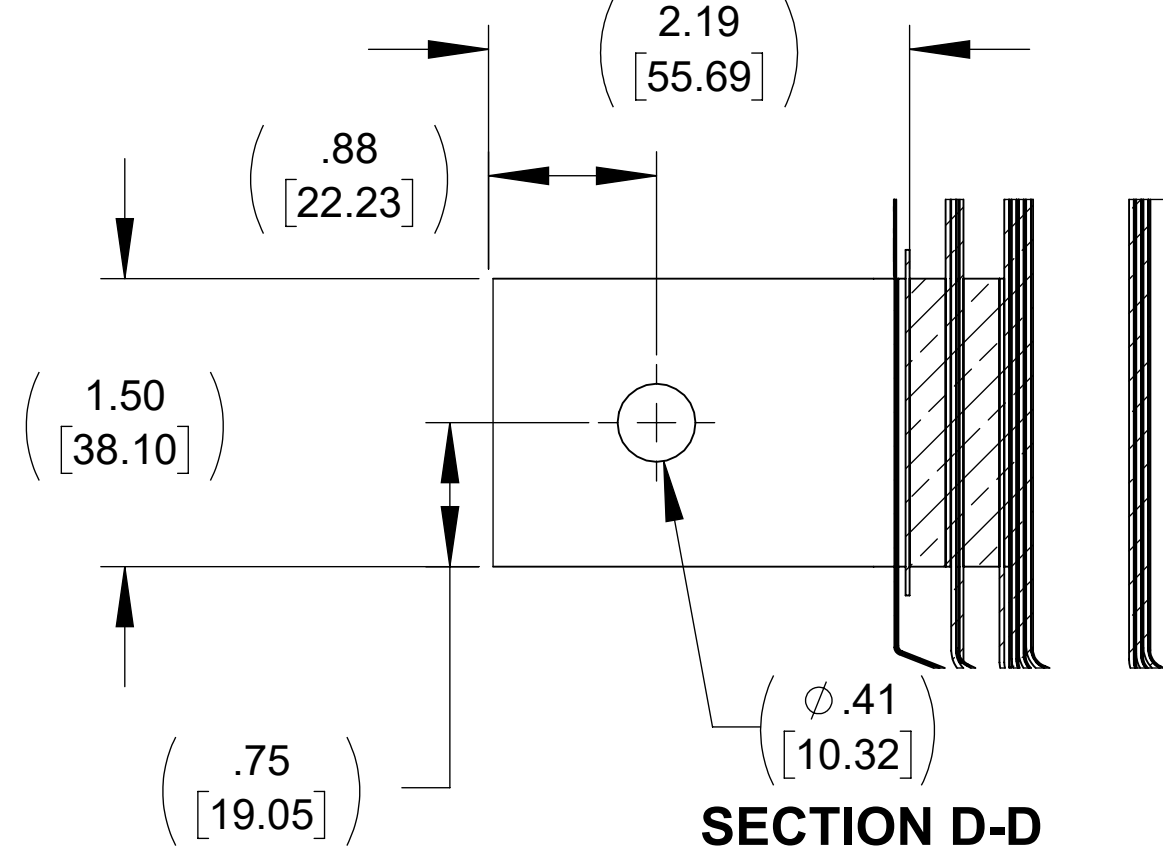


SECTION D-D  
(3 PLACES)

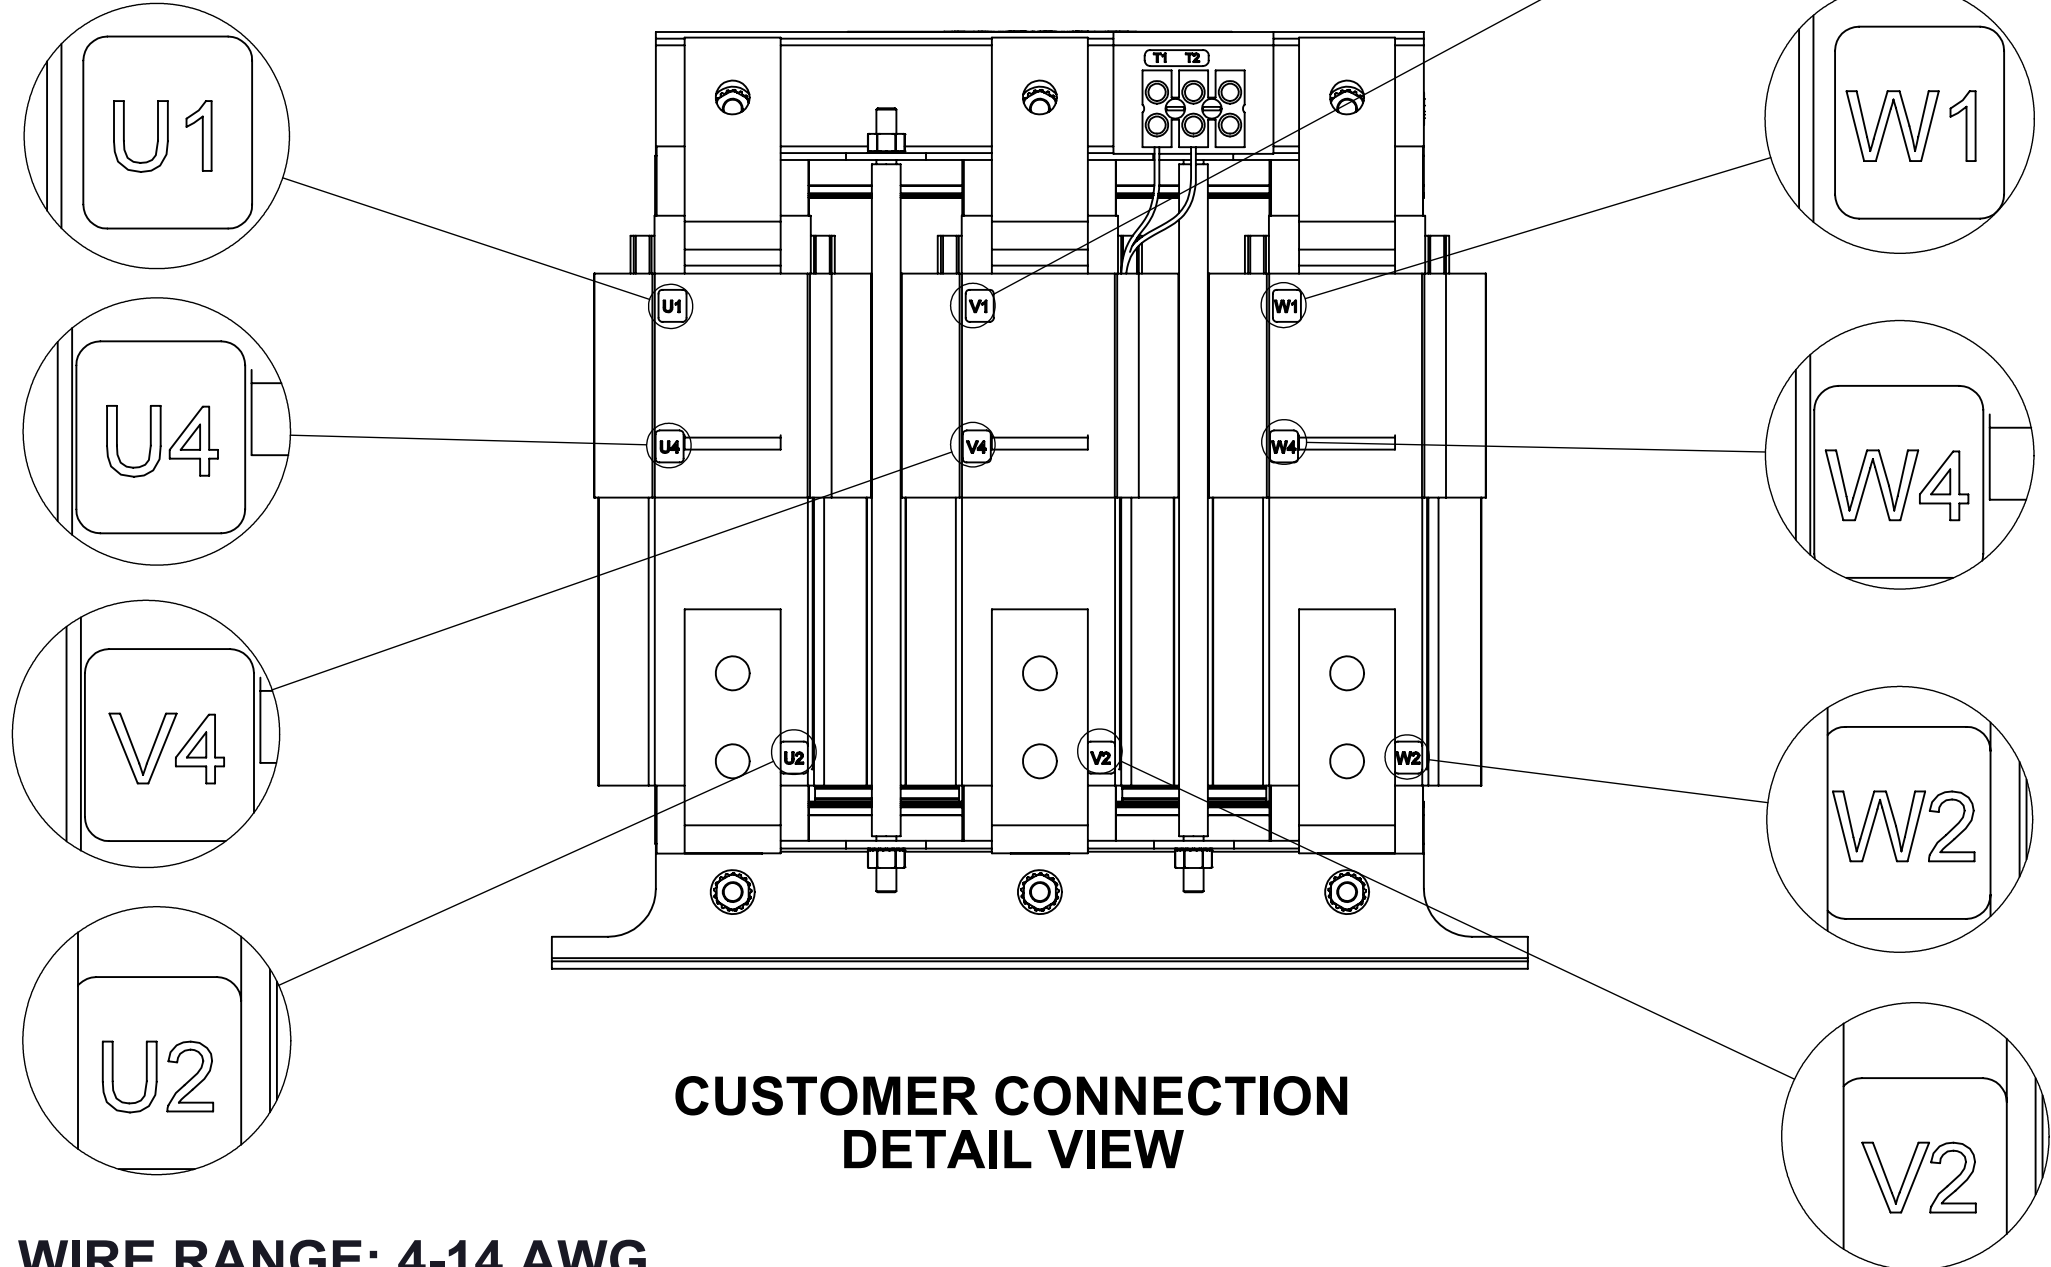

CUSTOMER CONNECTION  
DETAIL VIEW

ECO No	DESCRIPTION	REV BY	DATE
M12837	UPDATE DRAWING DUE TO CHANGES TO LUG 3940-105	WF	06/16/20

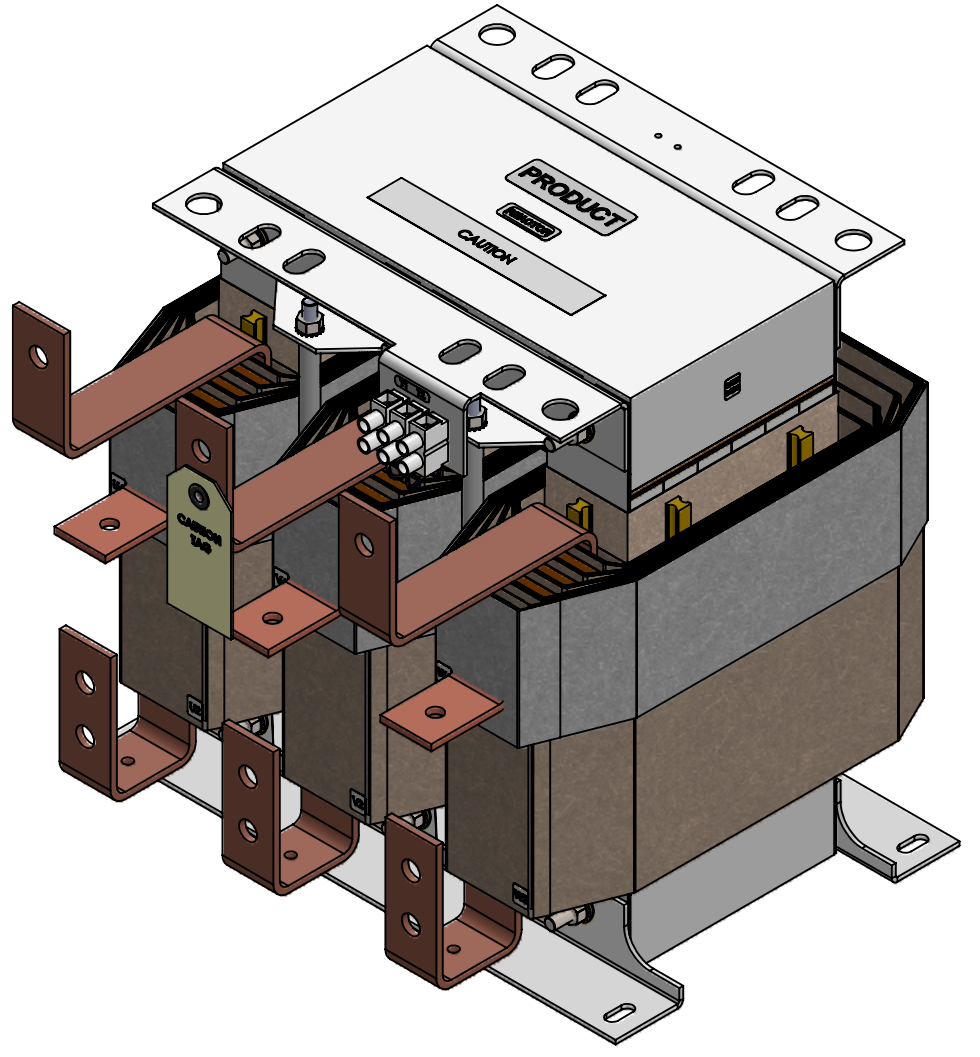

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 INLBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.
4. FILTER INCLUDES: CAPPANEL-608C (QTY. 1).

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: $\pm 1^\circ$ 1 PLACE .X: $\pm .1$ [2.5] 2 PLACE .XX: $\pm .03$ [0.76] 3 PLACE .XXX: $\pm .010$ [0.254]		<b>MTE</b> POWER QUALITY. SOLVED. A STEEL PARTNERS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200		SWG 365A 380-480V 2-8kHz	
DRAWN JT		DATE 09/03/13		SIZE D	
CHECKED WF		DATE 06/16/20		DWG No. CD SWGM0365D	
APPROVED AK		DATE 06/22/20		REV 07	
SCALE 1:3				SHEET 1 OF 1	