





APPROX. WEIGHT
(LBS)
69

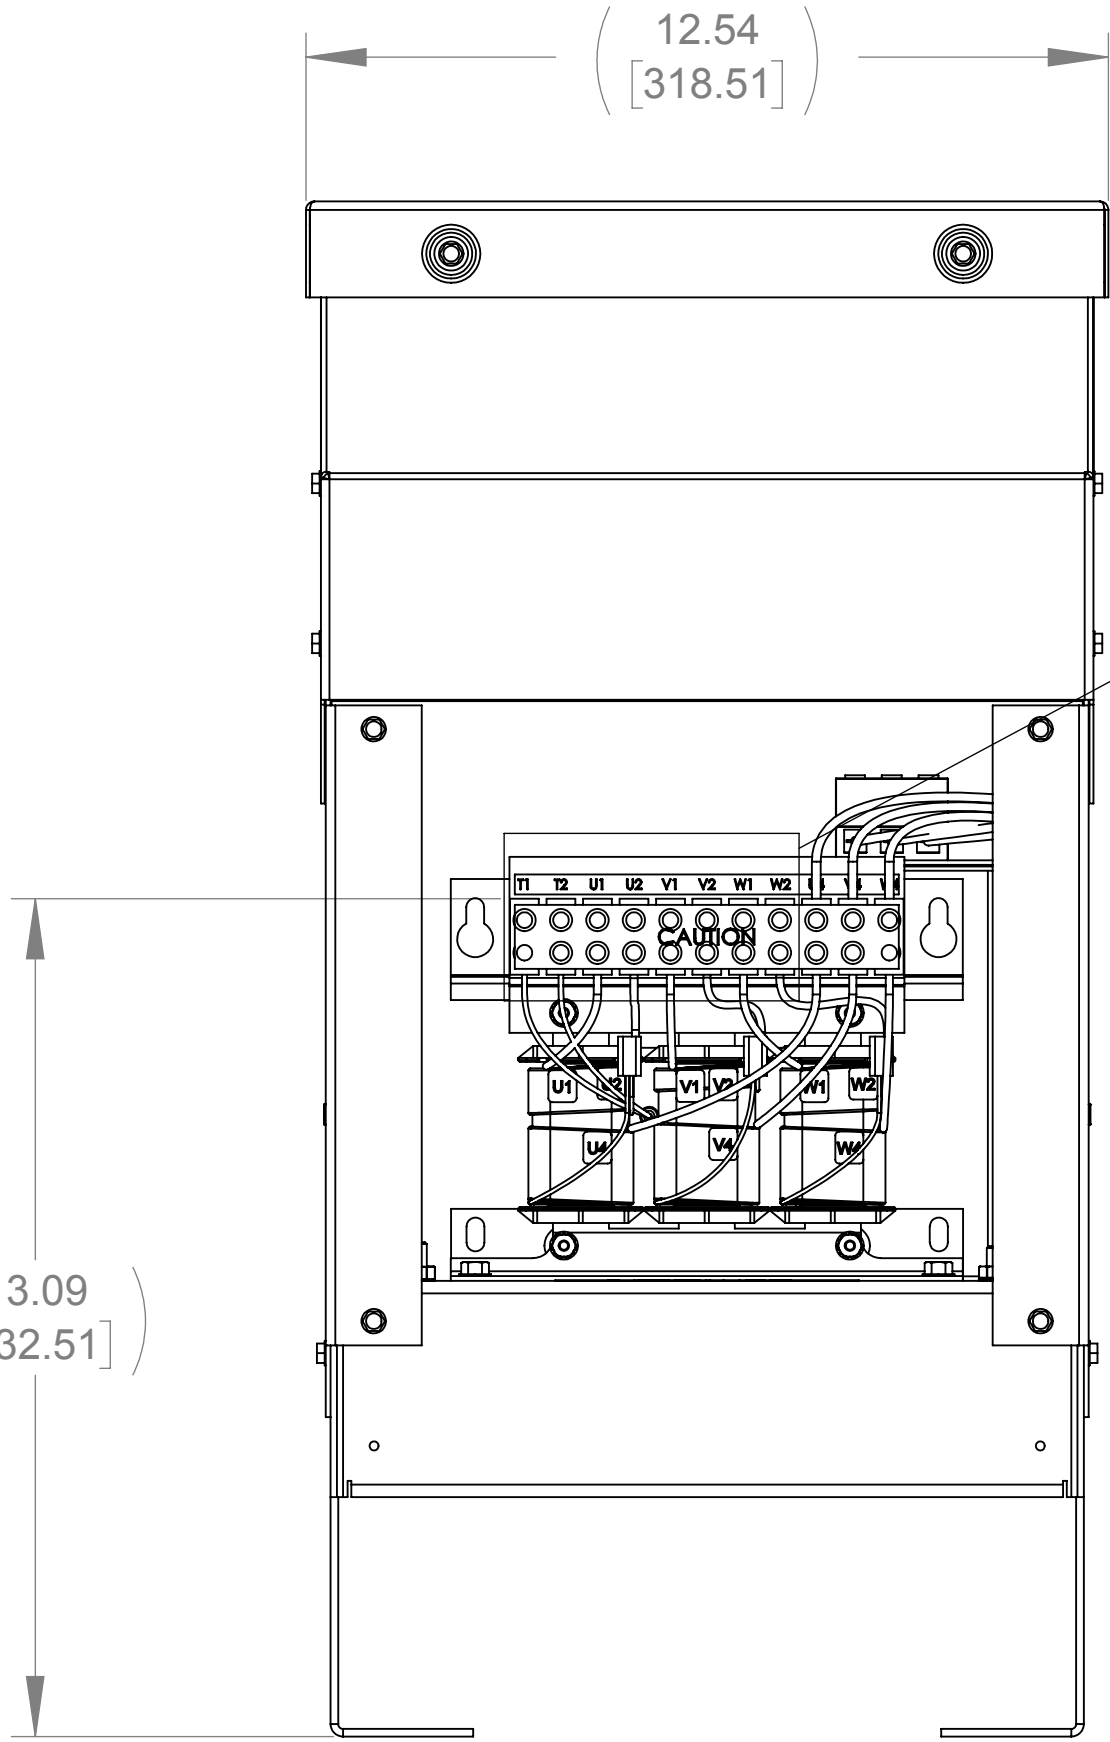

FRONT VIEW
(PANELS REMOVED)

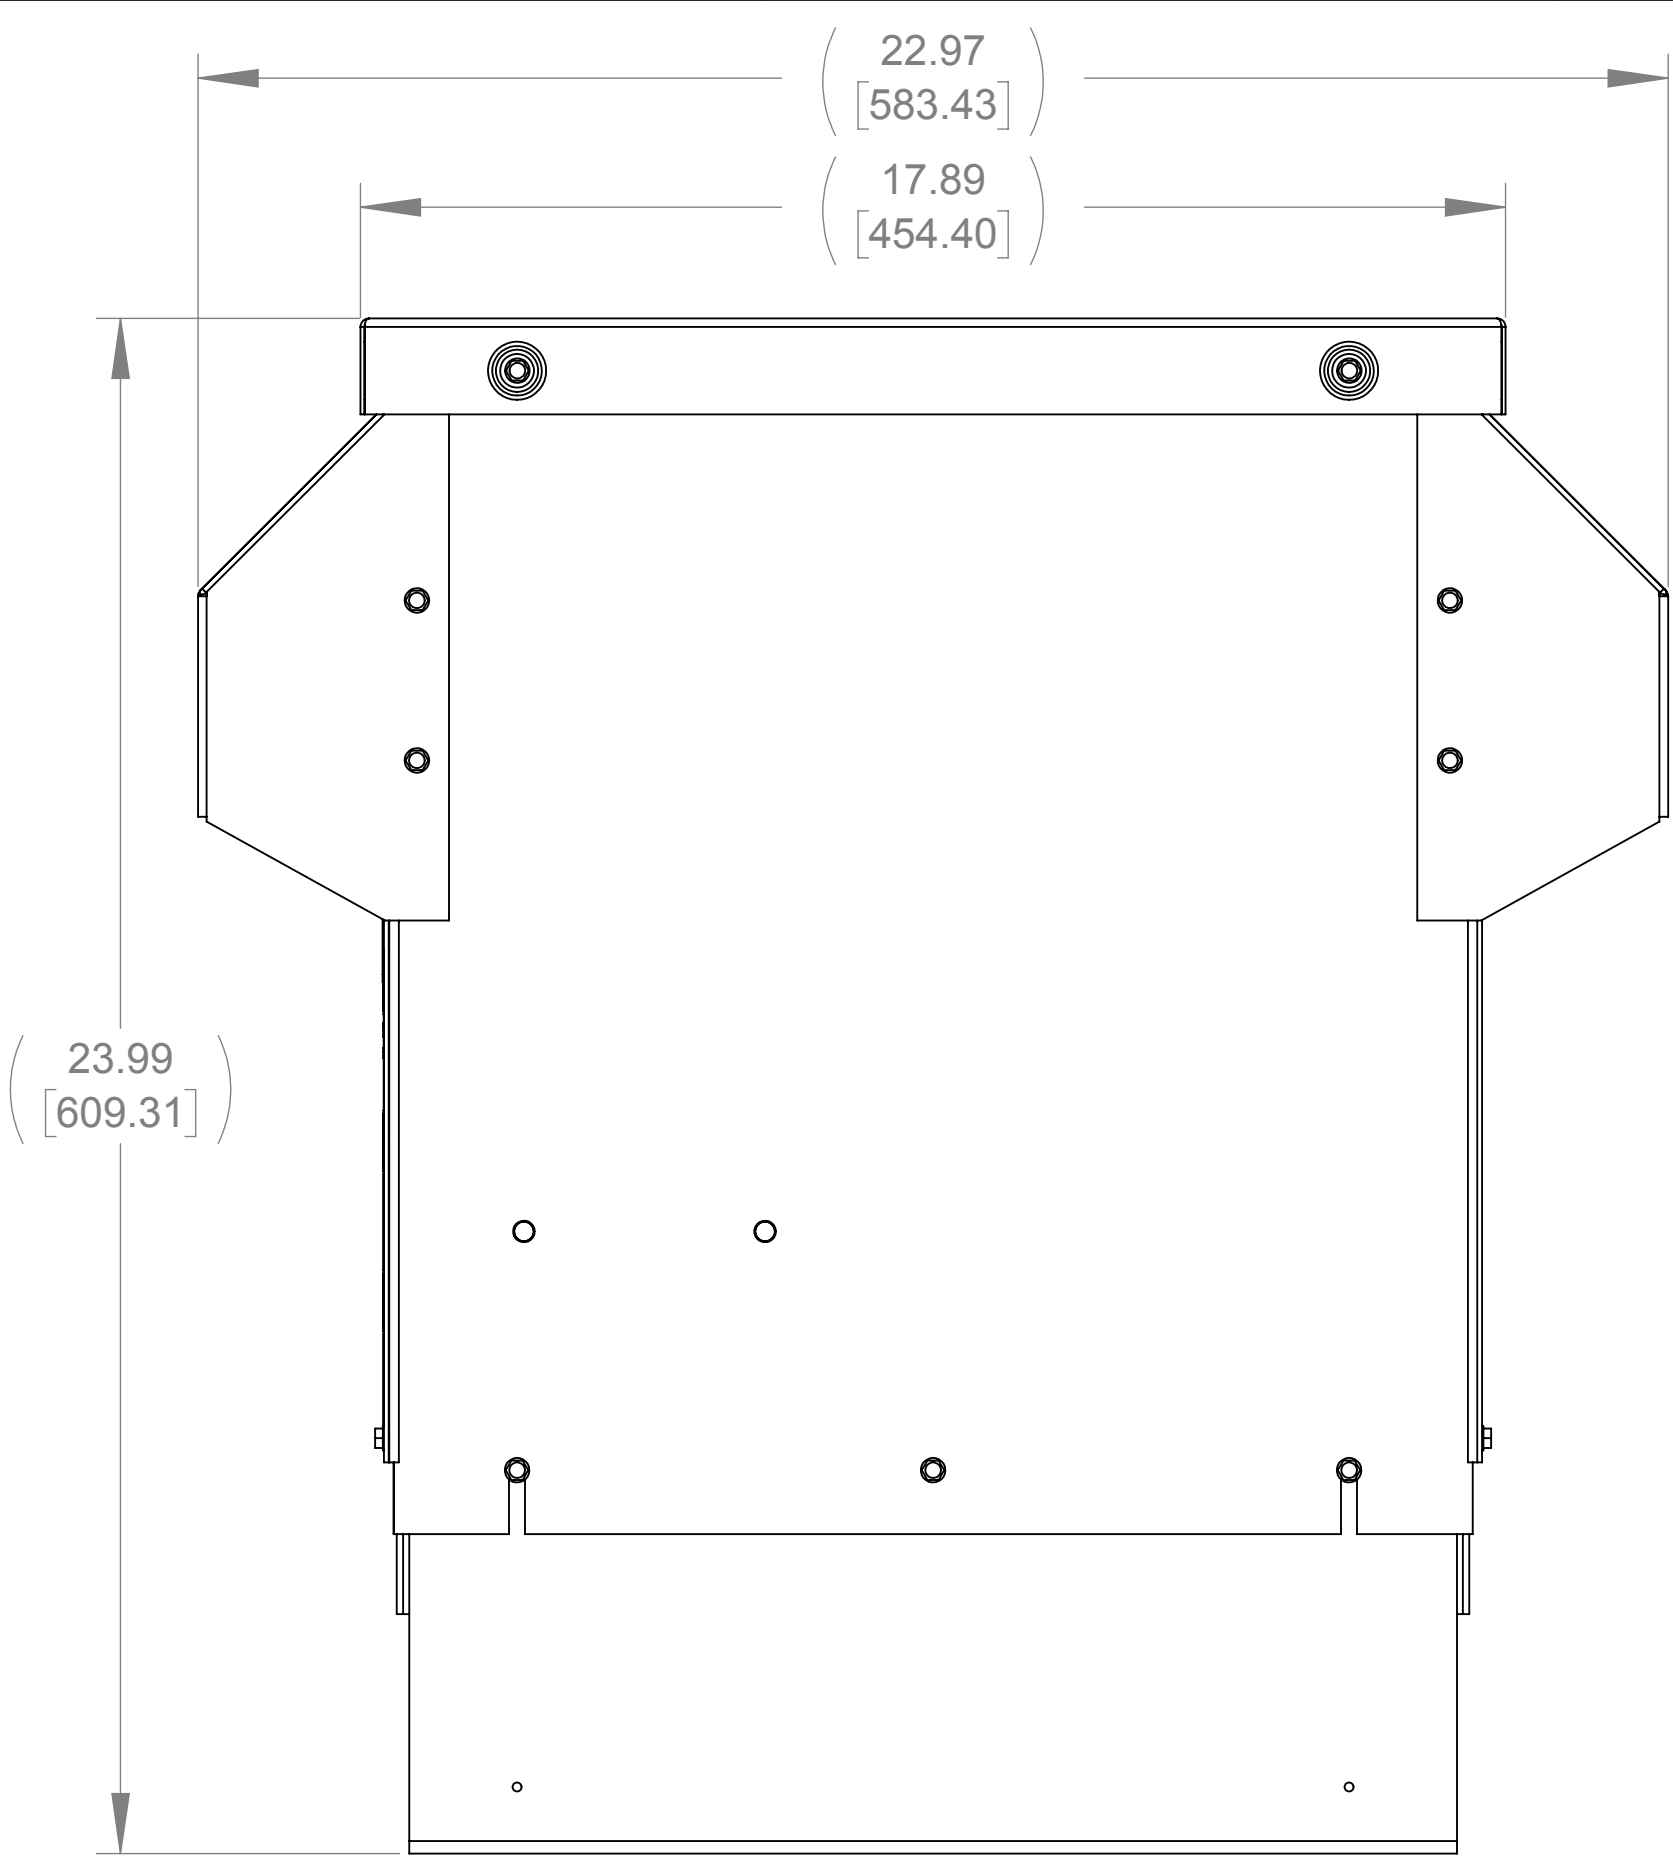


SIDE VIEW

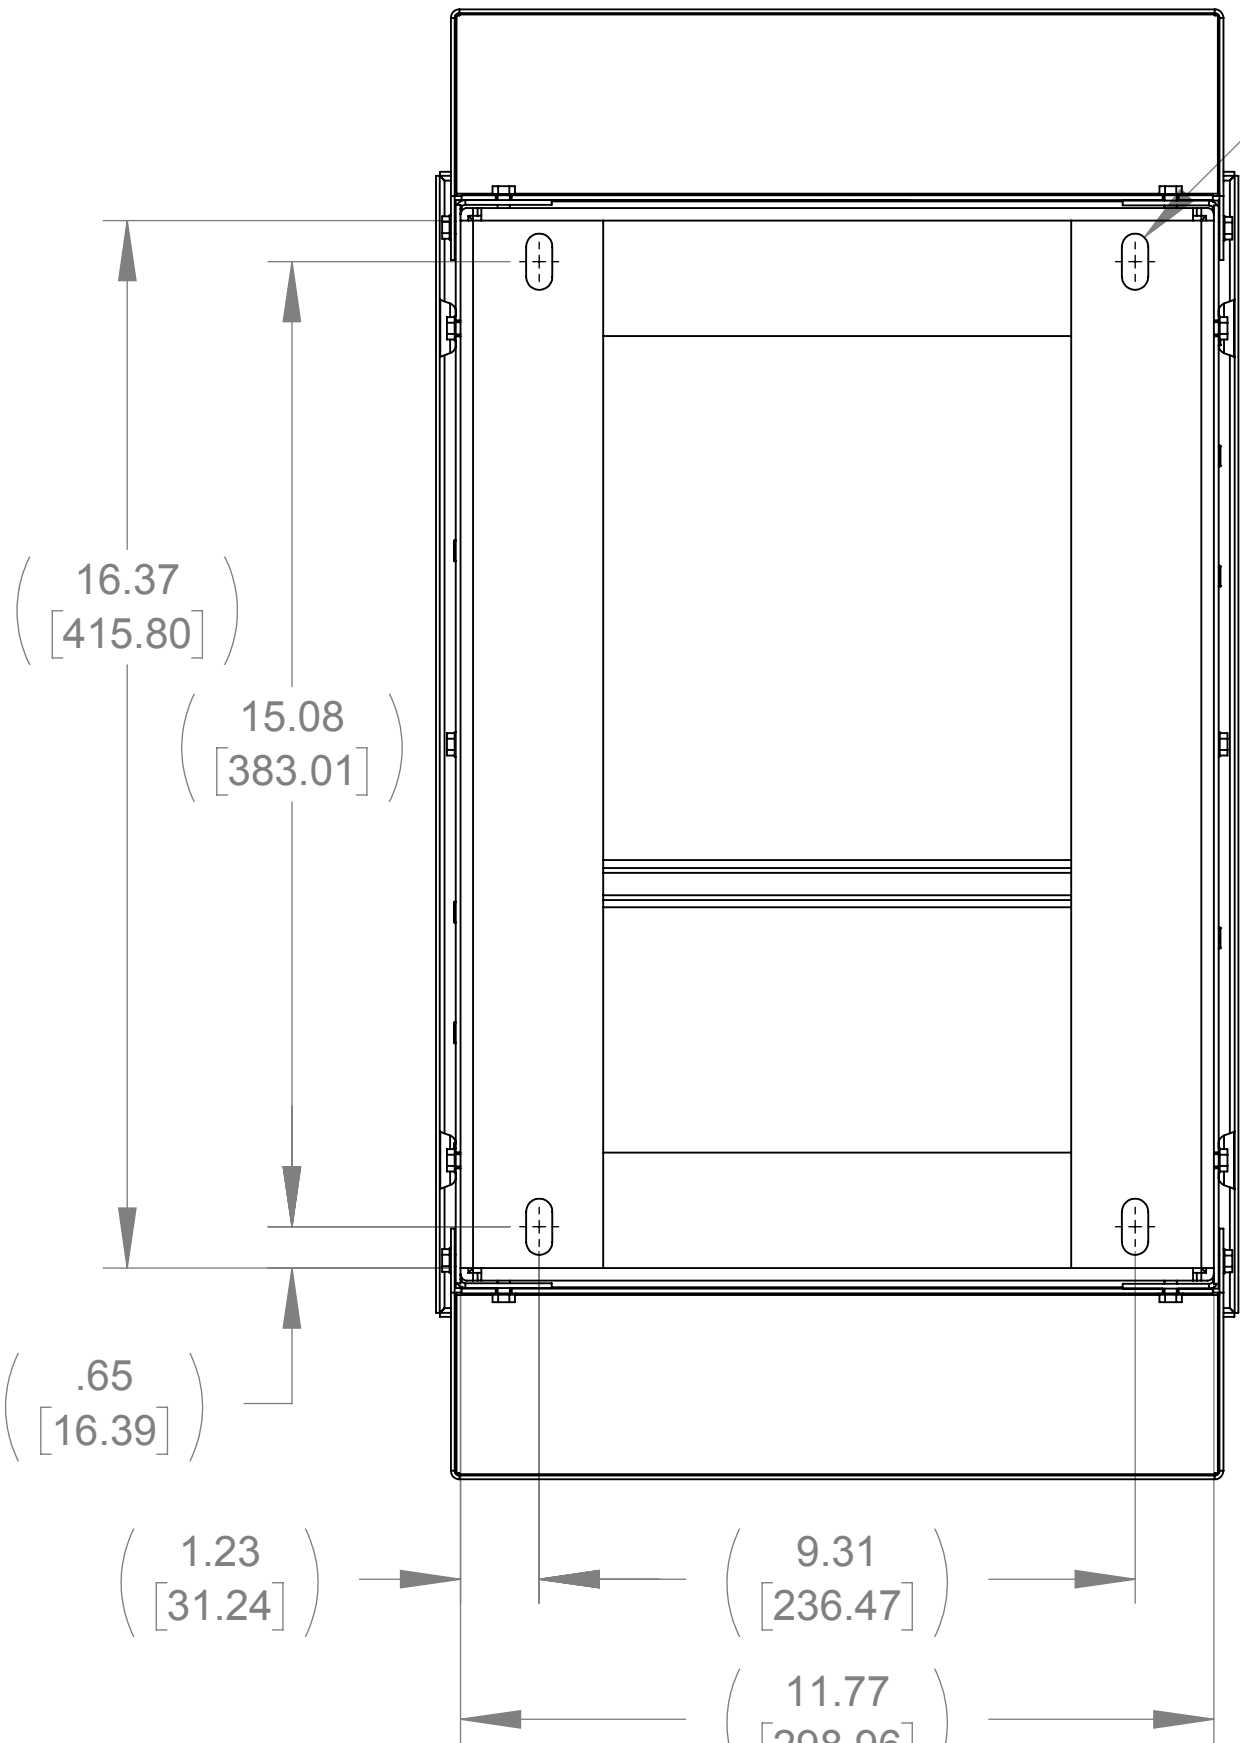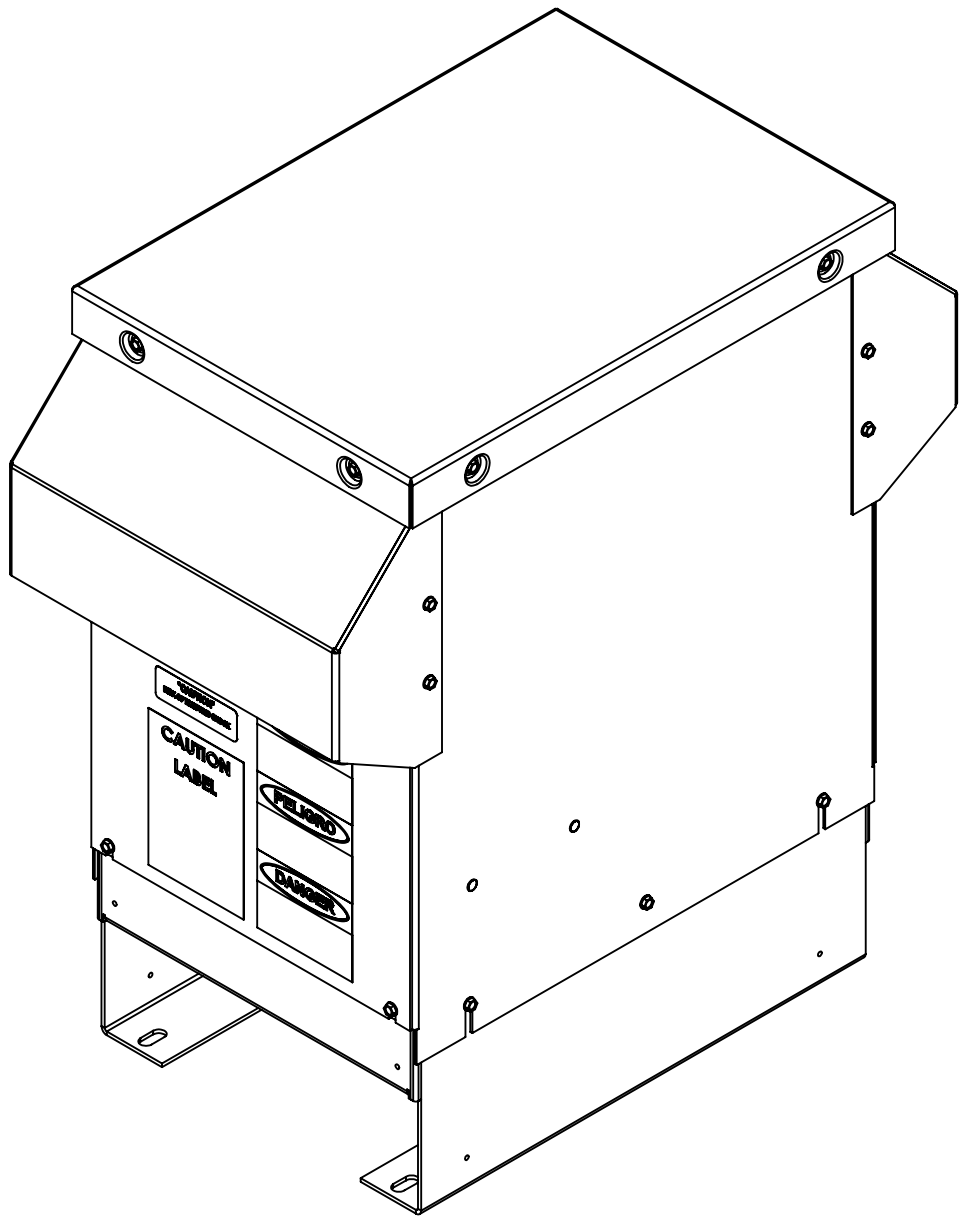


BOTTOM VIEW

(.41 [10.41] X .88 [22.35])
SLOT, 4 PLACES

1/4-20 GROUND STUD

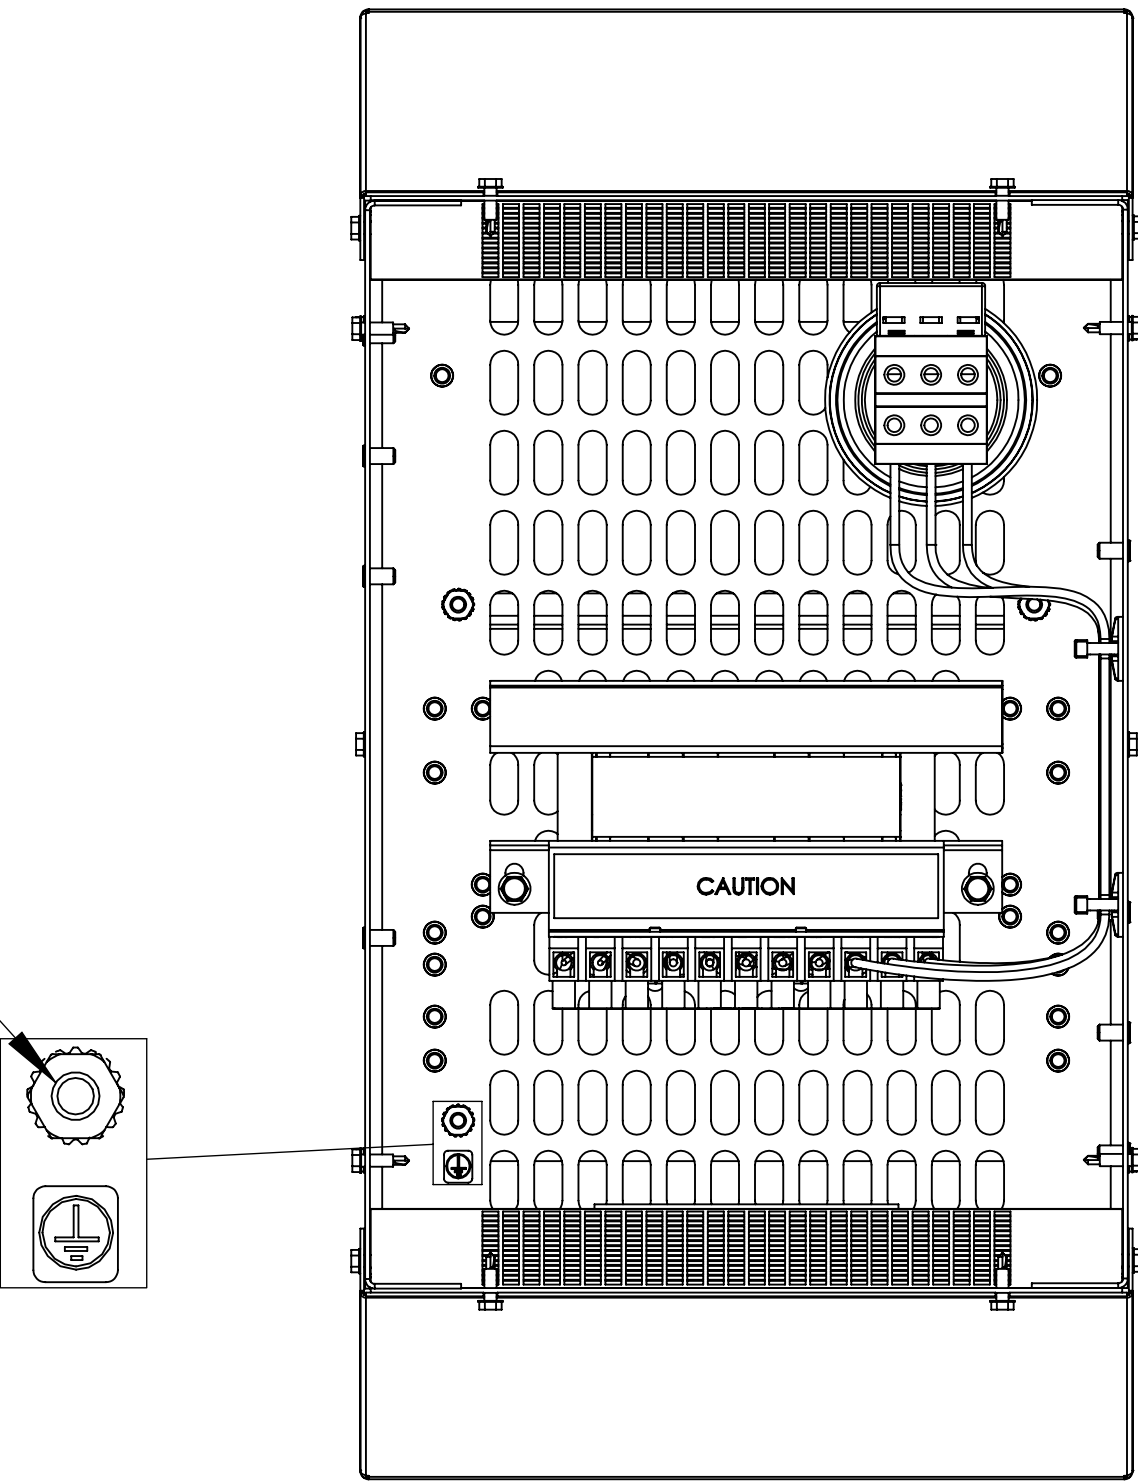

TOP VIEW
(PANELS REMOVED)

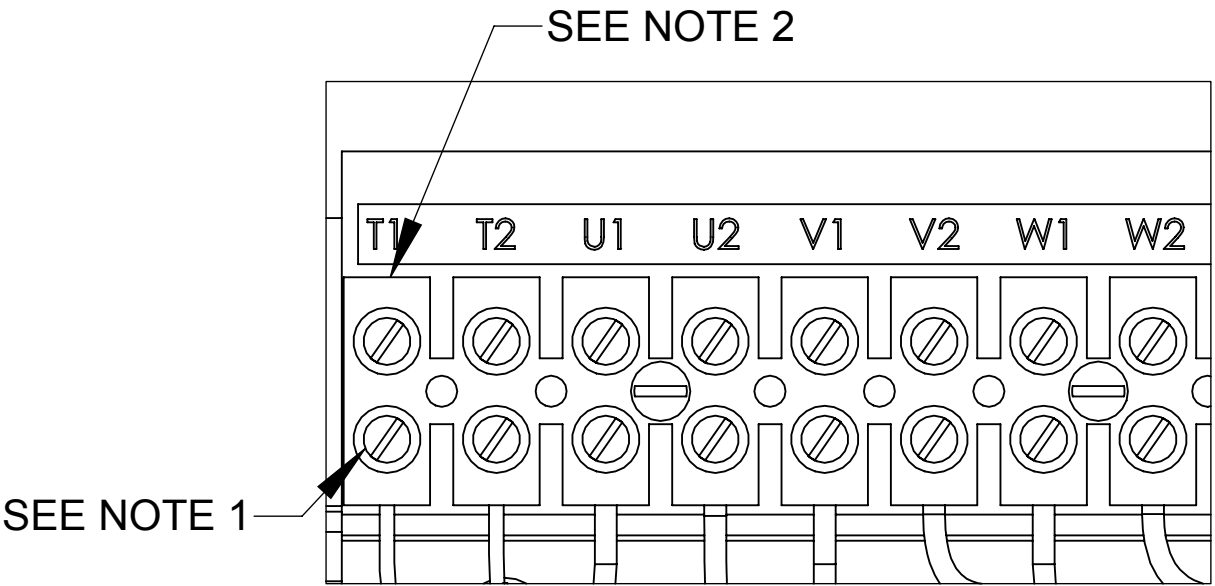

DETAIL A
CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. TIGHTEN TERMINAL SCREW WIRES TO 16 IN/LBS. TORQUE.
2. TERMINAL WIRE SIZE: 4-14 AWG.

| | | | | | |
|--|--|---|--|--|--|
| THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2 | | MATERIAL | | CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION | |
| CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION | | | | DESCRIPTION | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254] | | MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253-8200 | | SWG 5A 600V 2-8kHz FILTER, NEMA 3R ENCL. | |
| DRAWN MN | | DATE 07/17/18 | | SIZE D | |
| CHECKED MN | | DATE 07/17/18 | | DWG No. CD SWGW0005E | |
| APPROVED TL | | DATE 10/09/18 | | REV 00 | |
| SCALE 1:3 | | | | SHEET 1 OF 1 | |