WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
193	.080mH	695

ECO No	DESCRIPTION	REV BY	DATE
M8280	REDRAW IN SOLIDWORKS	JP	11/07/12

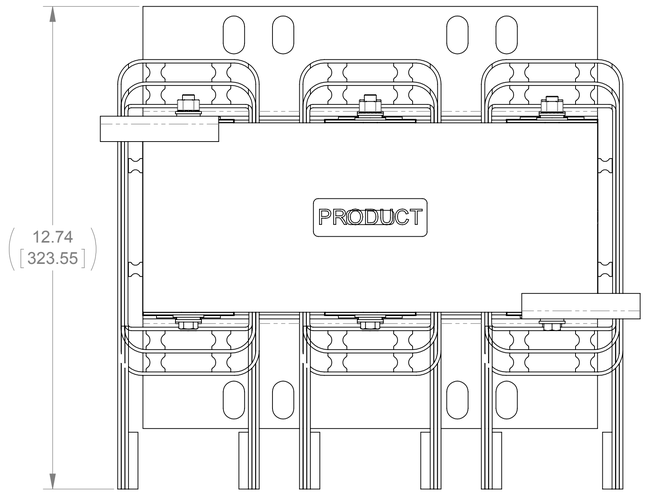

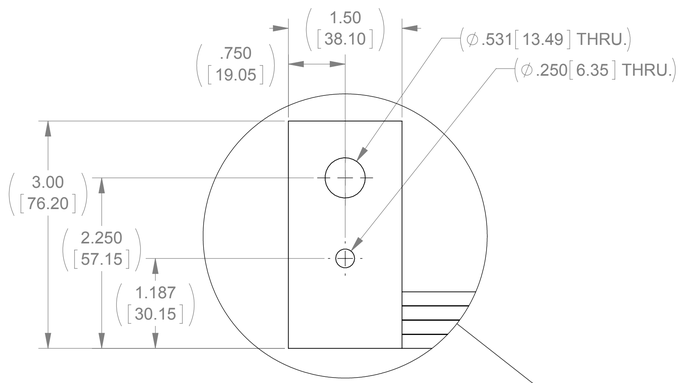

DETAIL A
6 PLACES

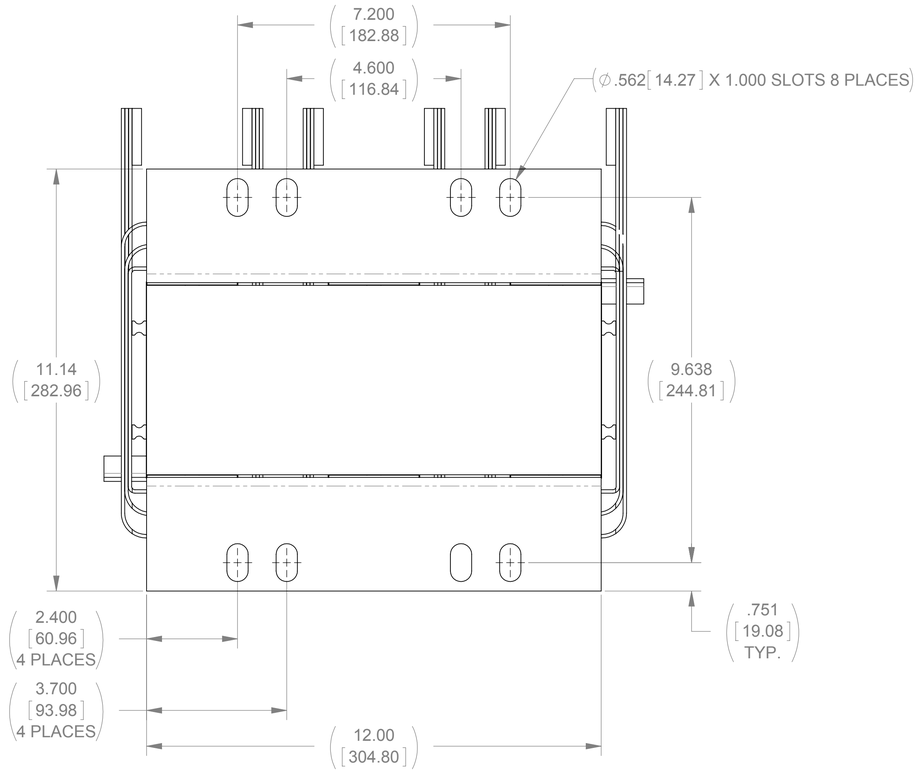

VIEW A-A

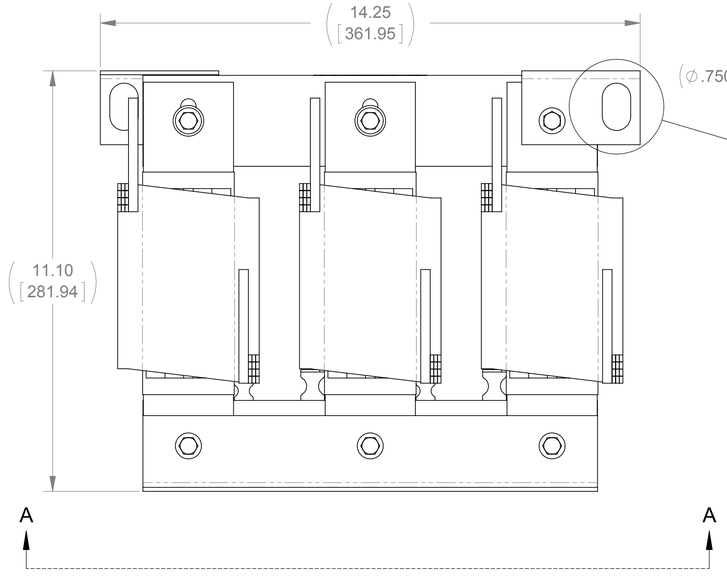

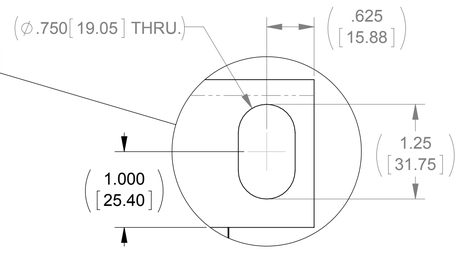

DETAIL B
2 PLACES

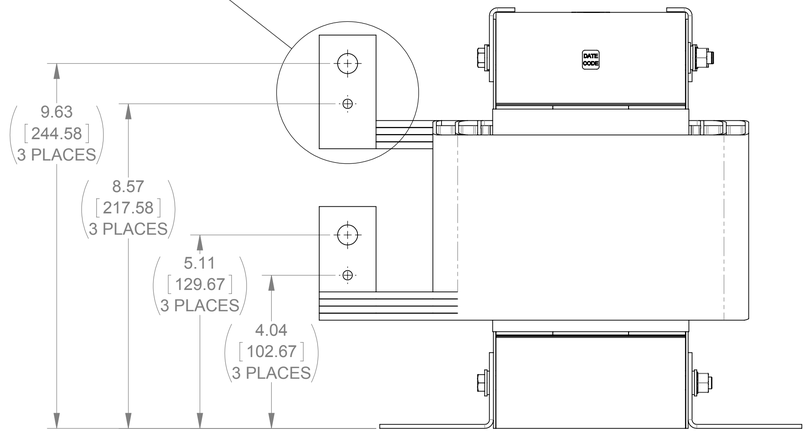

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
AN EL POWER ELECTRONICS COMPANY
N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN: RKT	DATE: 08/04/09
CHECKED: TM	DATE: 11/07/12
APPROVED: TM	DATE: 11/07/12

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION: 3 PHASE REACTOR

SIZE	DWG No	REV
D	CD RLW-051505	02

SCALE 1:2 SHEET 1 OF 1