
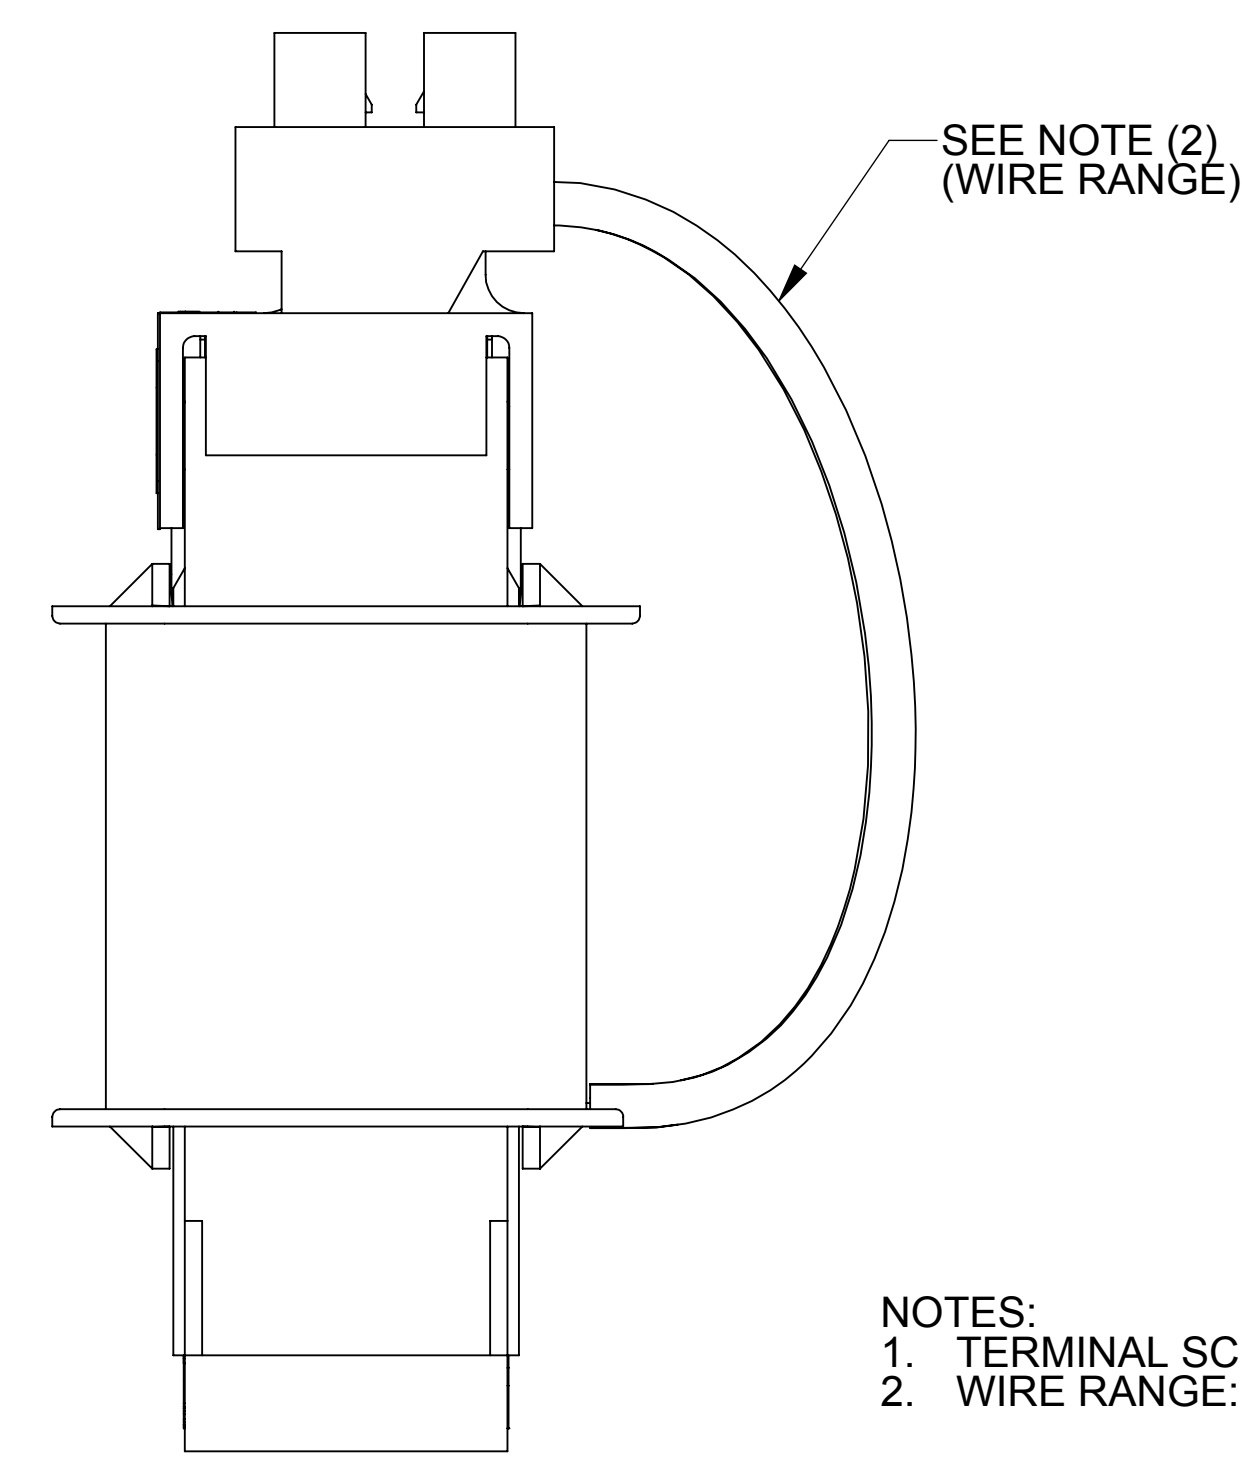



VIEW A-A

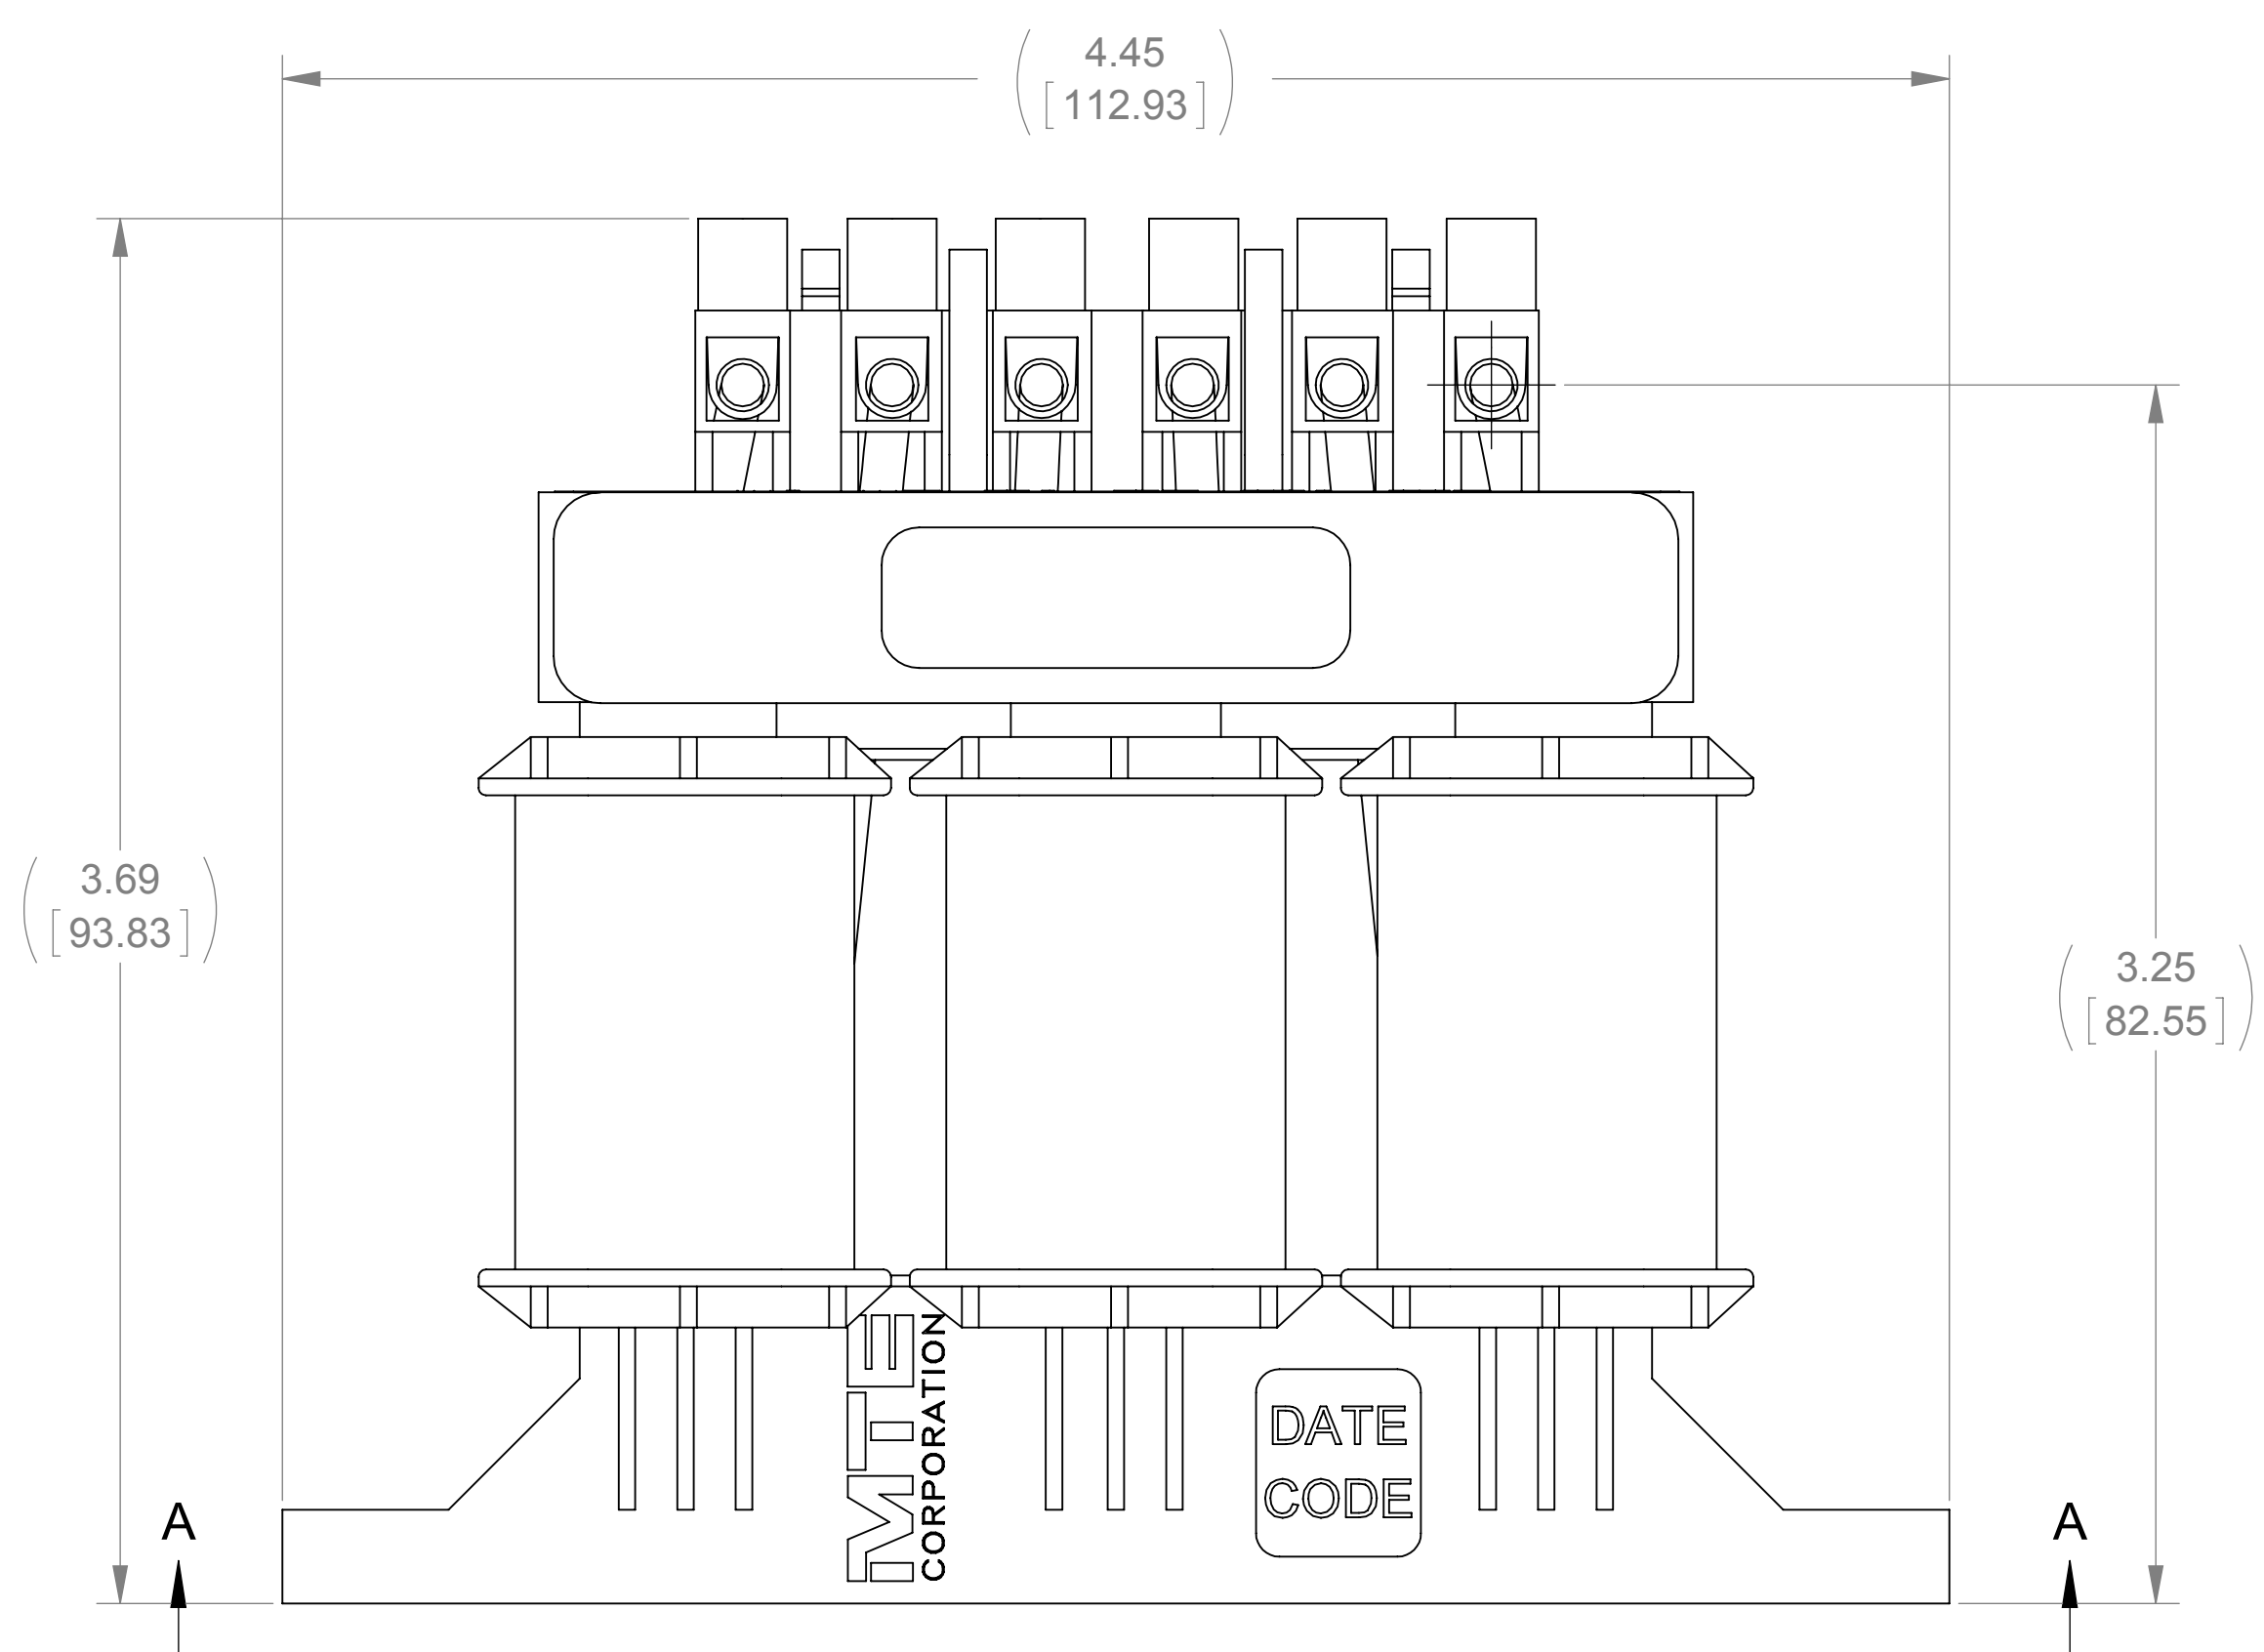

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE; 4.5 in-lb MAX.
2. WIRE RANGE: 22-10 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		 <small>AN BL POWER ELECTRONICS COMPANY</small> N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253-8200		DRAWN JP 07/31/12		
CHECKED JH 08/07/12						
APPROVED JH 08/07/12			DATE 08/07/12			
SIZE D		DWG No. CD RLW-01P106		REV 04		
SCALE 2:1				SHEET 1 OF 1		